



US010132456B2

(12) **United States Patent**
Jurik et al.

(10) **Patent No.:** **US 10,132,456 B2**
(45) **Date of Patent:** **Nov. 20, 2018**

(54) **DUAL GRAPHIC WHEEL FOR AN
AUTOMATED LUMINAIRE**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Robe Lighting s.r.o.**, Roznov pod
Radhostem (CZ)
(72) Inventors: **Pavel Jurik**, Prostedrni Becva (CZ);
Josef Valchar, Prostedrni Becva (CZ)
(73) Assignee: **Robe Lighting s.r.o.**, Roznov pod
Radhostem (CZ)
(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

4,037,097 A	7/1977	Stillman et al.	
4,618,918 A	10/1986	Zhabokrug	
5,113,332 A	5/1992	Richardson	
5,416,681 A	5/1995	Wu	
6,726,333 B2 *	4/2004	Huibers	G02B 26/008
			348/E9.027
7,050,120 B2 *	5/2006	Allen	H04N 9/3114
			348/742
7,283,181 B2 *	10/2007	Allen	G02B 26/008
			348/602
7,905,630 B2	3/2011	Dalsgaard	
8,684,561 B2 *	4/2014	Quadri	F21S 10/007
			362/285
2003/0076681 A1	4/2003	Rasmussen et al.	
		(Continued)	

(21) Appl. No.: **14/495,856**

(22) Filed: **Sep. 24, 2014**

FOREIGN PATENT DOCUMENTS

(65) **Prior Publication Data**
US 2016/0084457 A1 Mar. 24, 2016
US 2018/0195679 A9 Jul. 12, 2018

EP	0442169 A2	8/1991
EP	1079174 A1	2/2001
WO	2011119450 A1	9/2011

Related U.S. Application Data

OTHER PUBLICATIONS

(63) Continuation of application No. 13/438,841, filed on
Apr. 3, 2012.
(60) Provisional application No. 61/471,683, filed on Apr.
4, 2011.

Office Action dated Aug. 5, 2013; U.S. Appl. No. 13/438,841, filed
Apr. 3, 2012; 5 pages.
(Continued)

(51) **Int. Cl.**
F21S 10/00 (2006.01)
F21V 11/08 (2006.01)
F21W 131/406 (2006.01)

Primary Examiner — Laura Tso
(74) *Attorney, Agent, or Firm* — Conley Rose, P.C.; Grant
Rodolph; Brooks W Taylor

(52) **U.S. Cl.**
CPC **F21S 10/007** (2013.01); **F21V 11/08**
(2013.01); **F21W 2131/406** (2013.01)


(57) **ABSTRACT**

(58) **Field of Classification Search**
CPC F21S 10/007; F21W 3231/406
USPC 362/280, 281, 282, 283, 284, 322, 323,
362/324

An automated luminaire with dual over-sized graphic
wheels that can be inserted and positioned into or out of the
light path of the luminaire together as a unit and each
graphic wheel can be rotated independent of the other wheel.

See application file for complete search history.

9 Claims, 13 Drawing Sheets

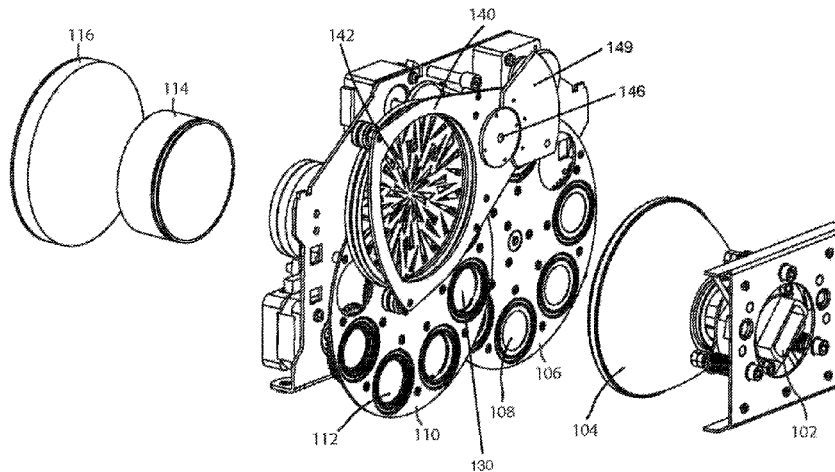

(56)

References Cited

U.S. PATENT DOCUMENTS

2009/0303723 A1 12/2009 Cavenati et al.
2013/0094219 A1 4/2013 Jurik et al.
2018/0135820 A1 5/2018 Jurik et al.

OTHER PUBLICATIONS

Final Office Action dated Mar. 24, 2014; U.S. Appl. No. 13/438,841, filed Apr. 3, 2012; 5 pages.

PCT International Search Report; Application No. PCT/US2012/032185; dated Nov. 16, 2012; 4 pages.

PCT Written Opinion of the International Searching Authority; Application No. PCT/US2012/032185; dated Nov. 16, 2012; 4 pages.

Chinese Office Action; Application No. 201280021667.9; dated Apr. 8, 2015; 9 pages.

Chinese Office Action; Application No. 201280021667.9; dated Dec. 9, 2015; 9 pages.

Chinese Notification to Grant Patent Right; Application No. 201280021667.9; dated Aug. 16, 2016; 3 pages.

European Intention to Grant; Application No. 12759839.9; dated Apr. 4, 2016; 6 pages.

Final Office Action dated Aug. 7, 2018; U.S. Appl. No. 15/712,961, filed Sep. 22, 2017; 11 pages.

* cited by examiner

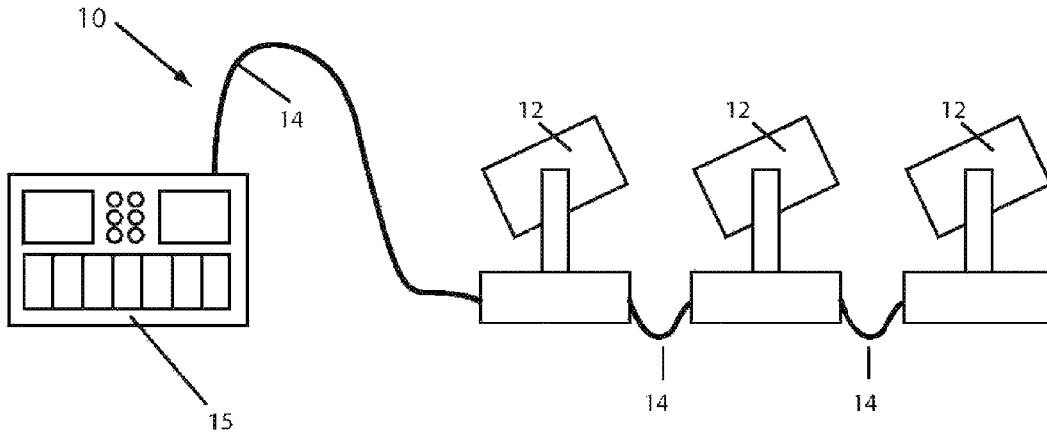


FIG 1
(Prior Art)

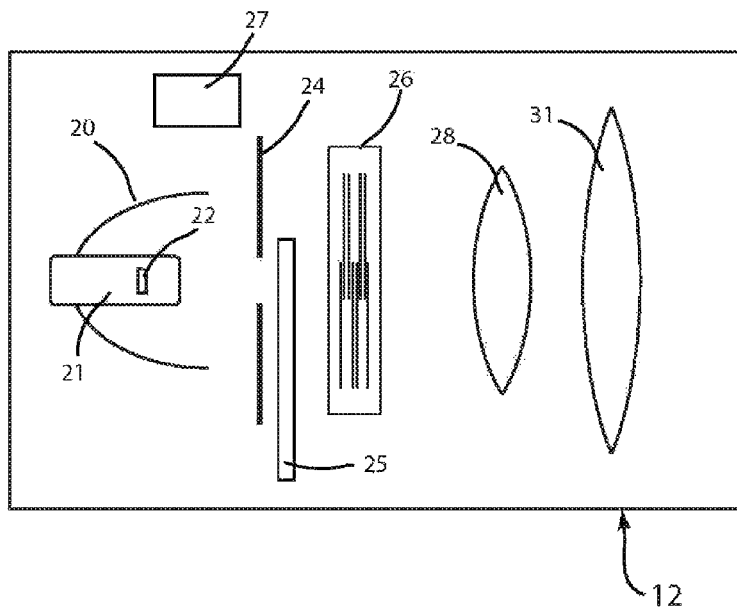


FIG 2
(Prior Art)

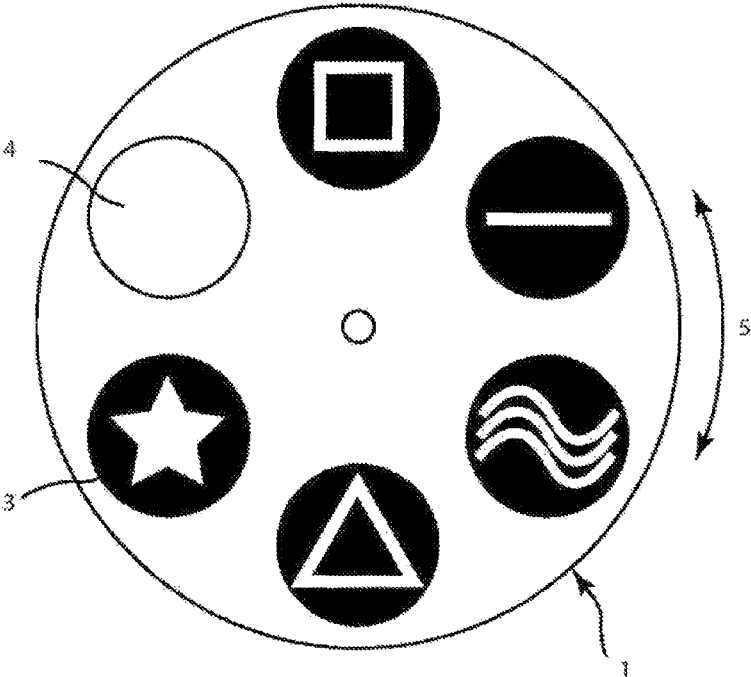


FIG 3
(prior art)

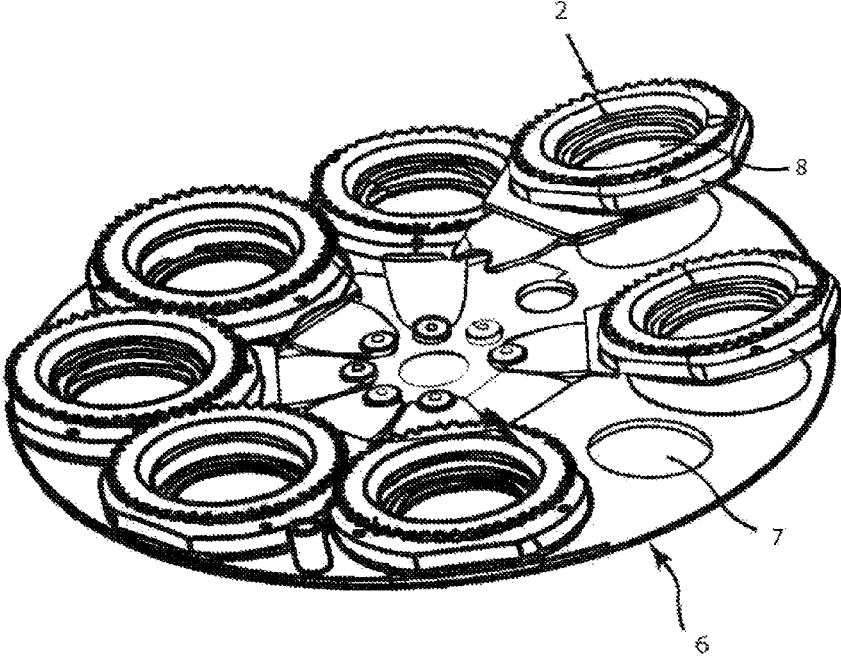


FIG 4
(prior art)

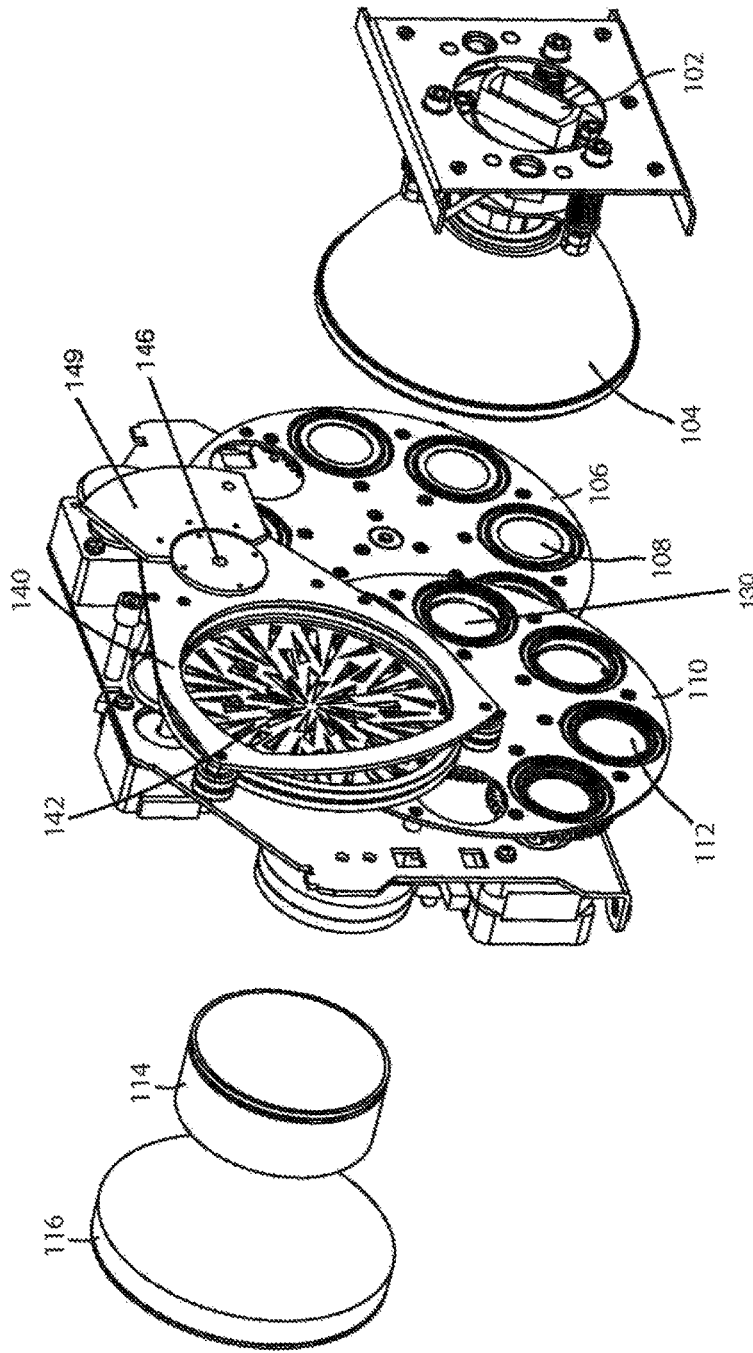
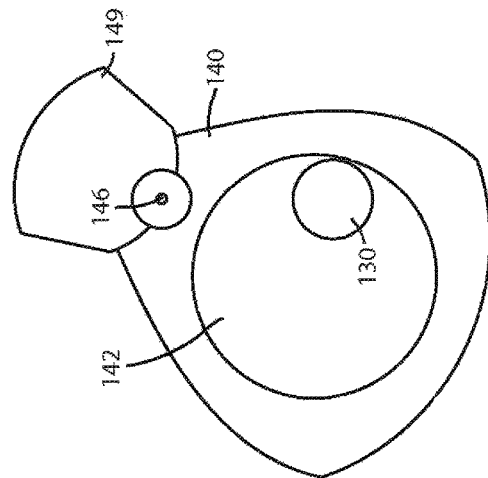
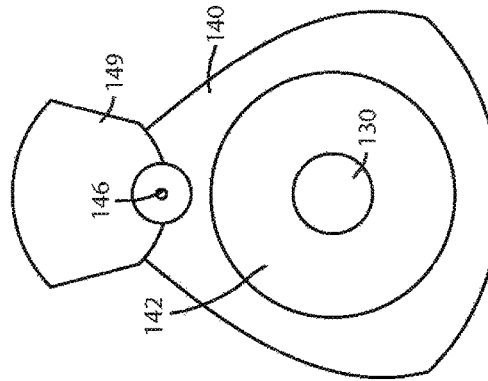
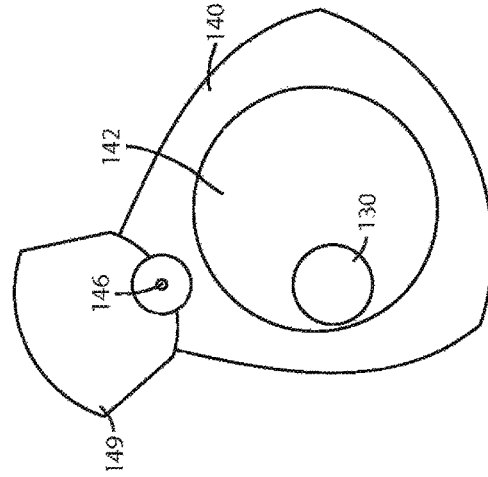
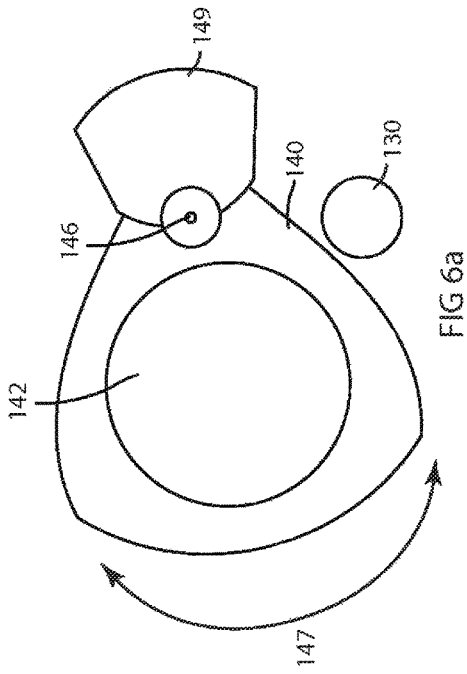


FIG 5



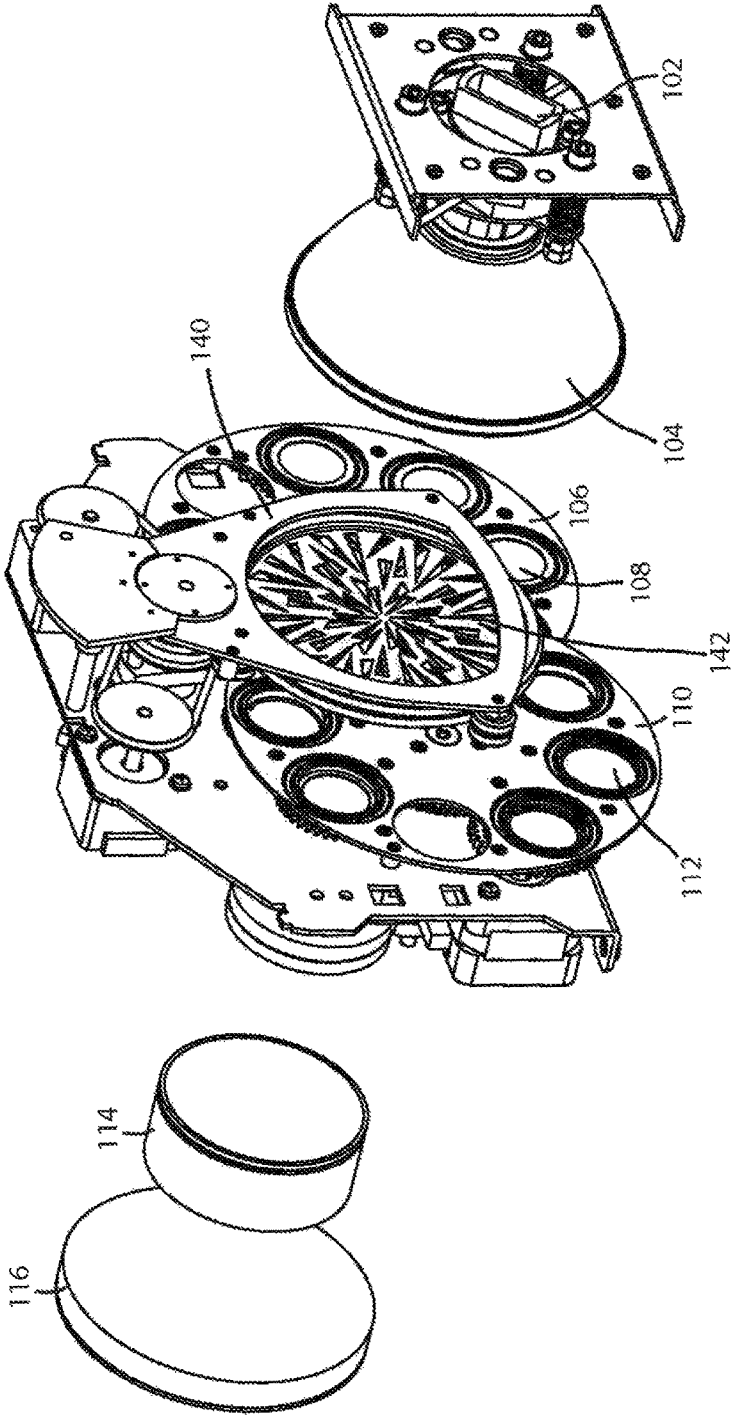


FIG 7

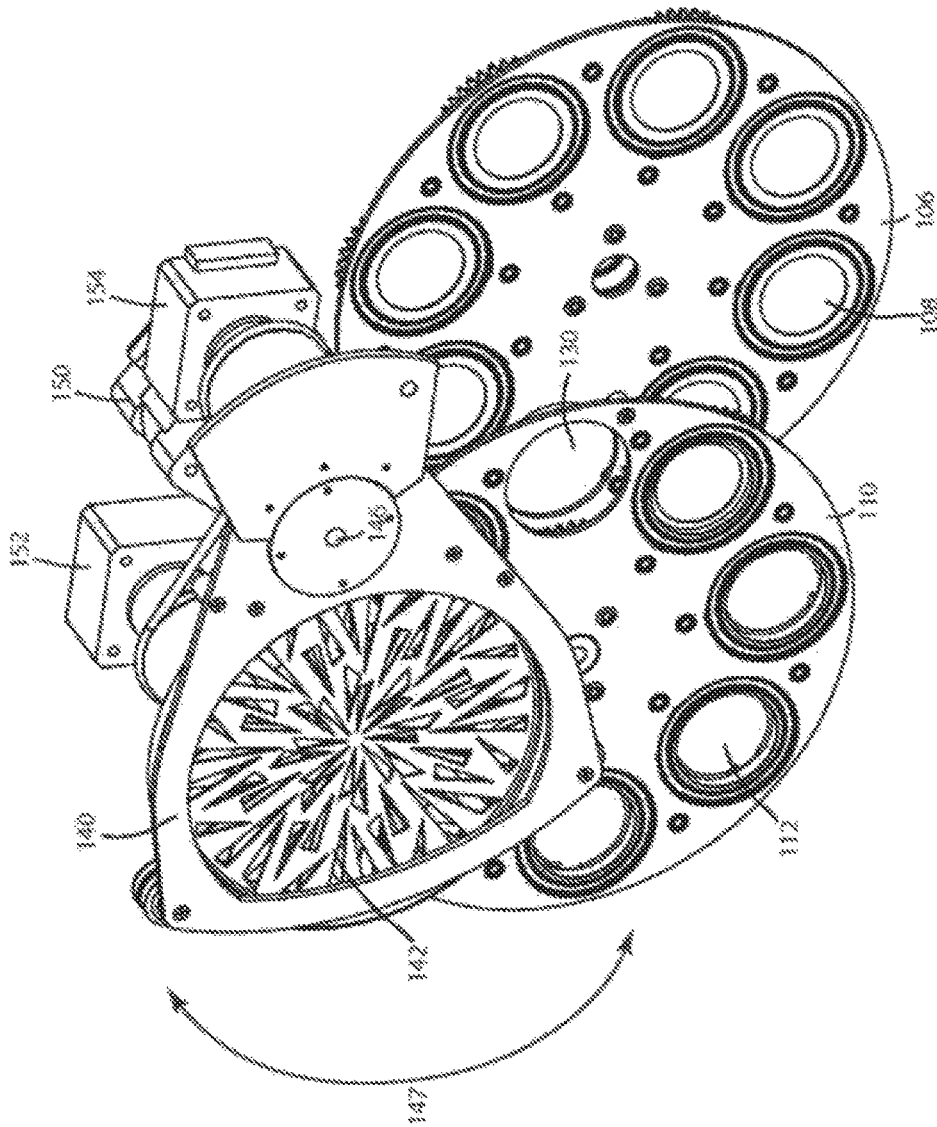


FIG 8

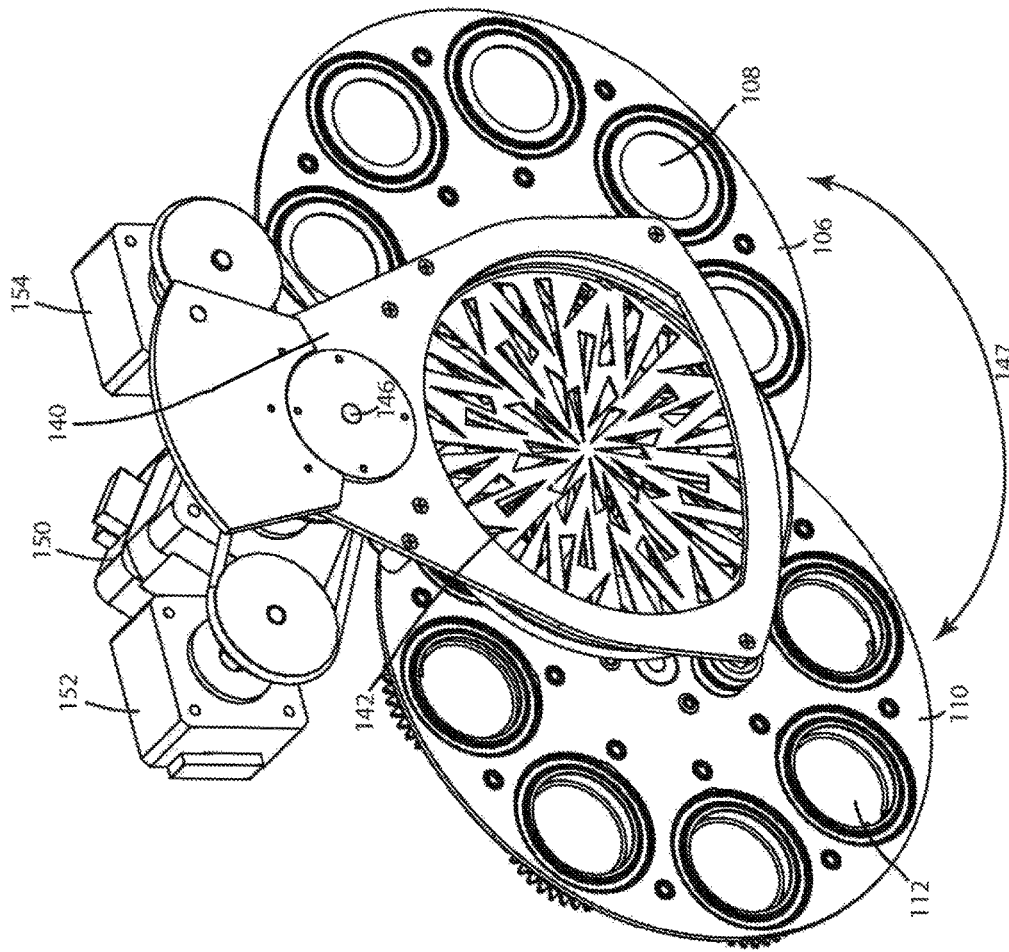


FIG 9

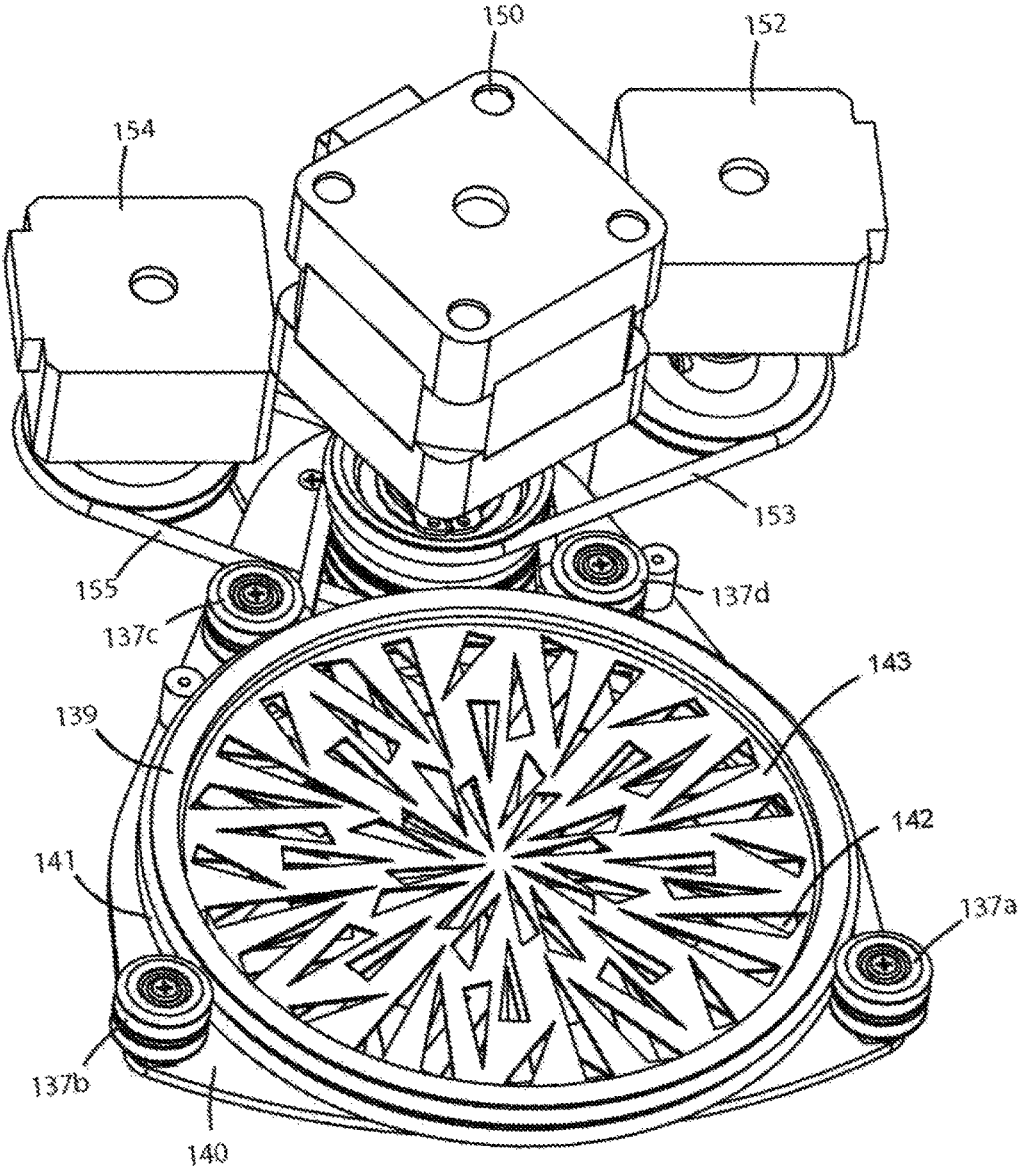


FIG 10

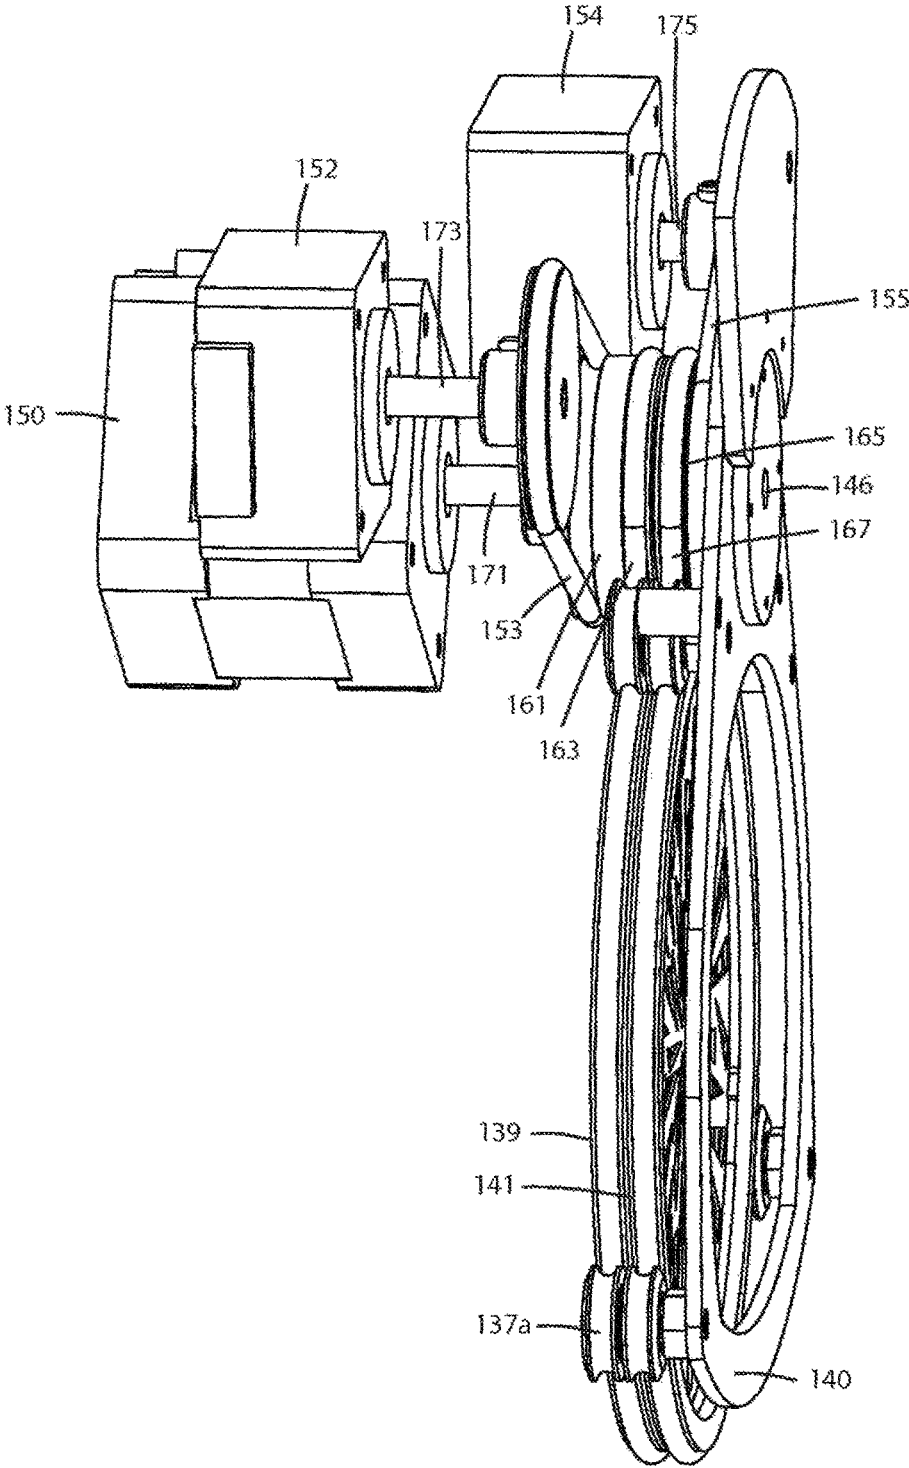


FIG 11

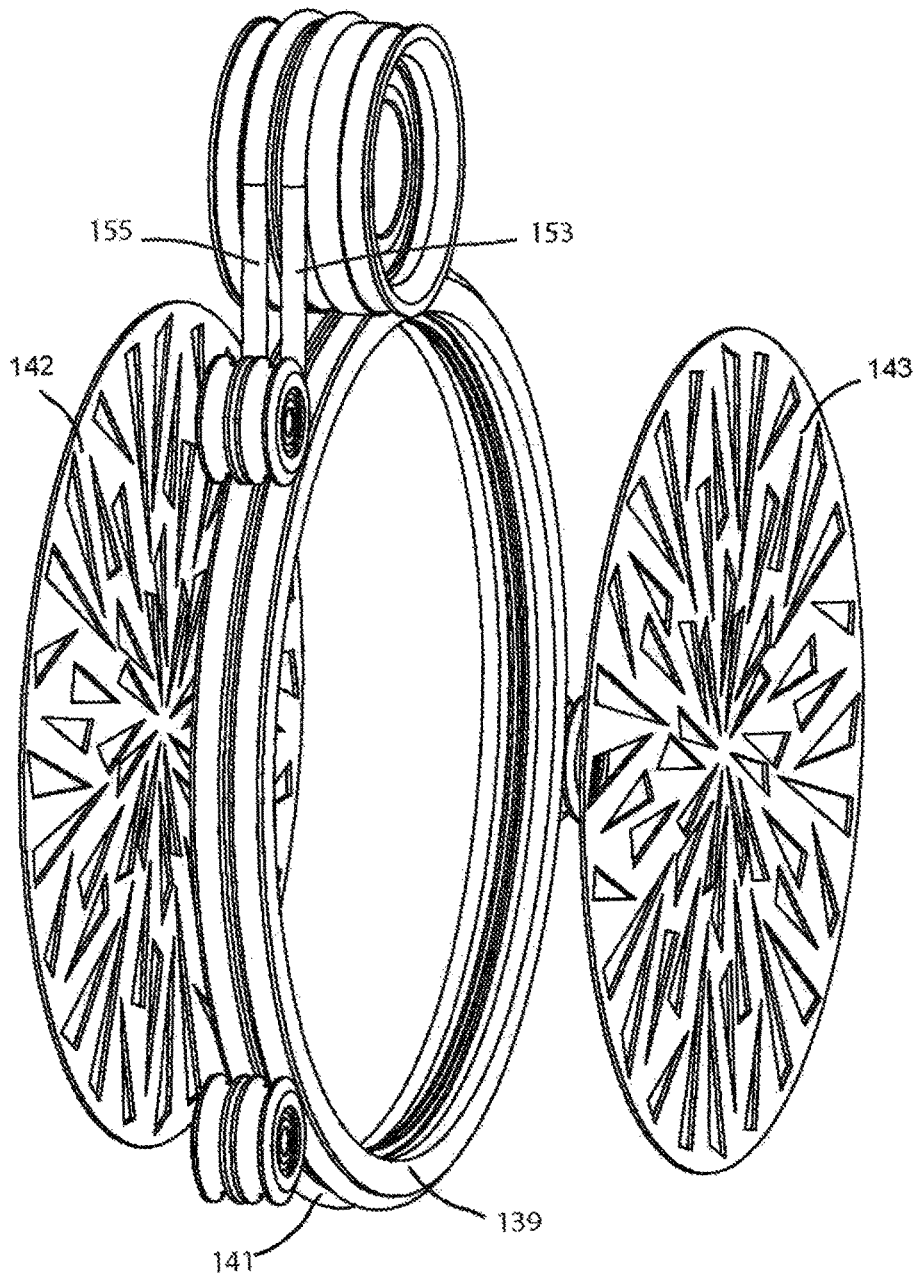


FIG 12

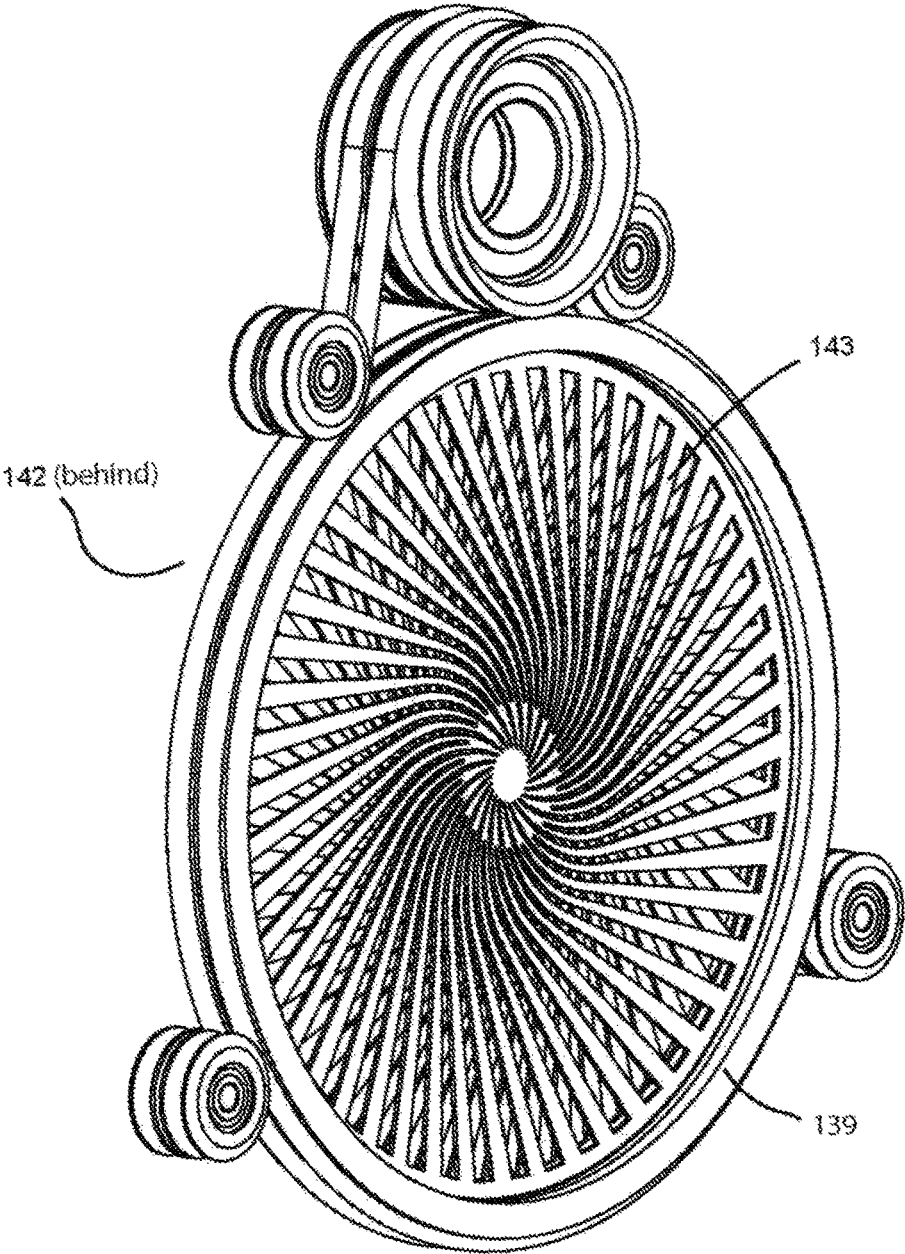


FIG 13

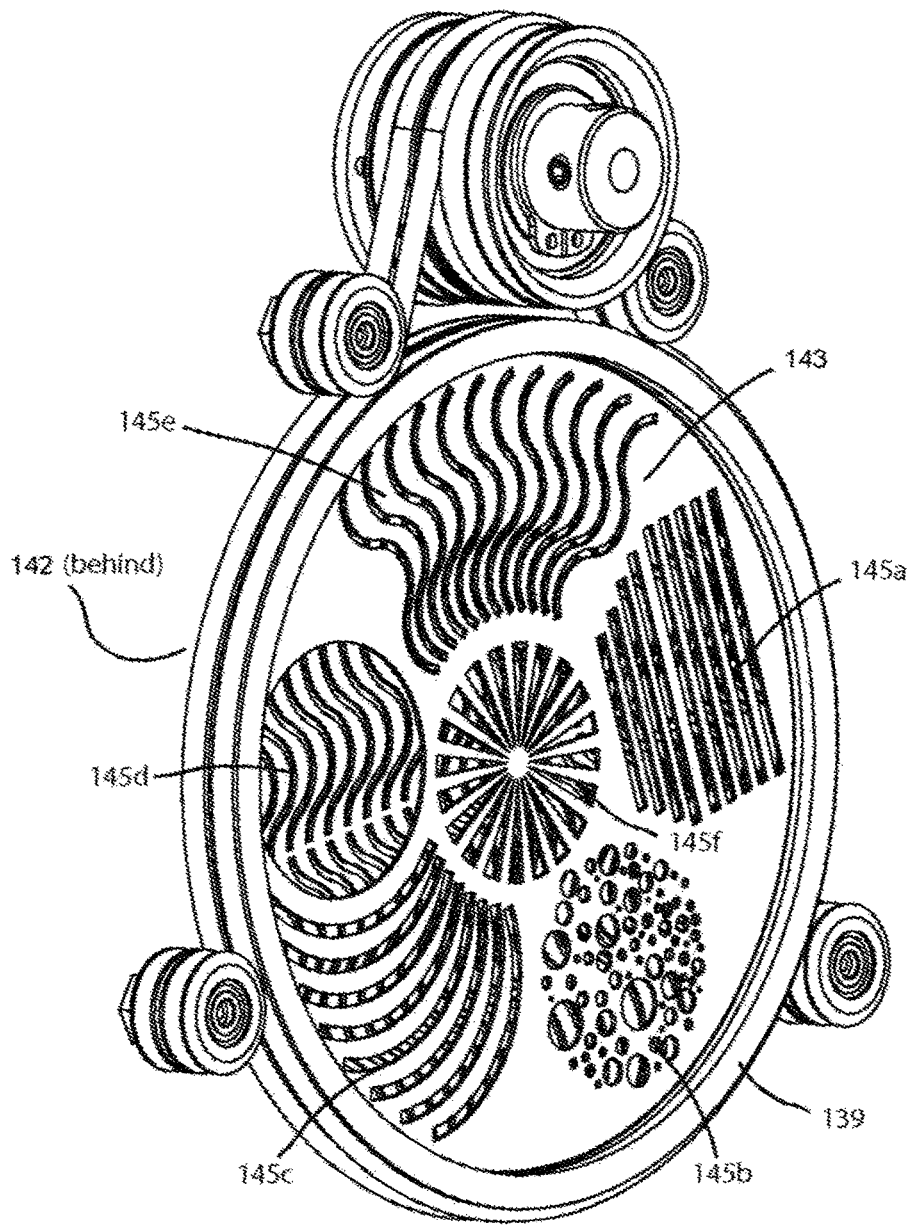


FIG 14

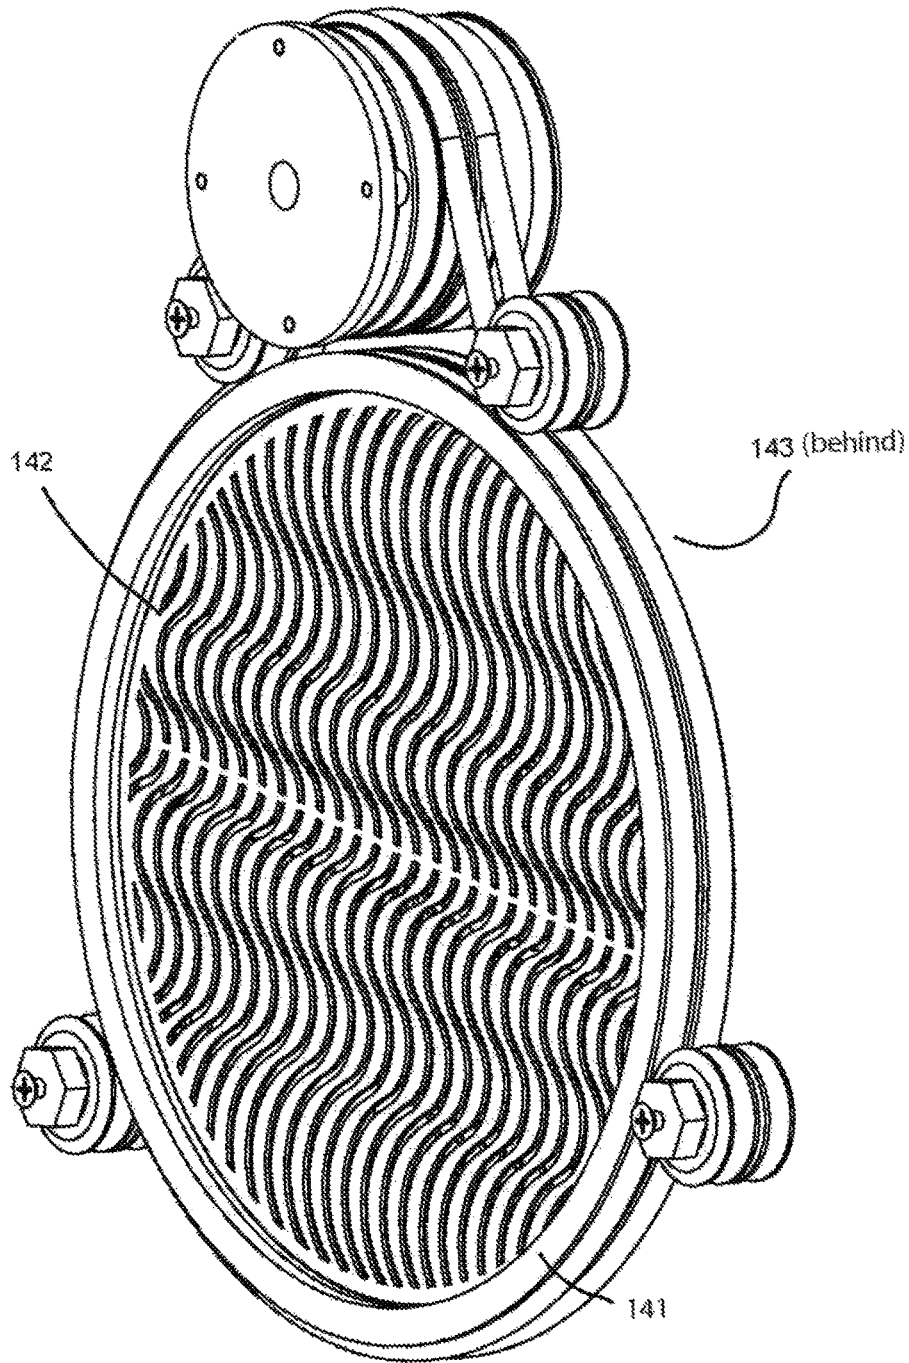


FIG 15

1

DUAL GRAPHIC WHEEL FOR AN AUTOMATED LUMINAIRE

TECHNICAL FIELD OF THE INVENTION

The invention relates to equipment for the selection and movement of images or gobos within an automated luminaire.

BACKGROUND OF THE INVENTION

Luminaires with automated and remotely controllable functionality are well known in the entertainment and architectural lighting markets. Such products are commonly used in theatres, television studios, concerts, theme parks, night clubs and other venues. A typical product will commonly provide control over the pan and tilt functions of the luminaire allowing the operator to control the direction the luminaire is pointing and thus the position of the light beam on the stage or in the studio. Typically this position control is done via control of the luminaire's position in two orthogonal rotational axes usually referred to as pan and tilt. Many products provide control over other parameters such as the intensity, color, focus, beam size, beam shape and beam pattern. The beam pattern is often provided by a stencil or slide called a gobo which may be a steel, aluminum or etched glass pattern. The products manufactured by Robe Show Lighting such as the ColorSpot 700E are typical of the art.

Such gobos are typically the size of the luminaire's optical aperture and systems may be provided to select between different gobos, often mounted on a wheel, or to rotate a gobo once selected. The optical systems of such luminaires may further include gobos, patterns or other optical effects which are larger than the optical aperture and may allow movement across or through the beam to produce effects such as rainfall or fire. Such devices are often termed animation wheels and may be included in addition to gobos so as to further modify the light beam.

FIG. 1 illustrates a multiparameter automated luminaire system 10. These systems commonly include a plurality of multiparameter automated luminaires 12 which typically each contain on-board a light source (not shown), light modulation devices, electric motors coupled to mechanical drives systems and control electronics (not shown). In addition to being connected to mains power either directly or through a power distribution system (not shown), each luminaire is connected in series or in parallel to data link 14 to one or more control desks 15. The luminaire system 10 is typically controlled by an operator through the control desk 15.

FIG. 2 illustrates a automated luminaire 12. A lamp 21 contains a light source 22 which emits light. The light is reflected and controlled by reflector 20 through an aperture or imaging gate 24 and through an animation wheel 25. The resultant light beam may be further constrained, shaped, colored and filtered by optical devices 26 which may include dichroic color filters, gobos, rotating gobos, framing shutters, effects glass and other optical devices well known in the art. The final output beam may be transmitted through output lenses 28 and 31 which may form a zoom lens system. The automated, or remote controlled, movement of the components identified above are controlled by onboard electronics and motor controllers 27 as well established in the art.

FIG. 3 illustrates a prior art gobo wheel 1 containing five gobos 3 and an open aperture. The wheel 1 may be rotated

2

5 such that any of the gobos 3 may be positioned across the optical aperture of the luminaire 4.

FIG. 4 illustrates a further prior art gobo wheel 6. In this version the gobos 8 are contained within carriers 2 that may be rotated through gears 8. The wheel may be rotated such that any of the gobo carriers 2 containing a gobo 8 are positioned across the optical aperture of the luminaire 7 and said selected gobo carrier 2 may then be rotated around the optical axis of the luminaire producing a dynamic effect in the output beam.

In both examples, to change gobos from a first gobo to a second, non-adjacent, gobo requires that the wheel be rotated through all the gobos in between the first and second gobos. It would be advantageous if a gobo system could change from a first gobo to any second gobo without having to pass through intermediate gobos.

In addition it would be advantageous if gobos larger than the optical aperture could be inserted and removed from the optical aperture in any position or orientation. It would further be advantageous if two serially mounted gobos could be inserted and removed from the optical aperture such that overlay and moiré effects could be created.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention and the advantages thereof, reference is now made to the following description taken in conjunction with the accompanying drawings in which like reference numerals indicate like features and wherein:

- FIG. 1 illustrates a typical automated lighting system;
- FIG. 2 illustrates a typical automated luminaire;
- FIG. 3 illustrates a prior art gobo wheel;
- FIG. 4 illustrates a prior art rotating gobo wheel;
- FIG. 5 illustrates an embodiment of the positioning of the dual wheel embodiment of FIG. 5 among other light modulators in an automated luminaire;
- FIG. 6a-d illustrate various operational positions of the dual wheel;
- FIG. 7 illustrates an embodiment of FIG. 5 with the dual wheel in another position;
- FIG. 8 illustrates alternative viewing of positioning of components of the embodiment illustrated in FIG. 5;
- FIG. 9 illustrates alternative viewing of positioning of components of the embodiment illustrated in FIG. 7;
- FIG. 10 illustrates an embodiment of the drive system of the dual graphics wheel;
- FIG. 11 illustrates a slightly offset view of the drive system embodiment illustrated in FIG. 10;
- FIG. 12 illustrates an embodiment of a subset of the components of the embodiment illustrated in FIG. 10;
- FIG. 13 illustrates an alternative embodiment of the graphic wheels;
- FIG. 14 illustrates another alternative embodiment of the graphic wheels, and;
- FIG. 15 illustrates an offset backside view of the embodiment of the graphic wheels illustrated in FIG. 14.

DETAILED DESCRIPTION OF THE INVENTION

Preferred embodiments of the present invention are illustrated in the FIGURES, like numerals being used to refer to like and corresponding parts of the various drawings.

The present invention generally relates to an automated luminaire, specifically to the configuration of a graphic wheel within such a luminaire such that gobos larger than

the optical aperture may be utilized, such that serially mounted gobos may be overlaid, and such that selection may be made between any two gobos, adjacent or non-adjacent, without the need to pass through intermediate gobos.

FIG. 5 illustrates an embodiment of the invention. Lamp 102 is mounted within reflector 104 and directs a light beam through prior art rotating gobo wheels 106 and 110. Rotating gobo wheel 106 may be rotated such that any of the gobos 108 are positioned across the optical aperture and rotating gobo wheel 110 may be rotated such that any of the gobos 112 are positioned across the optical aperture 130. The resultant light beam is directed through output lenses 114 and 116 which may be adjusted so as to move the focal point of the system such that any optical component is in focus in the output beam. A dual graphic wheel 141 includes a carrier plate 140 which carry the graphic wheels 142 and 143 (143 not identified in this view). Graphic wheel carrier plate 140 may be rotated about axis 146 such that large gobo 142 is positioned across the optical aperture of the luminaire. In the position illustrated in FIG. 5 gobo 142 is outside of the optical path and not across the optical aperture 130.

FIGS. 6a-d illustrate a schematic drawing of an embodiment of the invention. Graphic wheel carrier plate 140 contains a gobo 142. Gobo 142 may be a single pattern or incorporate multiple patterns and may be replaceable on carrier plate 140. Carrier plate 140 may be rotated around pivot axis 146 such that gobo 142 is moved across the optical aperture 130 of the luminaire. Gobo 142 may be substantially larger than the optical aperture 130. In the embodiment shown, the diameter of the graphic wheel 142 is over three times the diameter of the aperture 130. Other relative sizes are also possible but for the desired effect and functionality the relative size should be substantially larger than the relative size of the gobos in the prior art gobo wheels illustrated in FIG. 3 and FIG. 4 Carrier plate 140 may have a counterweight 149 such that the assembly is substantially balanced around pivot axis 146.

FIG. 6a shows carrier plate 140 positioned such that gobo 142 is outside the optical aperture 130 and thus has no effect on the projected light beam.

FIG. 6b shows carrier plate 140 positioned such that gobo 142 is across the optical aperture 130. In this position the focus mechanism of the luminaire may be adjusted such that the patterns or images on gobo 130 are in focus in the projected image or are out of focus in the projected image. The edge of gobo 142 is adjacent to optical aperture 130 such that gobo 142 may be rotated around its centre point (not identified) to provide a arc movement of the pattern across the optical aperture 130.

FIG. 6c shows carrier plate 140 positioned such that gobo 142 is across the optical aperture 130. In this position the focus mechanism of the luminaire may be adjusted such that the patterns or images on gobo 130 are in focus in the projected image or are out of focus in the projected image. The centre of gobo 142 is coincident/concentric with the centre of optical aperture 130 such that gobo 142 may be rotated around its centre point to provide a rotation movement of the pattern around the centre of the optical aperture 130.

FIG. 6d shows carrier plate 140 positioned such that gobo 142 is across the optical aperture 130. In this position the focus mechanism of the luminaire may be adjusted such that the patterns or images on gobo 130 are in focus in the projected image or are out of focus in the projected image. The edge of gobo 142 is adjacent to optical aperture 130 such that gobo 142 may be rotated around its centre point to provide a movement of the pattern across the optical aper-

ture 130. Gobo 142 is positioned such that the opposite edge to the position illustrated in FIG. 6b is across the optical aperture 130, thus, for the same rotation direction of gobo 142, arc movement of the pattern across the optical aperture will be in the opposite direction.

Although three positions have been illustrated, the invention is not so limited and graphic wheel carrier plate 140 may be positioned by rotation around pivot point 146 such that any portion of gobo 142 defined by an arc drawn around pivot point 146 may be placed across optical aperture 130.

FIG. 7 illustrates an embodiment of the invention. Lamp 102 is mounted within reflector 104 and directs a light beam through gobos in prior art rotating gobo wheels 106 and 110. Rotating gobo wheel 106 may be rotated such that any of the gobos 108 are positioned across the optical aperture and rotating gobo wheel 110 may be rotated such that any of the gobos 112 are positioned across the optical aperture. The resultant light beam is directed through output lenses 114 and 116 which may be adjusted so as to move the focal point of the system such that any optical component is in focus in the output beam. Graphic wheel carrier plate 140 may be rotated such that large gobo 142 is positioned across the optical aperture of the luminaire. In the position illustrated in FIG. 7 gobo 142 is inside the optical path and is positioned across the optical aperture (not seen in FIG. 7). In this position lenses 114 and 116 may be adjusted such that any of the optical elements including gobo wheel 106, gobo wheel 110 and gobo 142 are in focus in the output beam.

FIG. 8 illustrates a more detailed view of an embodiment of the invention. Rotating gobo wheel 106 may be rotated such that any of the gobos 108 are positioned across the optical aperture 130 and rotating gobo wheel 110 may be rotated such that any of the gobos 112 are positioned across the optical aperture 130. Graphic wheel carrier plate 140 may be rotated 147 by motor 150 around pivot axis 146 such that large gobo 142 is positioned across the optical aperture 130 of the luminaire. In the position illustrated in FIG. 8 gobo 142 is outside of the optical path and not across the optical aperture 130.

FIG. 9 illustrates the same system depicted in FIG. 8 showing a situation where graphic wheel carrier plate 140 has now been rotated by motor 150 around pivot axis 146 such that large gobo 142 is positioned across the optical aperture (not seen in FIG. 9) of the luminaire. In this position light will travel through both large gobo 142 as well as gobos on rotating gobo wheels 106 and 110. Further, gobo 142 may be rotated around its own centre by motor 152 as further described below.

FIG. 10 illustrates a detailed backside view of the graphic wheel mechanism of an embodiment of the invention. In this embodiment graphic wheel carrier plate 140 carries two serially mounted, concentric gobos 143 and 142. First gobo 143 is mounted within rim 139 and second gobo 142 is mounted within rim 141. First and second gobos 143 and 142 are concentric and will move together with carrier plate 140 such that both of them will be moved across the optical aperture together. Rim 139 and rim 141 are constrained by, but free to rotate within, bearings dual 137a, 137b, 137c and 137d. Each dual bearing allows individual rotation of Rim 139 from rotation of Rim 141. Rim 139, and thus contained first gobo 143, is connected by belt 153 to motor 152. Similarly rim 141, and thus contained second gobo 142, is connected by belt 155 to motor 154. Rotation of motor 152 will cause rotation of rim 139 and contained first gobo 143. Rotation of motor 154 will cause rotation of rim 141 and contained second gobo 142. Rotation of motor 150 will rotate the carrier plate 140 across or away from the optical

aperture as previously described. Motors **150**, **152** and **154** may be of a type selected from a list comprising but not limited to, stepper motors, servo motors, and linear actuators.

Through this mechanism, by coordinated and separate adjustment of motors **150**, **152** and **154**, carrier plate **140** and attached first and second gobos **142** and **143** may be positioned such that the desired area of first and second gobos **142** and **143** are positioned across the optical aperture. Once in position either or both of first and second gobos **142** and **143** may be independently and separately rotated about its own centre point. First and second gobos **142** and **143** may contain the same pattern or different patterns. The patterns may be chosen such that the movement of first gobo **142** relative to second gobo **143** produces moiré, kaleidoscopic, or other interference effects. Such effects may be produced independently or in conjunction with gobos on prior art gobo or rotating gobo wheels or other optical devices in the luminaire as well known in the art.

FIG. **11** illustrates a slightly offset view of the drive system for the graphic wheels **143** and **142** illustrated in FIG. **10**. The rotation of carrier **140** is driving by motor **150** via shaft **171** about axis **146**. Shaft **171** also supports idler pulleys **161** and **165** but does not impede their rotation of the idler pulleys **161** and **165**. Idler pulley **161** has two grooves for accepting drive belts **152** and **163**. While idler pulley **165** has two grooves for accepting drive belts **167** and **155**. In this way drive belts **163** and **167**, which drive rotation of the frames **139** and **141** respectively which in turn rotate graphic wheels **143** and **142** respectively, are right next to each other so that the graphic wheels are right next to each other. Rotation of frame **139** and wheel **143** is driven by motor **152** which rotates shaft **173** which drives belt **153** which rotates idler pulley **161** which drives belt **163**. Rotation of frame **141** and wheel **142** is driven by motor **154** which rotates shaft **175** which drives belt **155** which rotates idler pulley **165** which drives belt **167**. The frames are held in place by dual idler bearings **137a**, **137b** (not identified in FIG. **11**), **137d** (not identified in FIG. **11**) and **137c** (not seen in FIG. **11**) as previously described above.

FIG. **12** illustrates an exploded view of an embodiment of the invention. First gobo **142** mounts within first rim **139** which may be rotated about its centre point by first belt **153**. Second gobo **143** mounts within second rim **141** which may be rotated about its centre by second belt **155**. First and second gobos **142** and **143** may be easily removed and replaced such that the user can change the effect produced.

FIG. **12** illustrates an embodiment of the invention where first and second gobos **143** and **142** have patterns that provide a moiré or kaleidoscopic effect.

FIGS. **13** and **14** illustrate the reverse and obverse views of an embodiment of the invention. In this embodiment first gobo **143** contains a plurality of smaller patterns within it, **145a**, **145b**, **145c**, **145d**, **145e** and **145f**. By coordinated and separate adjustment of the motors first gobo **143** may be positioned and rotated such that any of the smaller patterns **145a**, **145b**, **145c**, **145d**, **145e** or **145f** is positioned across the optical aperture of the luminaire. In such position the second gobo **142** may contain a break up pattern as illustrated herein. By altering the focal position of the optical system the user can superimpose or overlay this break up pattern over the pattern from first gobo **143**. By rotating second gobo **142** an effect may be created to simulate fire or water movement. It can further be seen that by positioning gobo **143** prior to moving it across the aperture it is possible to directly select any of the smaller patterns **145a**, **145b**, **145c**, **145d**, **145e** or **145f** without the need to pass through

any other gobos. Further, to move from a first small pattern chosen from **145a**, **145b**, **145c**, **145d**, **145e** or **145f** to a second small pattern chosen from **145a**, **145b**, **145c**, **145d**, **145e** or **145f** the user may choose to either move directly to the second small pattern without concern for intervening patterns or may choose to first remove gobo **143** from the optical aperture using motor **150** before continuing to select a second small pattern. Thus the operator has complete control over the route taken from a first pattern to a second pattern.

The specific mechanism illustrated herein using belts and bearings is illustrative only and not a limitation of the invention. Other mechanisms well known in the art to move carrier plate **140** and rotate first gobo **143** and second gobo **142** may be used without departing from the spirit of the invention.

In further embodiments either or both of first and second gobos **143** and **142** may comprise a piece of optical filter glass with, for example, lenticular lens pattern or prisms. Rotation of such a filter by motors **152** or **154** will cause a rotation of the optical effect caused by the optical filter glass.

In further embodiments the separation along the optical axis of the first gobo wheel, second gobo wheel and rotating gobo wheels may be minimized such that the optical system can focus on more than one of these optical elements at the same time.

In a further embodiment software in the automated luminaire may provide automated or semi-automated selection of motor control parameters, such that a single control selection by the user will recall combinations of positions of the rotating gobo wheels, graphic wheel carrier plate, first gobo rotation position, second gobo rotation position and other optical component parameters in order to provide a pleasing pre-defined effect. The user may then switch between many complex pre-defined effects through operation of this single control.

While the invention has been described with respect to a limited number of embodiments, those skilled in the art, having benefit of this invention, will appreciate that other embodiments may be devised which do not depart from the scope of the invention as disclosed herein. Accordingly, the scope of the invention should be limited only by the attached claims.

What is claimed is:

1. An automated luminaire comprising:

a plurality of light modulating wheels which are concentrically mounted on a carrier so that the wheels can be independently rotated about their centers without a mechanical connection to their centers;

where the carrier is mounted in the luminaire so that it can in an automated manner insert the concentric graphic wheels into the path of the light beam and in an automated manner be removed from the path of the light beam.

2. The automated luminaire of claim 1 where the modulating wheels causes a pattern to form in the light beam.

3. The automated luminaire of claim 1 where the modulating wheels are introduced near a focal plane in the light beam.

4. An automated luminaire comprising:

a plurality of light modulating wheels which are concentrically mounted on a carrier so that the wheels can be independently rotated about their centers via mechanical means on the outer circumference of the wheels; where the carrier is mounted in the luminaire so that it can in an automated manner insert the concentric graphic

wheels into the path of the light beam and in an automated manner be removed from the path of the light beam.

5. The automated luminaire of claim 4 where the modulating wheels causes a pattern to form in the light beam. 5

6. The automated luminaire of claim 4 where the modulating wheels are introduced near a focal plane in the light beam.

7. An automated luminaire comprising:

a plurality of light modulating wheels which are concentrically mounted on a carrier so that the wheels can be independently rotated about their centers with a mechanism which will not interfere with the light beam if the center of rotation of the wheel is in the path of the light beam; 15

where the carrier is mounted in the luminaire so that it can in an automated manner insert the concentric graphic wheels into the path of the light beam and in an automated manner be removed from the path of the light beam. 20

8. The automated luminaire of claim 7 where the modulating wheels causes a pattern to form in the light beam.

9. The automated luminaire of claim 7 where the modulating wheels are introduced near a focal plane in the light beam. 25

* * * * *