



(12) **United States Patent**
Quadri et al.

(10) **Patent No.:** **US 10,197,244 B2**
(45) **Date of Patent:** **Feb. 5, 2019**

- (54) **STAGE LIGHT FIXTURE**
- (71) Applicant: **CLAY PAKY S.P.A.**, Seriate (IT)
- (72) Inventors: **Pasquale Quadri**, Torre De'Roveri (IT); **Angelo Cavenati**, Brusaporto (IT)
- (73) Assignee: **CLAY PAKY S.P.A.**, Seriate (IT)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 443 days.

- (21) Appl. No.: **14/644,978**
- (22) Filed: **Mar. 11, 2015**
- (65) **Prior Publication Data**
US 2015/0260372 A1 Sep. 17, 2015

- (30) **Foreign Application Priority Data**
Mar. 12, 2014 (IT) MI2014A0388

- (51) **Int. Cl.**
F21V 9/40 (2018.01)
F21V 7/00 (2006.01)
F21S 10/00 (2006.01)
F21V 5/04 (2006.01)
F21V 13/14 (2006.01)
F21V 29/15 (2015.01)
F21S 10/02 (2006.01)
F21V 13/10 (2006.01)
F21V 5/00 (2018.01)
F21W 131/406 (2006.01)
- (52) **U.S. Cl.**
CPC **F21V 7/0066** (2013.01); **F21S 10/007** (2013.01); **F21S 10/026** (2013.01); **F21V 5/048** (2013.01); **F21V 9/40** (2018.02); **F21V 13/14** (2013.01); **F21V 29/15** (2015.01); **F21V 5/008** (2013.01); **F21W 2131/406** (2013.01)

- (58) **Field of Classification Search**
CPC . F21V 9/10; F21V 29/15; F21V 5/048; F21V 7/0066; F21V 13/14; F21S 10/007; F21S 10/026

See application file for complete search history.


- (56) **References Cited**
U.S. PATENT DOCUMENTS
6,645,231 B1 * 11/2003 Caldironi A61N 5/0616 606/2
2013/0107166 A1 * 5/2013 Osaka G02F 1/133308 349/61
2014/0118991 A1 * 5/2014 Lin G02B 26/008 362/84

- FOREIGN PATENT DOCUMENTS
CN 1263589 8/2000
CN 102588764 7/2012
EP 0248974 12/1987
EP 2028517 2/2009
EP 2 722 581 4/2014
GB 2 316 477 2/1998
(Continued)

- Primary Examiner* — Anh Mai
Assistant Examiner — Nathaniel Lee
(74) *Attorney, Agent, or Firm* — Leason Ellis LLP

- (57) **ABSTRACT**
Stage light fixture provided with:
a short arc lamp adapted to emit a light beam along an optical axis;
a reflector associated to the short arc lamp so as to concentrate light beam rays substantially at a work point;
an output optical assembly, arranged at the most downstream point along the optical axis, having a focal point arranged between the light source and the output optical assembly and coinciding with the work point;
at least one color assembly comprising a plurality of color devices configured to selectively color the light beam; the color assembly being arranged between the short arc lamp and the work point (PL).

18 Claims, 8 Drawing Sheets

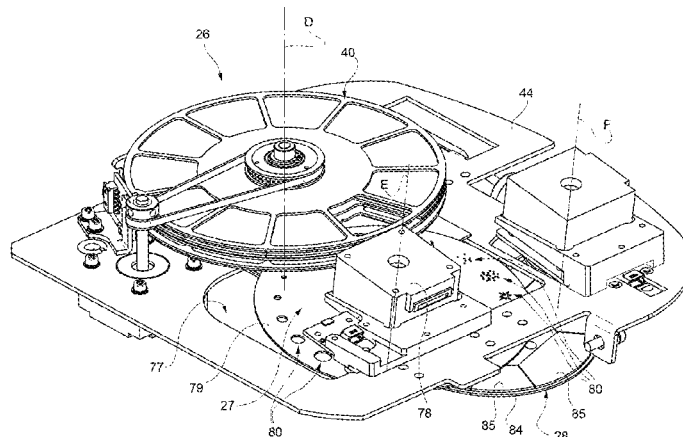

(56)

References Cited

FOREIGN PATENT DOCUMENTS

GB	2316477 A *	2/1998	F21S 10/007
GB	2 483 554	3/2012		
GB	2483554 A *	3/2012	F21S 10/007
WO	WO 2007/122459	11/2007		
WO	WO 2007122459 A2 *	11/2007	F21V 5/008

* cited by examiner

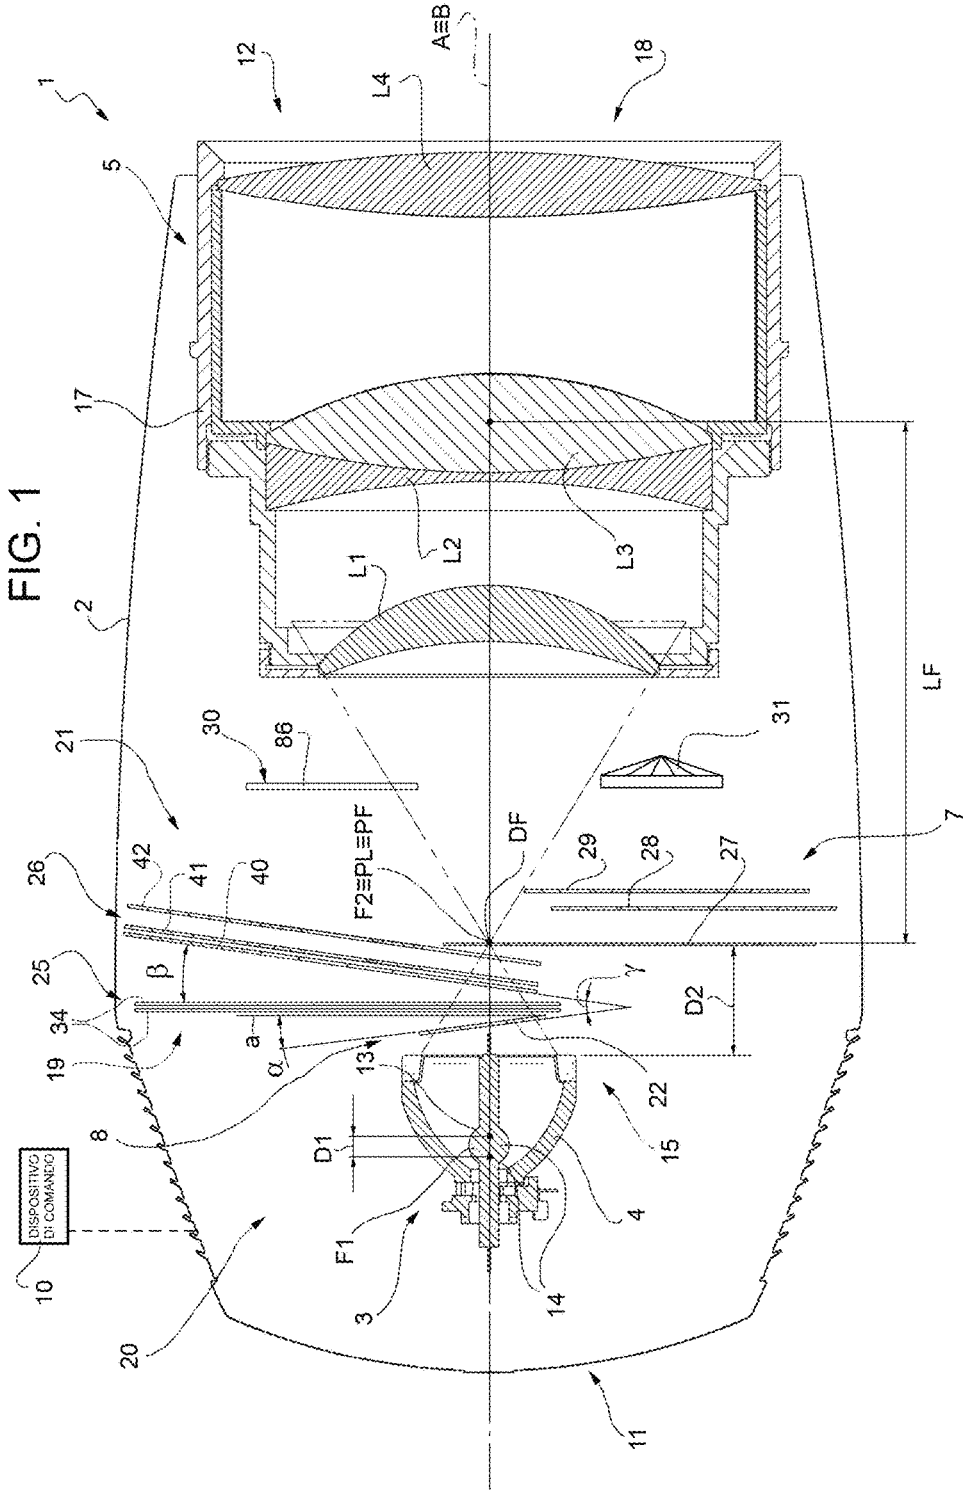
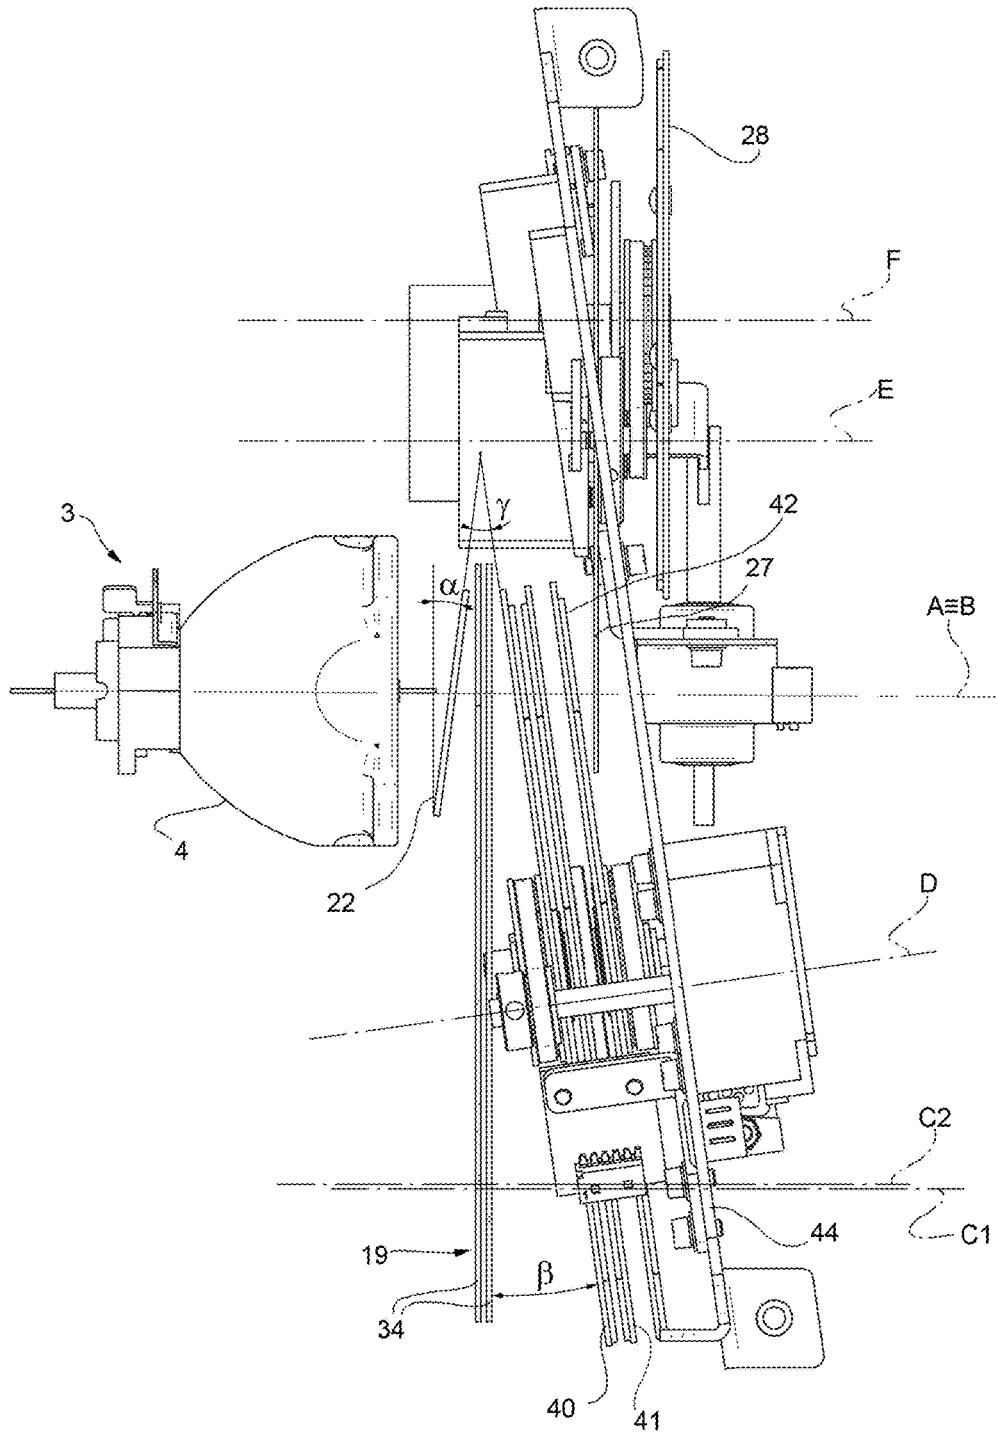


FIG. 2



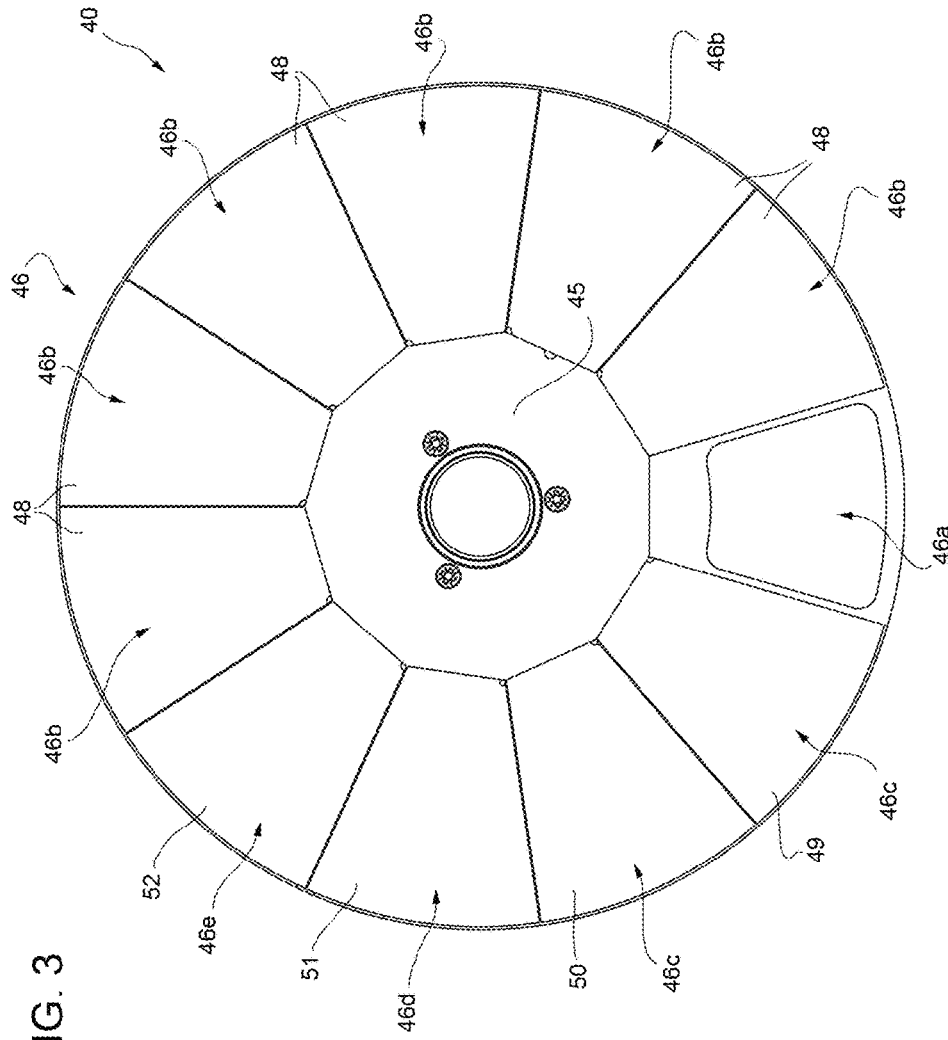


FIG. 3

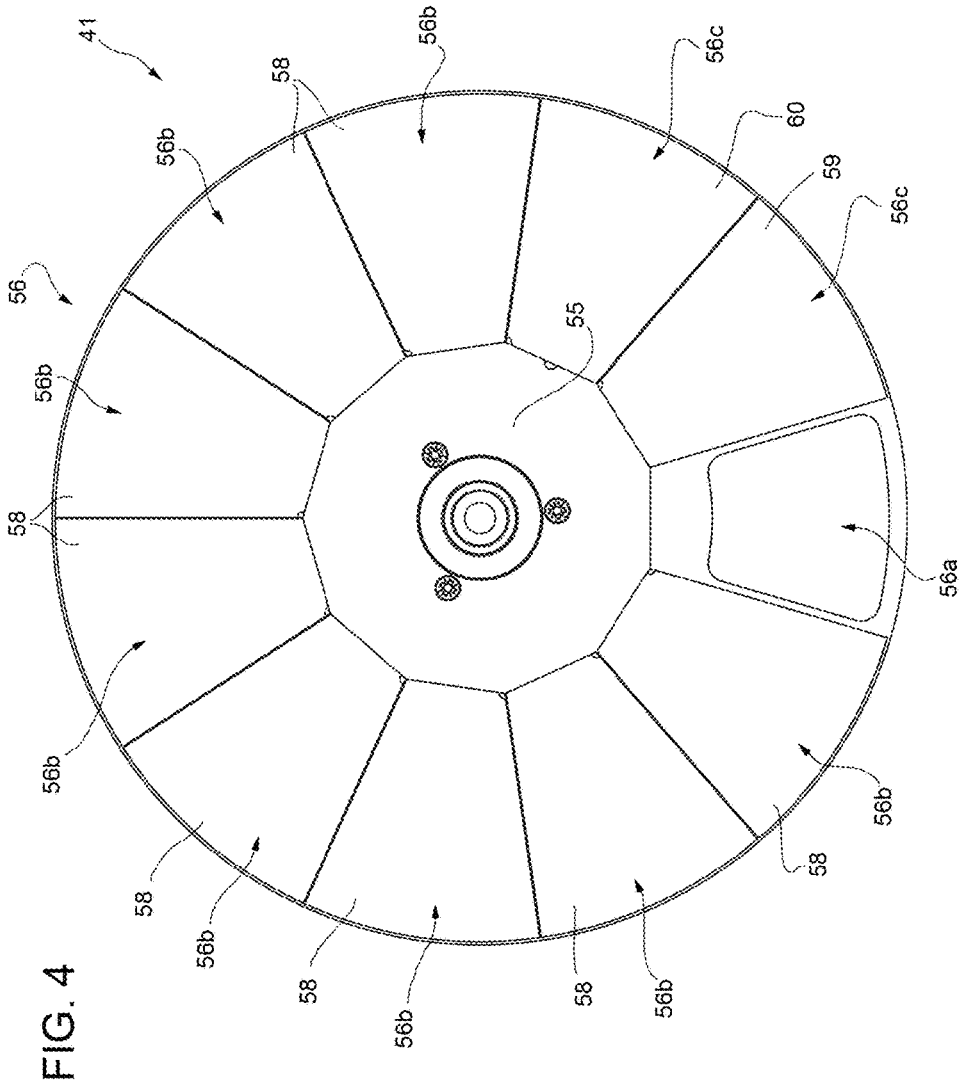


FIG. 4

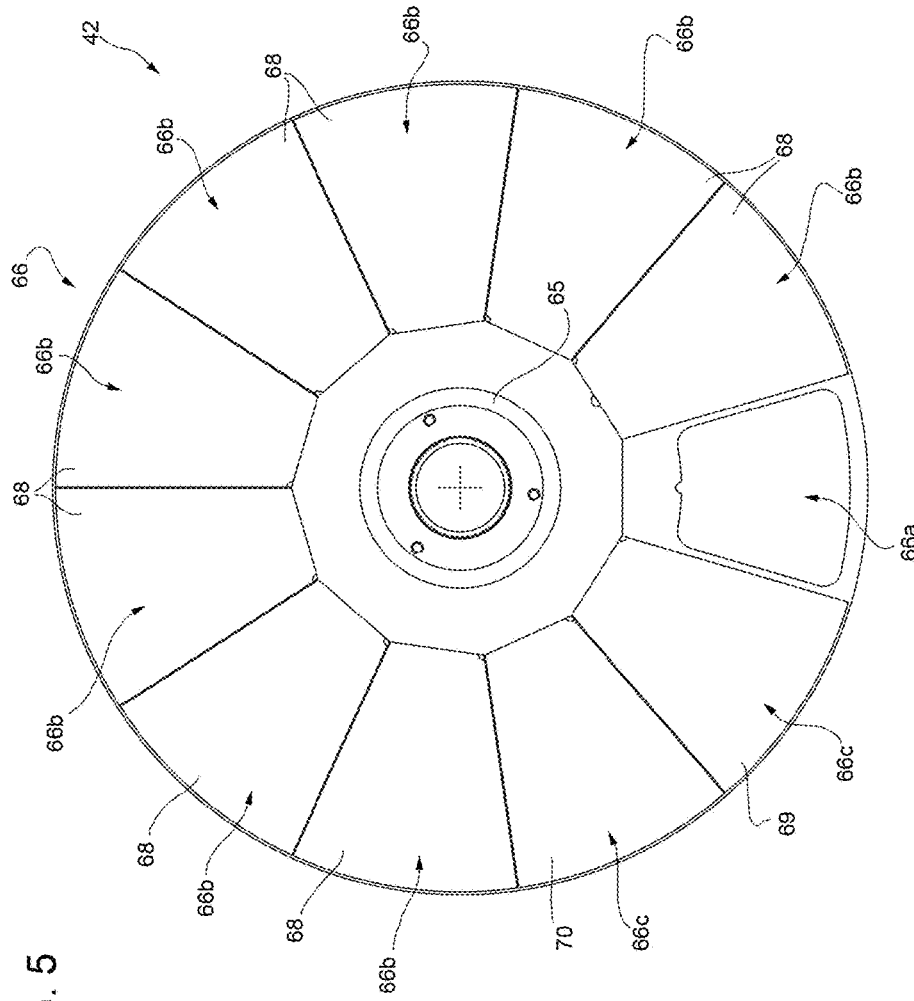
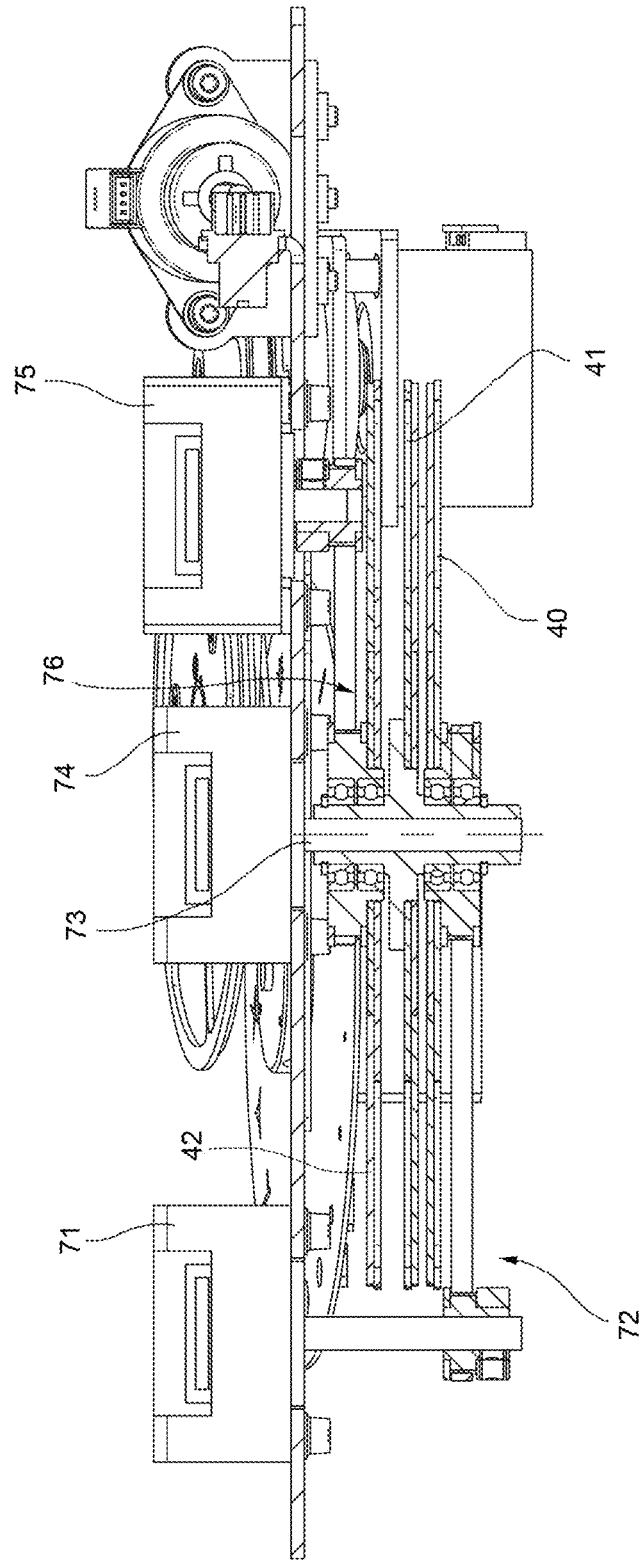


FIG. 5

FIG. 6




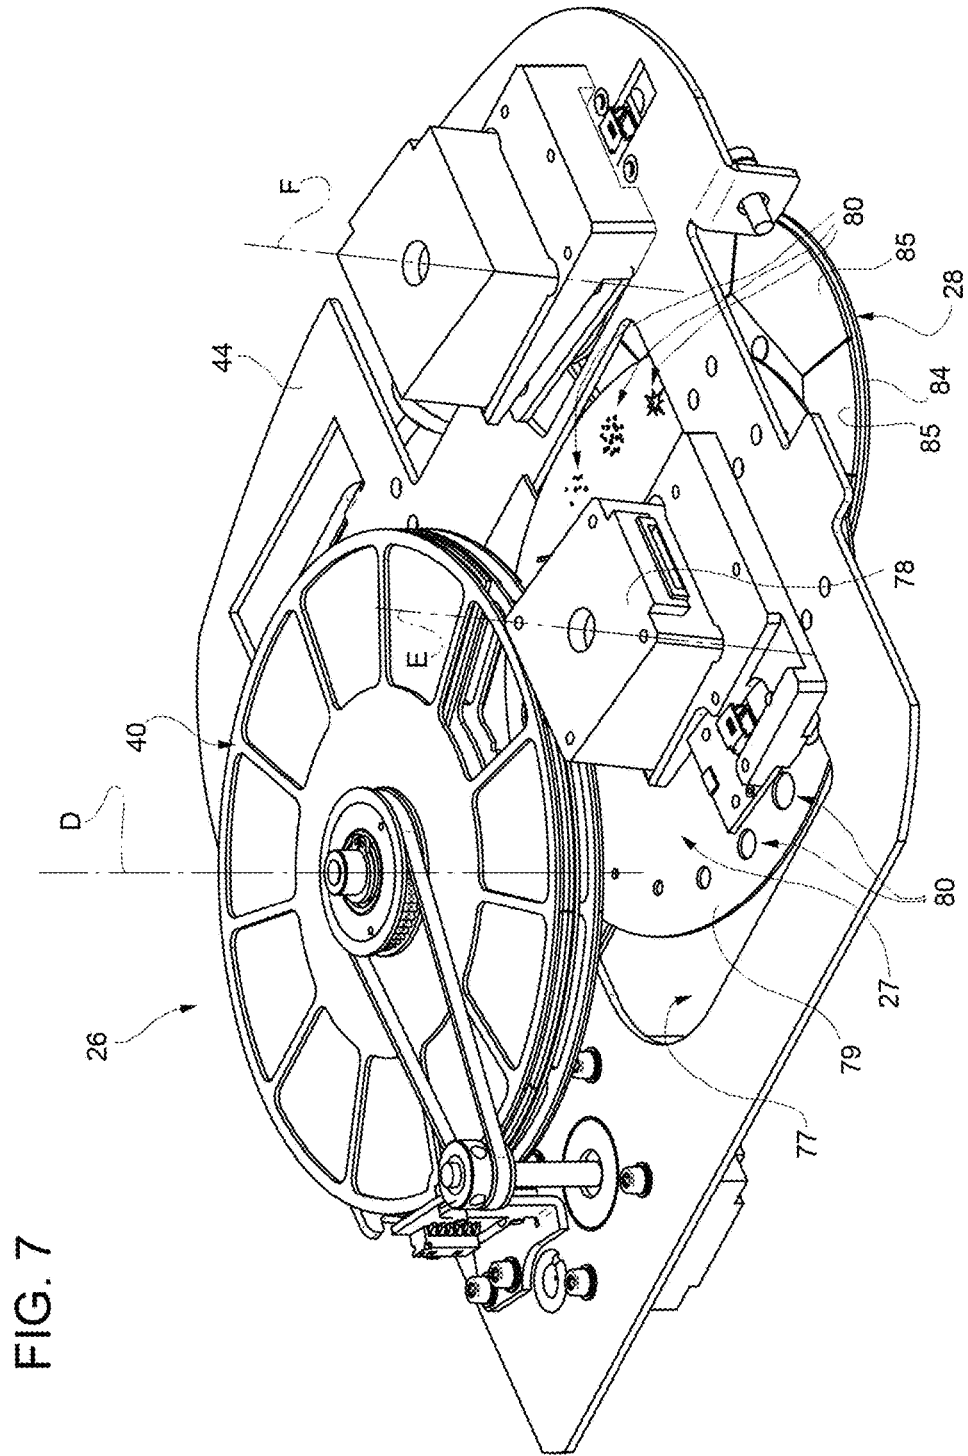


FIG. 7

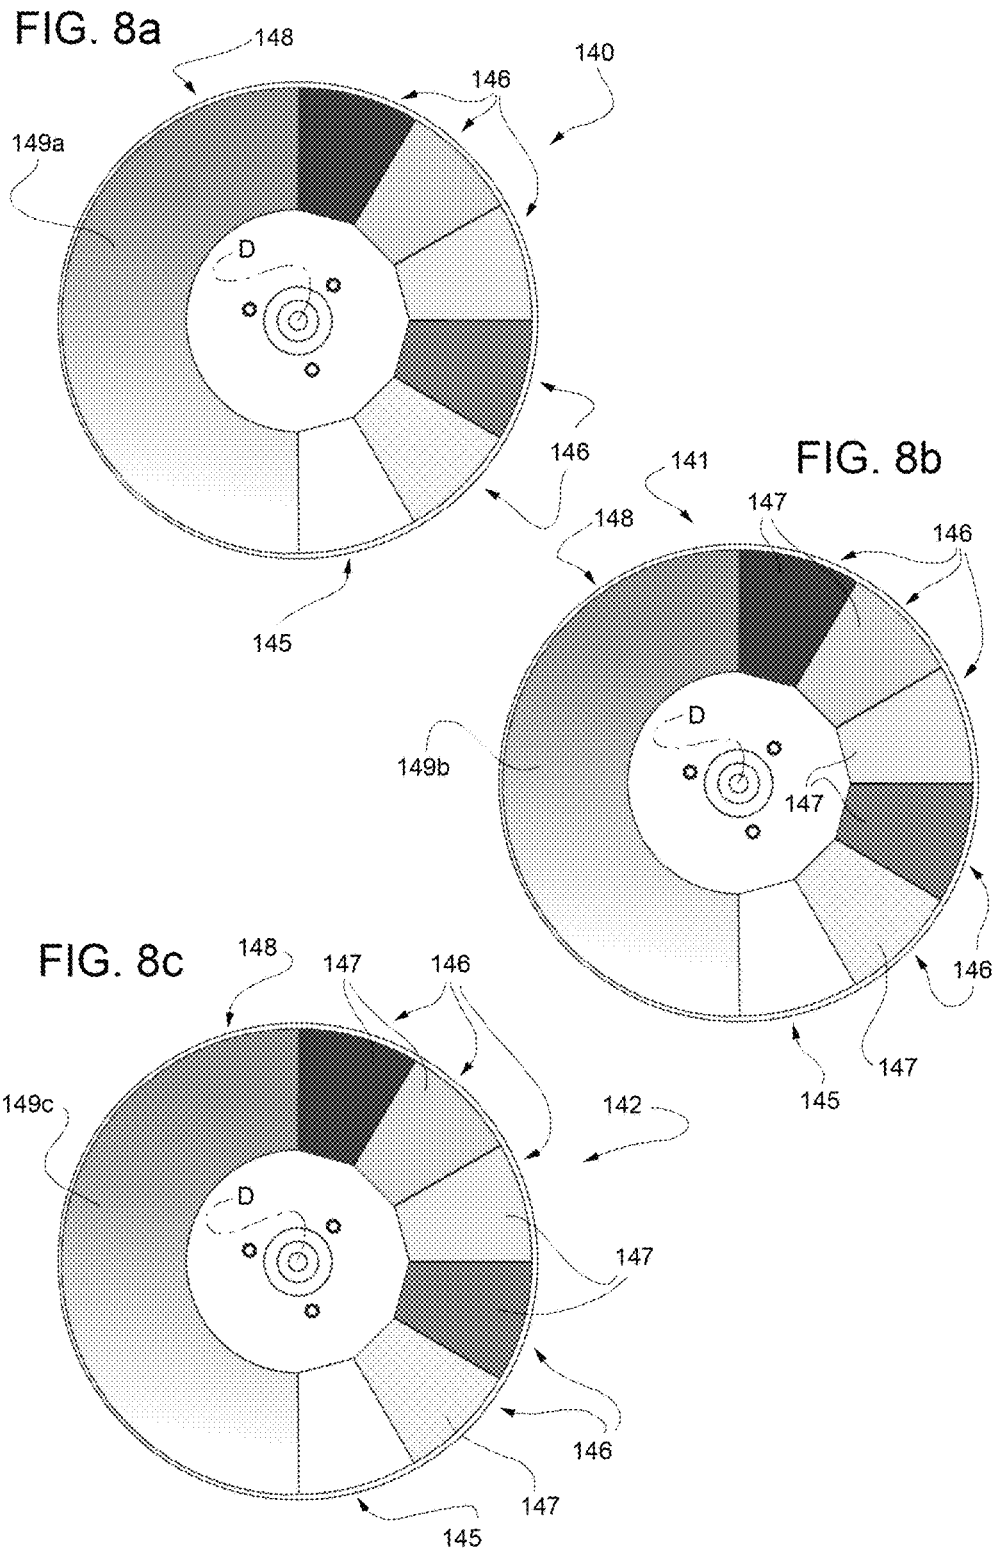

1

STAGE LIGHT FIXTURE**CROSS-REFERENCE TO RELATED APPLICATION**

The present claims priority under 35 U.S.C. 119 to Italian Patent Application No. MI2014A000388, filed Mar. 12, 2014, which is hereby incorporated by reference in its entirety.

The present invention relates to a stage light fixture.

BACKGROUND OF THE INVENTION

In recent years, in the field of stage light fixtures, the need to reduce the space taken up and the masses of light fixtures themselves has arisen, so as to make it easier and faster for operators to move such light fixtures in a controlled manner.

As a consequence, the space available to house the components of stage light fixtures has been reduced to a minimum.

In particular, in stage light fixtures of the type described by the applicant in patent application MI2010A001614, the available spaces are particularly small. These stage light fixtures are characterized by a short arc lamp coupled to a reflector able to concentrate a light beam at a work point coinciding with the focal point of the output optical assembly of the stage light fixture.

This structure allows operators to obtain a light beam that is compact, narrow, aligned, well-defined and has a very high concentration, so as to define a "light bar". However, in these stage light fixtures, the available spaces, due to the close relationship among the light source, the focus and the optical group, are very small and there are numerous technical difficulties in providing a stage light fixture that, besides creating the so-called "light bar", also allows operators to obtain a wide range of effects aimed at characterizing the light bar.

SUMMARY OF THE INVENTION

Therefore, the object of the present invention is to provide a stage light fixture of the type described above, which is able to generate a high-efficiency light beam and to process the light beam so as to obtain desired stage effects.

In accordance with this object, the present invention relates to a stage light fixture comprising:

- a short arc lamp adapted to emit a light beam along an optical axis;
- a reflector associated to the short arc lamp so as to concentrate light beam rays substantially at a work point;
- an output optical assembly, arranged at the most downstream point along the optical axis, having a focal point arranged between the light source and the output optical assembly and coinciding with the work point;
- at least one color assembly comprising a plurality of color devices configured to selectively color the light beam; the color assembly being arranged between the short arc lamp and the work point.

Thanks to the presence of at least two color devices arranged between the short arc lamp and the work point and thanks to the combination of the two color devices properly arranged in the area of the optical axis, one can obtain a plurality of stage effects.

The positioning of the color devices between the short arc lamp and the work point is particularly advantageous, since the light beam generated by the stage light fixture has no

2

defects. As a matter of fact, the positioning of the color devices downstream of the work point determines a worsening of the quality features of the light beam and, furthermore, reduces the space available to house further elements able to generate stage effects. Basically, thanks to the arrangement of the color assembly described above, one can obtain a stage light fixture that is able to generate a high-efficiency and high-quality light beam and, at the same time, to process the light beam so as to obtain the desired stage effects.

According to a preferred embodiment of the present invention, each color device comprises a disc. In this way, the color devices can be placed, moved and manufactured in an easier fashion.

According to a preferred embodiment of the present invention, the color devices are parallel to one another. In this way, the color devices can be moved in an easier fashion and, furthermore, the space take up by the color assembly is minimized.

According to a preferred embodiment of the present invention, at least one color device is transversal to the optical axis so as to form an angle with a plane perpendicular to the optical axis. In this way, the hot rays reflected by the color devices hit the heat-shield filter at a given angle, said heat-shield filter being preferably inclined so as to reflect said hot rays outwards and avoid the overheating of the short arc lamp.

Furthermore, the inclination of the color devices permits an optimization of the spaces between the short arc lamp and the work point, thus also enabling the insertion of further color devices.

According to a preferred embodiment of the present invention, the color devices are rotatable about a same rotational axis. In this way, the color devices can be moved without the need for large free spaces for the handling thereof and, furthermore, one can obtain multiple optical effects.

According to a preferred embodiment of the present invention, the color devices are independently moved. In this way, one can adjust the relative position between one color device and another, so as to obtain further optical effects on the light beam.

According to a preferred embodiment of the present invention, the rotational axis is inclined with respect to the optical axis of an angle, preferably comprised between 6° and 10°, for example 8°.

In this way, the color devices are arranged in such a way that the hot rays reflected by the color device hit the heat-shield filter at a given angle, said heat-shield filter being preferably inclined so as to reflect said hot rays outwards and avoid the overheating of the short arc lamp. Furthermore, the inclination of the color devices permits an optimization of the spaces between the short arc lamp and the work point, thus also enabling the insertion of further color devices.

According to a preferred embodiment of the present invention, the color assembly is arranged so that, in use, at least one portion of each color device of the plurality of color devices intersects the optical axis. In this way, all the color devices take part in the processing of the light beam.

According to a preferred embodiment of the present invention, each color device of the plurality of color devices comprises at least one first filter and at least one second filter; the first filter being a color filter configured to transmit light radiation having wavelengths comprised in at least one first respective band.

In this way, a single color device integrates at least one first color filter and one second filter, for example of a

different kind. In this way, in each color device many effects are integrated (at least one color effect and at least one other effect). As the light fixture comprises more than one color device, different filters can be aligned along the optical axis in order to obtain a plurality of combination of filters superimposition in order to obtain new and surprising light and color effects on the stage.

Advantageously, the presence of a single color device integrating at least one first color filter and one second filter avoids the use of a further beam processing element arranged on the outside of the color assembly and, therefore, enables an optimization of the available spaces.

According to a preferred embodiment of the present invention, the first filter is configured to create a progressive change of color in the beam passing through it during the rotation of the respective color device.

In this way, one can obtain a fading effect on the light beam by passing from a lighter color shade to a darker color shade and vice versa; this is done by simply moving the respective color device. Moreover, the presence of a fading effect integrated in the color device avoids the use of the usually adopted further fading processing element arranged on the outside of the color assembly. In this way the optimization of the available spaces of the stage light fixture is noticeably improved.

According to a preferred embodiment of the present invention, the first filter is at least a portion of an annular filter. In the prior art solutions, the fading effect is obtained by an entire annular filter. Thanks to this preferred embodiment, the fading effect is obtained by a portion of an annular filter. This solution leaves space available for other first or second filters.

According to a preferred embodiment of the present invention, the color device comprises a plurality of first filters arranged in succession along an annular path and configured to transmit respective light radiations so as to create a progressive change of color in the beam passing through them during the rotation of the respective color device. In this way the fading effect is obtained by a plurality of first filters instead of a single first filter.

According to a preferred embodiment of the present invention, the second filter is a hot filter, configured to reduce the color temperature of the passing-through light beam. The presence of a hot filter in at least one color device gives users the possibility to combine the effect of any filter of the color devices with at least one hot filter, so as to obtain a particular coloring that, up to now, could not be obtained with stage light fixtures of this type. Advantageously, the presence of a hot filter avoids the need of a further beam processing element arranged outside the color assembly and, therefore, enables an optimization of the available spaces.

According to a preferred embodiment of the present invention, the second filter is a cold filter configured to increase the color temperature of the passing-through light beam. In this way, one can combine the effect of any filter of the color devices with at least one cold filter so as to obtain further optical effects.

According to a preferred embodiment of the invention the second filter is a diffusing filter, configured to diffuse the passing-through light beam. In this way, the diffusing filter helps decrease the intensity of the light beams lowering its temperature and reducing the risk of inflammability for objects lit by the light fixture. This risk is particularly high when the lit object is arranged at a distance that is smaller than 18 m.

According to a preferred embodiment of the present invention, the second filter is one Wood filter.

According to a preferred embodiment of the invention the second filter is a color filter configured to color the passing-through light beam.

As a matter of fact, the hot light filter, the cold light filter, the wood filter, the diffusing element are usually carried out by further respective processing elements arranged outside the color assembly and adjusted in an autonomous manner (for example gelatines arranged on the outside of the stage light fixture, or devices that are especially dedicated to the modification of color temperature, etc.).

The integration of all these effects in the color assembly has the advantage of reducing the space taken up and the masses of light fixtures themselves and at the same time obtaining a plurality of lighting effects.

According to a preferred embodiment of the present invention, the stage light fixture comprises a heat-shield filter that is transversal to the optical axis so as to form an angle with a plane perpendicular to the optical axis. In this way, the hot rays reflected by the light beam processing elements arranged downstream of the heat-shield filter are bounced back by the heat-shield filter and led towards the casing of the light fixture, whereas the hot rays generated by the light source are reflected on the inner surface of the reflector, which is properly treated.

According to a preferred embodiment of the present invention, the heat-shield filter is arranged along a plane which intersects the plane comprising at least one color device of the plurality of color devices, so as to form an angle, preferably comprised between 12° e 20° , preferably 16° .

In this way, the rays reflected by the color devices are bounced back by the heat-shield filter and led towards the casing, thus avoiding the overheating of the light source.

According to a preferred embodiment of the present invention, the stage light fixture comprises at least one gobos device arranged at the work point. In this way, the gobos device exploits the maximum concentration of the light beam.

BRIEF DESCRIPTION OF THE DRAWINGS

Further features and advantages of the invention will be best understood upon perusal of the following description of a non-limiting embodiment thereof, with reference to the accompanying drawing, wherein:

FIG. 1 is a schematic view from above, with cross-sectional parts and parts removed for greater clarity, of a stage light fixture according to the present invention;

FIG. 2 is a cross-sectional view from the bottom, with parts removed for greater clarity, of a first detail of the stage light fixture of FIG. 1;

FIG. 3 is a front view, with parts removed for greater clarity, of a second detail of the stage light fixture of FIG. 1;

FIG. 4 is a front view, with parts removed for greater clarity, of a third detail of the stage light fixture of FIG. 1;

FIG. 5 is a front view, with parts removed for greater clarity, of a fourth detail of the stage light fixture of FIG. 1;

FIG. 6 is a cross-sectional view from above, with parts removed for greater clarity, of a fifth detail of the stage light fixture of FIG. 1;

FIG. 7 is a perspective view, with parts removed for greater clarity, of a sixth detail of the stage light fixture of FIG. 1;

FIGS. 8a, 8b and 8c are front views, with parts removed for greater clarity, of details of the stage light fixture according to a further embodiment.

DETAILED DESCRIPTION OF THE
INVENTION

FIG. 1 shows, with reference number 1, a stage light fixture comprising a casing 2, a light source 3, a reflector 4, an optical assembly 5, a light beam processing device 7 (schematically shown in FIG. 1), a heat-shield assembly 8 (schematically shown in FIG. 1), and a control device 10.

The casing 2 extends along a longitudinal axis A and has a closed end 11 and an open end 12, which is opposite to the closed end 11 along the axis A. Preferably, the casing 2 is supported by support means (not shown in the accompanying figures for greater clarity). In particular, the support means and the casing 2 are configured to allow the casing 2 to rotate about two orthogonal axes, commonly known as PAN and TILT axes.

Preferably, the stage light fixture 1 comprises a skeleton (not shown in the accompanying figures for greater clarity), which is made up of elements that are coupled to one another and configured to define a support structure for the elements arranged on the inside of the casing 2, such as the light source 3, the reflector 4, the light beam processing device 7, and the heat-shield assembly 8.

The light source 3 is arranged on the inside of casing 2 in the area of the closed end 11 of the casing 2, is supported by the skeleton, and is adapted to emit a light beam substantially along an optical axis B.

In the non-limiting embodiment described and discussed herein, the optical axis B coincides with the longitudinal axis A of the casing 2.

The light source 3 is a short arc lamp.

In particular, the short arc lamp 3 comprises a bulb 13, which is generally made of glass or quartz and contains halides.

On the inside of the bulb 13 there are arranged two electrodes 14, which are connected to a power supply circuit (not shown in the accompanying figures) and are arranged at a distance D1 from one another.

The distance D1 between the electrodes 14 is approximately smaller than 2 mm. In the non-limiting embodiment described and discussed herein, the distance D1 is approximately 1.3 mm.

In the non-limiting embodiment described and discussed herein, the short arc lamp 3 has a power that is approximately greater than 450 Watts, preferably greater than 480 Watts.

The reflector preferably is an elliptical reflector, is coupled to the light source 3, and is provided with an outer edge 15.

In particular, the reflector 4 is coupled to the light source 3 so as to concentrate light beam rays substantially at a work point PL that is arranged at a distance D2 from the outer edge 15 of the reflector 4.

In particular, as the reflector 4 is elliptical, it is provided with two focuses F1 and F2. Preferably, the light source 3 is arranged in a first focus F1 of the elliptical reflector 4, so that the rays emitted by the light source are reflected and concentrated at the second focus F2 of the reflector 4. The second focus F2 defines the work point PL, which is arranged at the distance D2 from the outer edge 15 of the reflector 4.

In the non-limiting embodiment described and discussed herein, the distance D2 is approximately equal to 36 mm.

The light beam reflected by the reflector 4 and concentrated at the work point PL is substantially punctiform and has a diameter DF that can reach, at the most, 1 mm.

Preferably, in the work point PL the light beam has a diameter DF measuring 0.8 mm.

Basically, the rays of the light beam generate, in the work point PL, a highly concentrated and substantially punctiform light beam.

The optical assembly 5 is arranged in the area of the open end 12 of the casing 2, so as to be centred on the optical axis B and close the casing 2.

The optical assembly 5 in an output optical assembly, arranged at the most downstream point along the optical axis B, so as to be the last assembly adapted to process the light beam intercepted.

The optical assembly 5 has a focal point PF arranged between the light source 3 and the optical assembly 5.

Preferably, the focal point PF coincides with the work point PL. In this way, the optical assembly 5 can capture and focus the light beam concentrated at the work point PL. Therefore, the light beam coming out of the optical assembly 5 will be very intense and concentrated.

The optical assembly 5 is characterized by a focal length LF, which is able to substantially reduce to zero the DF/LF ratio. Wherein DF is the diameter of the light beam concentrated and reflected at the focal point PF and LF is the focal length (also called focal distance or, more simply, focal) of the optical assembly 5 and is defined by the distance in mm between the centre of the optical assembly 5 (also known as nodal point) and the focal point PF of the optical assembly.

In this way, the output angle of the light beam emitted by the stage light fixture 1 will have radii that are substantially parallel or, at the most, have a minimum deflection angle.

For example, in the non-limiting embodiment described and discussed herein, in which the diameter of the lenses of the optical assembly 5 is equal to 170 mm, the focal length LF measures 170 mm and the diameter of the light beam concentrated and reflected at the focal point PF is 0.8 mm, we have a beam deflection angle, at a projection distance of 100 meters, that is approximately equal to 0.2°.

The optical assembly 5 has a positive refractive power and is mobile along the optical axis B so as to adjust the focusing of the projected image.

Preferably, the optical assembly 5 is mobile along the optical axis B between a first operating position and a second operating position.

In the non-limiting embodiment described and discussed herein, the optical assembly 5 comprises a support frame 17 and a plurality of lenses 18, which are supported by the support frame 17.

According to a variant of the present invention, the optical assembly comprises one single lens supported by a respective frame.

Preferably, the support frame 17 is coupled to a carriage (not shown for greater clarity), which is mobile along the optical axis B and whose movement is adjusted by an autofocus device (known and not shown).

In the non-limiting embodiment described and discussed herein, the optical assembly 5 preferably comprises a convex-concave lens L1, a biconcave lens L2, a biconvex lens L3 and a biconvex lens L4. Lenses L1 and L2 are spaced apart from one another. Lenses L2 and L3 are coupled to one another, whereas lens L4 is spaced apart from lens L3.

The heat-shield assembly 8 is substantially configured so as to generate a thermal barrier between an area 20, in which the light source 3 is housed, and an area 21, in which the light beam processing device 7 are housed.

The heat-shield assembly **8** comprises a heat-shield filter **22** and a frame (not shown in the accompanying drawings), which is coupled to the skeleton and is configured to support the heat-shield filter **22**.

The heat-shield filter **22** is configured to filter hot radiations (radiations that cause a temperature increase of the body hit by them) in the range of non-visible radiations coming from the area **20** where the light source **3** is arranged. In this way, the hot radiations in the range of non-visible radiations generated by the light source **3** and by the reflector **4** are prevented from hitting the light beam processing device **7**.

Preferably, the heat-shield filter **22** is transversal to the optical axis B. In the non-limiting embodiment described and discussed herein, the heat-shield filter **22** forms an angle α with a plane a perpendicular to the optical axis B. The angle α is a dihedral angle preferably comprised between 6° and 10° . In the non-limiting embodiment described and discussed herein, the angle α measures 8° . In other words, the heat-shield filter **22** is inclined at an angle of 82° relative to the optical axis B.

In this way, the hot rays reflected by the light beam processing elements **7** arranged downstream of the heat-shield filter **22** are bounced back by the heat-shield filter **22** and led towards the casing **2** of the light fixture **1**, whereas the hot rays generated by the light source **3** are reflected on the inner surface of the reflector **4**, which is properly treated in order to increase heat dispersion. The heat generated by the hot rays led towards the casing **2** is dispersed by a ventilation system that is not shown herein.

Therefore, the inclination of the heat-shield filter **22** avoids the overheating of the light source **3**.

The light beam processing device **7** are supported by the skeleton and are configured to process the light beam generated by the light source **3**, so as to obtain special effects.

In particular, the light beam processing device **7** comprise, preferably in sequence, at least one dimmer **25**, a color assembly **26**, a first gobos device **27**, a rainbow device **28**, a second gobos device **29**, a frost assembly **30**, and a prismatic element **31**.

Obviously, the light beam processing device **7** can comprise further light beam processing devices that are not explicitly described herein.

Preferably, the first gobos device **27** is arranged in the area of the work point PL, whereas the rainbow device **28**, the second gobos device **29**, the frost assembly **30** and the prismatic element **31** are arranged between the work point PL and the optical assembly **5**.

With reference to FIG. **2**, the dimmer **19** comprises two mobile plates **34**, which are arranged along two planes that are substantially orthogonal to the optical axis B. The plates **34** are opaque to visible radiations. When they intercept the light beam, the plates **34** determine a reduction of the luminosity of the light beam.

In particular, the plates **34** are respectively provided with an end that is hinged to a support plate (not visible in FIG. **2**) and can rotate around a respective axis C1, C2.

Preferably, the plates **34** are moved independently of one another by a respective motor (not visible in the accompanying drawings).

The rotation axes C1, C2 are substantially parallel to the optical axis B, but they do not coincide with the optical axis B.

The color assembly **26** comprises at least one first color device **40**, which is preferably transversal to the optical axis B so as to form an angle β with a plane b perpendicular to

the optical axis B. The angle β is a dihedral angle preferably comprised between 6° and 10° . In the non-limiting embodiment described and discussed herein, the angle β measures 8° . In other words, the color device **40** is inclined at an angle of 82° relative to the optical axis B. In the non-limiting embodiment described and discussed herein, the color assembly **26** also comprises a second color device **41** and a third color device **42**. The first color device **40**, the second color device **41** and the third color device **42** are defined by discs that are parallel to one another.

The first color device **40**, the second color device **41** and the third color device **42** are rotatable about a same rotational axis D, which is not parallel to the optical axis B and coincides neither with the optical axis B nor with the rotational axis C of the dimmer **19**.

In particular, the rotational axis D is inclined with respect to the optical axis B by approximately 8° .

According to a further embodiment not illustrated, the color devices **40**, **41**, **42** are arranged orthogonal to the optical axis.

The first color device **40**, the second color device **41** and the third color device **42** are arranged in succession along the rotational axis D and are moved independently of one another. The adjustment of the relative position among the first color device **40**, the second color device **41** and the third color device **42** is carried out by the control device **10** (FIG. **1**).

The first color device **40**, the second color device **41** and the third color device **42** are supported by a support plate **44**, as described more in detail below, so that at least a portion of the first color device **40**, a portion of the second color device **41** and a portion of the third color device **42** always intercept the light beam emitted by the light source **3**. In other words, the first color device **40**, the second color device **41** and the third color device **42** are arranged so as to at least partially intersect the optical axis B.

With reference to FIG. **3**, the first color device **40**, arranged close to the light source **3**, is defined by a plate **45**, preferably made of metal, which is provided with a plurality of trapezoidal sectors **46**, which are substantially arranged one beside the other along a peripheral ring of the plate **45**. In the non-limiting embodiment described and discussed herein, the trapezoidal sectors **46** of the first color device **40** are eleven.

The trapezoidal sectors **46**, except one, are coupled to respective light beam processing elements, preferably filters.

In detail, the first color device **40** is supported by the support plate **44** so that the trapezoidal sectors **46** intercept the light beam and intersect the optical axis B during the rotation about the rotational axis D of the first color device **40**.

In this way, the light beam emitted by the light source **3** passes through a respective trapezoidal sector **46** and is selectively processed in accordance with the properties of the light beam processing elements coupled to the trapezoidal sector **46** intersecting the light beam itself.

In the non-limiting embodiment described and discussed herein, the plurality of trapezoidal sectors **46** comprise: a trapezoidal sector **46a**, which is not associated with any filter and does not determine any variation of the light beam passing through it; a plurality of trapezoidal sectors **46b**, which are arranged in a consecutive fashion and are coupled to respective cyan color filters **48**; two trapezoidal sectors **46c**, which are coupled to a diffusing filter **49** and to a first hot filter **50**, respectively; a trapezoidal sector **46d**, which is coupled to a respective first cold filter **51**; and, finally, a trapezoidal sector **46e**, which is coupled to a Wood filter **52**.

In the non-limiting embodiment described and discussed herein, the cyan color filters **48** are six and they are made of a material comprising a glass substrate, on which a succession of dielectric material layers are deposited.

Each cyan color filter **48** is configured to transmit light radiations having wavelengths comprised in one respective transmission band. The transmission band is defined by a lower cut-off wavelength and by an upper cut-off wavelength. The upper cut-off wavelength of the cyan color filters **48** ranges from 515 to 585 nm.

The transmission bands of consecutive cyan color filters **48** have an increasing upper cut-off wavelength. In this way, the consecutive cyan color filters **48** are configured to transmit light radiations so as to create a progression of a color.

Thanks to this feature, during the rotation of the first color device **40** about its own rotational axis D, one can gradually change the coloring of the projected light beam from a lighter cyan to a darker cyan or vice versa according to the direction of rotation of the first color device **40**.

The first hot filter **50** is configured to reduce the color temperature of the light beam passing through it. For example, the hot filter **50** is configured to transmit wavelengths that simulate the effect that would be obtained with a filament lamp.

The diffusing filter **49** is configured to diffuse the light beam passing through it, in order to reduce the intensity of the light beam coming out of the stage light fixture **1**.

The cold filter **51** is configured to increase the color temperature of the light beam passing through it.

The Wood filter **52** is configured to transmit light radiations between 320 and 400 nm with a peak at 365 nm and is opaque to all visible light except for red and violet.

With reference to FIG. 4, the second color device **41** is arranged between the first color device **40** and the third color device **42** and is defined by a plate **55**, preferably made of metal, which is provided with a plurality of trapezoidal sectors **56**, which are substantially arranged one beside the other along a peripheral ring of the plate **55**. In the non-limiting embodiment described and discussed herein, the trapezoidal sectors **56** of the second color device **41** are eleven.

The trapezoidal sectors **56**, except one, are coupled to respective light beam processing elements.

In detail, the second color device **41** is supported by the support plate **44** so that the trapezoidal sectors **56** intercept the light beam and intersect the optical axis B during the rotation about the rotational axis D of the second color device **41**.

In this way, the light beam emitted by the light source **3** passes through a respective trapezoidal sector **56** and is selectively processed in accordance with the properties of the light beam processing elements coupled to the trapezoidal sector **56** intersecting the light beam itself.

In the non-limiting embodiment described and discussed herein, the plurality of trapezoidal sectors **56** comprise: a trapezoidal sector **56a**, which is not associated with any filter and does not determine any variation of the light beam passing through it; a plurality of trapezoidal sectors **56b**, which are arranged in a consecutive manner and are coupled to respective magenta color filters **58**; and two trapezoidal sectors **56c**, which are coupled to a first hot filter **59** and to a second hot filter **60**, respectively.

In the non-limiting embodiment described and discussed herein, the magenta color filters **58** are eight and they are made of a material comprising a glass substrate, on which a succession of dielectric material layers are deposited.

Each magenta color filter **58** is configured to transmit light radiations having wavelengths comprised in two transmission bands. The first transmission band is defined by a first lower cut-off wavelength and by a first upper cut-off wavelength, whereas the second transmission band is defined by a second lower cut-off wavelength and by a second upper cut-off wavelength. The first upper cut-off wavelength of the magenta color filters **58** ranges from 445 to 468 nm, the second lower cut-off wavelength ranges from 540 to 645 nm.

The first transmission bands of consecutive magenta color filters **58** have an increasing first upper cut-off wavelength, whereas the second transmission bands of consecutive magenta color filters **58** have an increasing second lower cut-off wavelength.

In this way, the consecutive magenta color filters **58** are configured to transmit light radiations so as to create a progression of a color.

Thanks to this feature, during the rotation of the second color device **41** about its own rotational axis D, one can gradually change the coloring of the projected light beam from a lighter magenta to a darker magenta or vice versa according to the direction of rotation of the second color device **41**.

The first hot filter **59** is configured to reduce the color temperature of the light beam passing through it.

The second hot filter **60** is configured to reduce the color temperature of the light beam passing through it.

With reference to FIG. 5, the third color device **42** is arranged downstream of the second color device **41** close to the first gobos device **27** and is defined by a plate **65**, preferably made of metal, which is provided with a plurality of trapezoidal sectors **66**, which are substantially arranged one beside the other along a peripheral ring of the plate **65**. In the non-limiting embodiment described and discussed herein, the trapezoidal sectors **66** of the third color device **42** are eleven.

The trapezoidal sectors **66**, except one, are coupled to respective light beam processing elements.

In detail, the third color device **42** is supported by the support plate **44** so that the trapezoidal sectors **66** intercept the light beam and intersect the optical axis B during the rotation about the rotational axis D of the third color device **42**.

In this way, the light beam emitted by the light source **3** passes through a respective trapezoidal sector **66** and is selectively processed in accordance with the properties of the light beam processing elements coupled to the trapezoidal sector **66** intersecting the light beam itself.

In the non-limiting embodiment described and discussed herein, the plurality of trapezoidal sectors **66** comprise: a trapezoidal sector **66a**, which is not associated with any filter and does not determine any variation of the light beam passing through it; a plurality of trapezoidal sectors **66b**, which are arranged in a consecutive manner and are coupled to respective yellow color filters **68**; and two trapezoidal sectors **66c**, which are coupled to a first hot filter **69** and to a second hot filter **70**, respectively.

In the non-limiting embodiment described and discussed herein, the yellow color filters **68** are eight and they are made of a material comprising a glass substrate, on which a succession of dielectric material layers are deposited.

Each yellow color filter **68** is configured to transmit light radiations having wavelengths comprised in one respective transmission band. The transmission band is defined by a lower cut-off wavelength and by an upper cut-off wavelength. The lower cut-off wavelength of the yellow color filters **68** ranges from 490 to 620 nm.

The transmission bands of consecutive yellow color filters **68** have an increasing lower cut-off wavelength. In this way, the consecutive yellow color filters **68** are configured to transmit light radiations so as to create a progression of a color.

Thanks to this feature, during the rotation of the third color device **42** about its own rotational axis D, one can gradually change the coloring of the projected light beam from a lighter yellow to a darker yellow or vice versa according to the direction of rotation of the third color device **42**.

The first hot filter **69** is configured to reduce the color temperature of the light beam passing through it.

The second hot filter **70** is configured to reduce the color temperature of the light beam passing through it.

With reference to FIG. 6, the first color device **40** is coupled to a respective motor **71** by a belt connection system **72**.

The second color device **41** is coupled to a shaft **73**, which is driven by a respective motor **74**.

The third color device **42** is coupled to a respective motor **75** by a belt connection system **76**.

The use of belt driving systems **72** and **76** ensures that the axial space taken up by the color assembly **26** is reduced.

In use, the controlled and independent rotation about the rotational axis D of the first color device **40**, of the second color device **41** and of the third color device **42** determines the coloring of the light beam. In this way, one can obtain numerous shades of color of the light beam.

The only case in which the color assembly **26** does not determine a variation of the coloring of the beam occurs when the first color device **40**, the second color device **41** and the third color device **42** are arranged in such a way that the beam intercepts the trapezoidal sectors **46a**, **56a** and **66a**.

This configuration is shown in FIG. 7.

FIG. 7 clearly shows the support plate **44**, which supports the color assembly **26**, the first gobos device **27** and the rainbow device **28**.

The support plate **44** is coupled to the skeleton of the casing **2** and is preferably fixed. The support plate **44** is provided with a main opening **77**, through which the optical axis B of the light beam passes. The main opening **77** is large enough not to determine modifications of the light beam generated by the light source **3**.

In particular, the first gobos device **27** is supported by the support plate **44** in such a way that the first gobos device **27** is substantially orthogonal to the optical axis B. The first gobos device **27** can rotate about a respective rotation axis E thanks to the coupling to a motor **78**. Preferably, the rotation of the first gobos device **27** is driven by the control device **10** (FIG. 1).

In detail, the first gobos device **27** is defined by a plate **79**, preferably made of metal or glass, on which there are obtained or drawn patterns or shapes **80**, which are adapted to generate a given light design when the first gobos device **27** intercepts the light beam. Preferably, the patterns and/or the shapes **80** are obtained along an annular peripheral edge of the metal plate **79**.

The rainbow device **28** is supported by the support plate **44** in such a way that the rainbow device **28** is substantially orthogonal to the optical axis B. The rainbow device **28** can rotate about a respective rotation axis F thanks to the coupling to a motor **82** by a respective belt driving system **83** (not clearly shown in the accompanying drawings). The rotational speed of the rainbow device **28** is capable of being modulated and it can be modulated also based on the moving speed of the casing **2**.

Preferably, the rotation of the rainbow device **28** is governed by the control device **10**.

In detail, the rainbow device **28** is defined by a plate **84**, which is coupled to a plurality of coloured filters **85**, which are arranged along an annular peripheral edge of the metal plate **84** (the filters are not completely visible in the accompanying drawings).

In the example, seven coloured filters **85** are provided, which are configured to color the light beam passing through them according to the sequence of the colors of the rainbow: red, orange, yellow, green, blue, indigo, and violet.

The rainbow device **28** can be moved so as to intercept the light beam only when needed. In particular, the rainbow device **28** is coupled to the support plate **44** by a moving mechanism (non shown in the accompanying drawings), which moves the rainbow device **28** from a position in which the device does not intercept the light beam to a position in which at least one coloured filter **85** intercepts the light beam.

When the rainbow device **28** is arranged so as to intercept the light beam and rotates, the projected beam is coloured. The rotational speed of the rainbow device **28** determines an optical effect such that the observer perceives different light beams in sequence with different colors.

According to a variant, which is not shown, fourteen coloured filters are provided, which comprise two sets of seven filters each, having the colors of the rainbow: red, orange, yellow, green, blue, indigo, and violet.

With reference to FIG. 1, the light beam processing device **7** comprise, as already mentioned above, a second gobos device **29**, a frost group **30** and a prismatic element **31**.

The second gobos device **29** is configured to shape the light beam passing through it. In particular, the second gobos device **29** comprises a plate, which is provided with a plurality of gobos elements (not shown in the accompanying drawings), each of them being able to rotate independently of one another.

The second gobos device **29** can be moved so as to intercept the light beam only when needed. As a matter of fact, the second gobos device **29** is provided with moving means (not shown in the accompanying drawings), which are able to selectively place at least one gobos element of the second gobos device **29** along the optical axis B.

The frost assembly **30** is configured to cause the incoming light beam to become diffused and comprises at least one optical element **86** that can be moved so as to intercept the light beam only when needed. As a matter of fact, the optical element **86** is provided with moving means (not shown in the accompanying drawings), which are able to selectively place the optical element **82** along the optical axis B. The optical element **86** is preferably defined by an acid-etched glass.

The prismatic element **31**, as well, is provided with moving means (not shown), which are able to selectively place the prismatic element **31** along the optical axis B to intercept the light beam.

In particular, the prismatic element **31** is shaped so as to have face that allows the light beam streaming out of the prismatic element **31** itself to be divided into different components. In particular, the prismatic element **31** is configured to multiply the light beam into a number of different light beams based on the number of faces that define the prismatic element **31**.

According to an embodiment not illustrated of the stage light fixture of the present invention, the rainbow device is replaced by a graphic/animation wheel, configured to rotate about an axis of rotation and to intercept the light beam during the rotation. In particular, the animation wheel com-

prises at least one graphically worked annular portion which intercepts the light beam during rotation and leads to a particular animated effect on the projected beam.

In FIGS. *8a*, *8b* and *8c* different embodiments of color devices **140**, **141**, and **142** are illustrated.

Color devices **140**, **141** and **142** are similar to the color devices **40**, **41** and **42** as they rotate about the same axis of rotation D and are rotated by similar moving means.

In other words, color devices **140**, **141** and **142** differ from color devices **40**, **41** and **42** essentially for the presence of a different combination of beam processing elements, preferably of a different combination of filters.

In particular each color devices **140**, **141** and **142** according to the new embodiment comprises one trapezoidal section **145** which is not associated with any filter and does not determine any variation of the light passing through it, a plurality of trapezoidal sections **146** coupled to respective filters **147** and at least one annulus portion **148** which is coupled to a respective portion of an annular filter **149**.

The trapezoidal sections **145** and **146** and the annulus portion are arranged along an annular peripheral path.

The filters **147** are similar to the ones described for the embodiment of FIGS. **1-7** and are selected in the group comprising: color filters configured to transmit light radiations having wavelengths comprised in one respective transmission band, diffusing filters configured to diffuse the passing-through light beam, hot filters configured to decrease the color temperature of the passing-through light beam, cold filters configured to increase the color temperature of the passing-through light beam, and Wood filter.

The portion of the annular filter **149** is configured to create an evanescence/fading effect during the rotation of the respective color device **140**, **141**, **142**.

In particular, the portion of the annular filter **149** is configured to determine a progressive color change in the beam passing through it during the rotation of the respective color device **140**, **141**, **142**.

Substantially, the portion of the annular filter **149** has the same effect of the plurality of color filters **46b**, **56b** and **66b** consecutively arranged in each of the color device **40**, **41**, and **42**.

In essence, in this new embodiment a single filter is used instead of a plurality of filters consecutively arranged.

In the non limiting example here disclosed, color device **140** comprise a portion of an annular filter **149a** able to create a progression of cyan color, color device **141** comprise a portion of an annular filter **149b** able to create a progression of magenta color, while color device **142** comprise a portion of an annular filter **149c** able to create a progression of yellow color.

Analogously to what disclosed for the embodiment of FIG. **1-7**, thanks to the particular structure of the portion of the annular filter **149a**, during the rotation of the color device **140** about its own rotational axis D, one can gradually change the coloring of the projected light beam from a lighter cyan to a darker cyan or vice versa according to the direction of rotation of the first color device **140**.

Thanks to the particular structure of the portion of the annular filter **149b**, during the rotation of the color device **141** about its own rotational axis D, one can gradually change the coloring of the projected light beam from a lighter magenta to a darker magenta or vice versa according to the direction of rotation of the color device **141**.

Finally thanks to the particular structure of the portion of the annular filter **149c**, during the rotation of the color device **142** about its own rotational axis D, one can gradually change the coloring of the projected light beam from a

lighter yellow to a darker yellow or vice versa according to the direction of rotation of the color device **142**.

Preferably, the portion of annular filters **149a**, **149b** and **149c** are obtained by removal of layers of dielectric material deposited on a glass substrate. Preferably, the layers removal is obtained using a laser technique.

Thanks to the integration of different filters in one single color device, with the stage light fixture according to the present invention it is possible to obtain a plurality of lighting effects and at the same time to reduce at the minimum the dimensions and the weight of the stage light fixture itself.

Light fixtures of the prior art, in fact, are able to obtain the same lighting effects using more devices than the ones used in the present invention.

Finally, it is clear that the stage light fixture described herein can be subject to changes and variations, without for this reason going beyond the scope of protection of the appended claims.

The invention claimed is:

1. Stage light fixture comprising:

- a short arc lamp adapted to emit a light beam along an optical axis;
- a reflector associated to the short arc lamp so as to concentrate light beam rays substantially at a work point;
- an output optical assembly, arranged at the most downstream point along the optical axis, having a focal point arranged between the short arc lamp and the output optical assembly and coinciding with the work point;
- at least one color assembly comprising a plurality of color discs configured to selectively color the light beam; the color assembly being arranged between the short arc lamp and the work point, wherein each color disc is rotatable about a same rotational axis;
- wherein each color disc of the plurality of color discs comprises at least one first filter and at least one second filter, the first filter being a color filter configured to transmit light radiation having wavelengths comprised in at least one first respective band;
- wherein the at least one second filter is selected in the group comprising:
 - a hot filter, configured to reduce the color temperature of the passing-through light beam,
 - a cold filter configured to increase the color temperature of the passing-through light beam,
 - a wood filter, and
 - diffusing filter, configured to diffuse the passing-through light beam.

2. Stage light fixture according to claim **1**, wherein the color discs are parallel.

3. Stage light fixture according to claim **1**, wherein at least one color disc is transversal to the optical axis so as to form a first angle with a plane perpendicular to the optical axis.

4. Stage light fixture according to claim **3**, wherein the first angle is a dihedral angle that is between 6° and 10° .

5. Stage light fixture according to claim **1**, wherein the color discs are independently moved.

6. Stage light fixture according to claim **1**, wherein rotational axis is inclined with respect to the optical axis of a second angle that is between 6° and 10° .

7. Stage light fixture according to claim **1**, wherein the color assembly is arranged so as, in use, at least one portion of each color disc intersects the optical axis.

15

8. Stage light fixture according to claim 1, wherein the first filter is configured to create a progressive change of color in the beam passing through it during the rotation of the respective color disc.

9. Stage light fixture according to claim 8, wherein the first filter is at least a portion of an annular filter. 5

10. Stage light fixture according to claim 1, comprising a plurality of first filters arranged in succession along an annular path and configured to transmit respective light radiations so as to create a progressive change of color in the beam passing through them during the rotation of the respective color device. 10

11. Stage light fixture according to claim 1, comprising at least one dimmer arranged between the short arc lamp and the color assembly. 15

12. Stage light fixture according to claim 1, comprising at least one heat-shield filter arranged between the short arc lamp and the color assembly.

13. Stage light fixture according to claim 12, wherein the heat-shield filter is transversal to the optical axis so as to form a third angle with a plane perpendicular to the optical axis, the third angle being between 6° and 10°. 20

14. Stage light fixture according to claim 12, wherein the heat-shield filter is arranged along a plane which intersects a plane comprising at least one color disc device, so as to form a fourth angle, the fourth angle being between 12° and 20°. 25

15. Stage light fixture according to claim 1, comprising at least one gobos device arranged at the work point.

16. Stage light fixture comprising: 30
- a short arc lamp adapted to emit a light beam along an optical axis;
 - a reflector associated to the short arc lamp so as to concentrate light beam rays substantially at a work point;
 - an output optical assembly, arranged at the most downstream point along the optical axis, having a focal point

16

arranged between the short arc lamp and the output optical assembly and coinciding with the work point; at least one color assembly comprising at least a first color disc and a second color disc each of which is configured to selectively color the light beam; the color assembly being arranged between the short arc lamp and the work point;

wherein the first color disc comprises a plurality of discrete first filters and at least two second filters, each first filter being a color filter configured to transmit light radiation having wavelengths comprised in at least one first respective band;

wherein the at least two second filters are different types of filters relative to one another and are selected from the group comprising:

- a hot filter, configured to reduce the color temperature of the passing-through light beam,
- a cold filter configured to increase the color temperature of the passing-through light beam,
- a wood filter, and
- a diffusing filter, configured to diffuse the passing-through light beam;

wherein the plurality of discrete first filters are configured to create a progressive change of color in the beam passing through it during the rotation of the respective color disc; and

wherein the second color disc comprises a plurality of color filters and at least one second filter.

17. Stage light fixture according to claim 16, wherein a number of first filters in the first color disc is different than a number of first filters in the second color disc.

18. Stage light fixture according to claim 16, wherein the first color disc and the second color disc are rotatable about a same rotational axis. 35

* * * * *