



(12) **United States Patent**
Kinzer et al.

(10) **Patent No.:** **US 11,149,923 B2**
(45) **Date of Patent:** **Oct. 19, 2021**

(54) **LIGHTING FIXTURE**

USPC 362/249.02, 296.01, 297-309, 311.02,
362/326-328, 341, 346-350, 551-555
See application file for complete search history.

(71) Applicant: **Electronic Theatre Controls, Inc.**,
Middleton, WI (US)

(56) **References Cited**

(72) Inventors: **David J. Kinzer**, Middleton, WI (US);
Frank Tornyai, Santa Maria, CA (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **Electronic Theatre Controls, Inc.**,
Middleton, WI (US)

6,200,002 B1 3/2001 Marshall et al.
6,222,623 B1 4/2001 Wetherell
6,382,803 B1 5/2002 Arumugasaamy
6,527,411 B1 3/2003 Sayers
6,536,914 B2 3/2003 Hoele et al.
6,547,416 B2 4/2003 Pashley et al.

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(Continued)

(21) Appl. No.: **16/998,427**

FOREIGN PATENT DOCUMENTS

(22) Filed: **Aug. 20, 2020**

WO WO2015/138483 A2 9/2015

(65) **Prior Publication Data**

US 2020/0378580 A1 Dec. 3, 2020

Related U.S. Application Data

OTHER PUBLICATIONS

(63) Continuation of application No. 16/587,176, filed on
Sep. 30, 2019.

Office Action issued from the Germany Patent Office for related
Application No. 102019126521.5 dated Jul. 27, 2020 (9 Pages
including Statement of Relevance).

(Continued)

(60) Provisional application No. 62/740,010, filed on Oct.
2, 2018.

Primary Examiner — Jason M Han
(74) *Attorney, Agent, or Firm* — Michael Best and
Friedrich LLP

(51) **Int. Cl.**

F21V 14/06 (2006.01)
F21V 5/00 (2018.01)
F21V 7/00 (2006.01)
F21V 15/01 (2006.01)
F21K 9/62 (2016.01)

(57) **ABSTRACT**

(52) **U.S. Cl.**


CPC **F21V 14/06** (2013.01); **F21K 9/62**
(2016.08); **F21V 5/007** (2013.01); **F21V**
7/0008 (2013.01); **F21V 15/01** (2013.01)

A lighting fixture including a light source having an array of
light emitting diodes (LEDs); a reflector having an input end
adjacent the array of LEDs and an output end opposite the
input end such that the light source emits light through the
reflector from the input end through the output end; and a
tandem lens array adjacent the output end of the reflector.
The tandem lens array includes a first side that faces toward
the array of LEDs and a second side that is opposite the first
side, wherein the first side includes an array of lenses and the
second side includes an array of lenses.

(58) **Field of Classification Search**

CPC .. F21K 9/60-62; F21V 5/007; F21V 7/00-28;
F21V 14/06; F21V 15/01

20 Claims, 18 Drawing Sheets

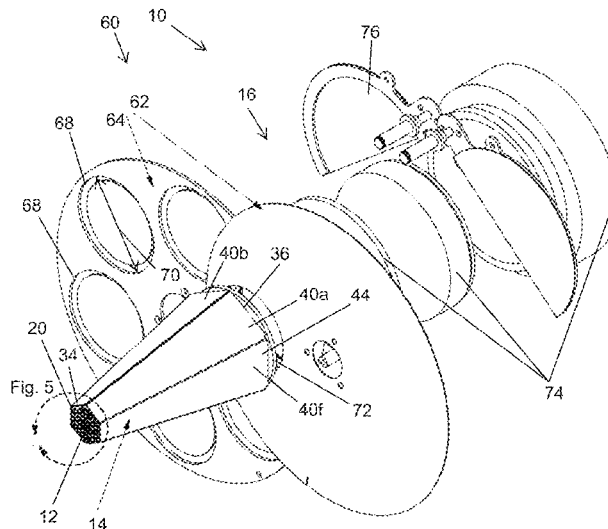

(56)

References Cited

U.S. PATENT DOCUMENTS

7,614,767 B2 11/2009 Zulim et al.
 7,777,955 B2 8/2010 Cassarly et al.
 7,874,487 B2 1/2011 Nunnink et al.
 7,946,729 B2 5/2011 Ivey et al.
 8,292,463 B2 10/2012 Speier et al.
 8,456,107 B2 6/2013 Saem
 8,529,103 B2 9/2013 Tukker et al.
 8,602,601 B2 12/2013 Khazi et al.
 8,733,949 B2 5/2014 Chong et al.
 8,814,376 B2 12/2014 Nicolai et al.
 8,915,612 B2 12/2014 Kurt et al.
 8,919,994 B2* 12/2014 Wimberly F21K 9/23
 362/232
 9,169,997 B2 10/2015 Kurt et al.
 9,249,947 B2 2/2016 Goldstein et al.
 9,746,596 B2 8/2017 Preston et al.
 9,995,872 B2 6/2018 Angelini et al.
 10,082,731 B2 9/2018 Kawasumi
 2006/0215401 A1* 9/2006 Menzel G02B 27/0101
 362/235
 2008/0170392 A1 7/2008 Speier et al.
 2008/0266893 A1 10/2008 Speier
 2008/0310152 A1 12/2008 Verbrugh et al.
 2010/0033948 A1 2/2010 Harbers et al.
 2010/0097802 A1 4/2010 Jurik
 2010/0113101 A1 10/2010 Adams
 2010/0284201 A1 11/2010 Alasaanela
 2011/0013389 A1 1/2011 Willemsen et al.

2012/0140463 A1 6/2012 Kinzer et al.
 2013/0155671 A1 6/2013 Kurt et al.
 2013/0329429 A1 12/2013 Lowes et al.
 2014/0117877 A1 5/2014 Mapel et al.
 2015/0362654 A1 12/2015 Sadasivan et al.
 2016/0018064 A1 1/2016 Jurik et al.
 2016/0208999 A1 7/2016 Jurik
 2016/0370529 A1 12/2016 Angelini et al.
 2017/0146204 A1* 5/2017 Di Trapani G02B 3/0062

OTHER PUBLICATIONS

Wippermann, et al., "Beam homogenizers based on chirped microlens arrays" Optics express vol. 15, No. 10, May 14, 2007, pp. 6218-6231.
 Search/Examination Report issued from the United Kingdom Patent Office for related Application No. GB1914135.7 dated Feb. 12, 2020 (7 pages).
 Edwin Diaz, "Prototyping illuminations systems with stock optical components" Photonik International 2012 originally published in German in Photonik, Mar. 2012, 4 Pages.
 Intematix, "Mixing Chamber Design Considerations for Chromalit™ Remote Phosphor Light Sources", website: <http://www.intematix.com/uploads/application%20notes/MixingChamberDesign.pdf>, Application Literature dated Dec. 14, 2017, 11 Pages.
 Office Action issued from the US Patent Office for related U.S. Appl. No. 16/587,176 dated Sep. 24, 2020 (12 Pages including form 892).

* cited by examiner

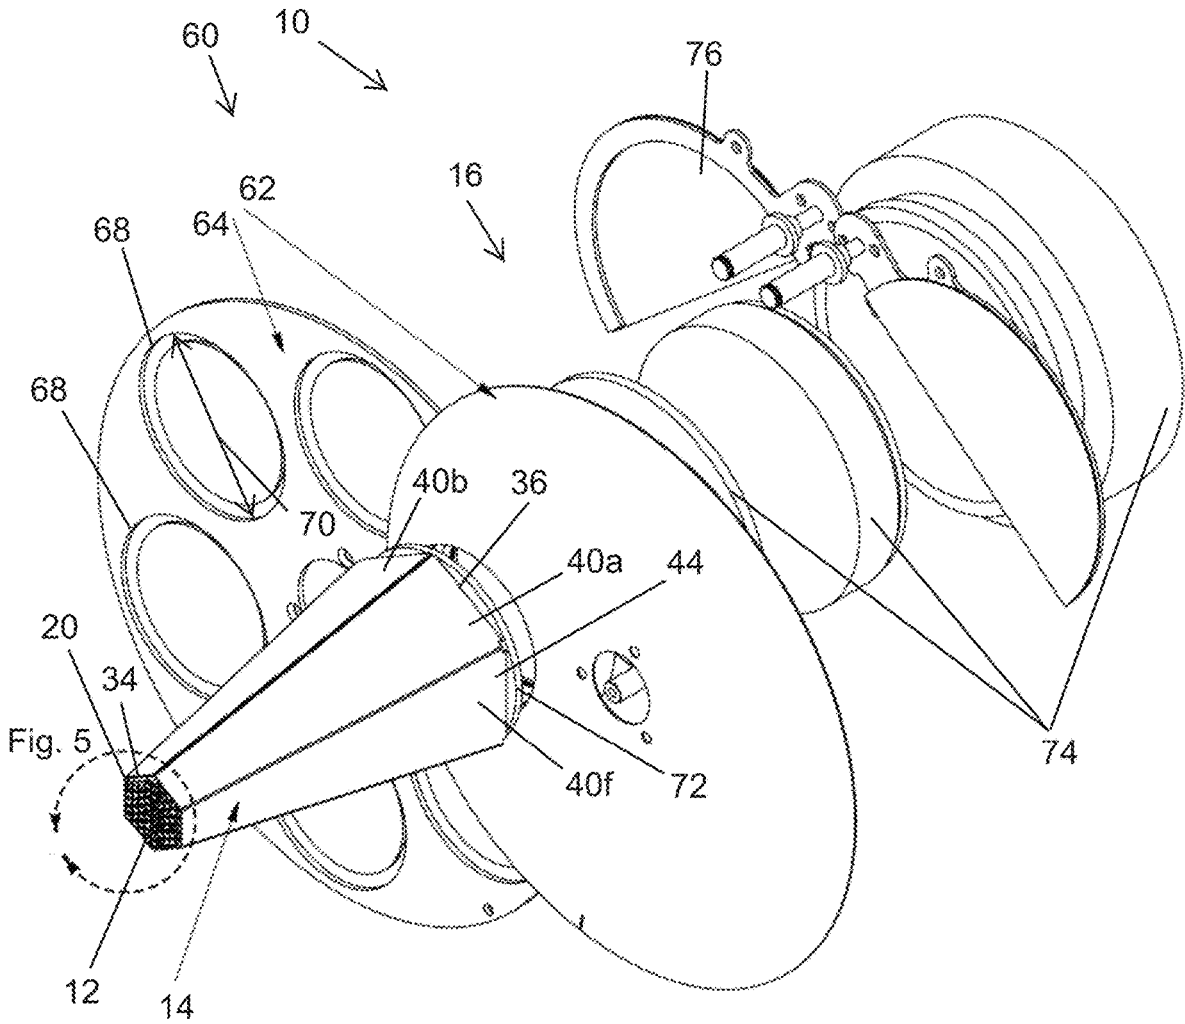


FIG. 1

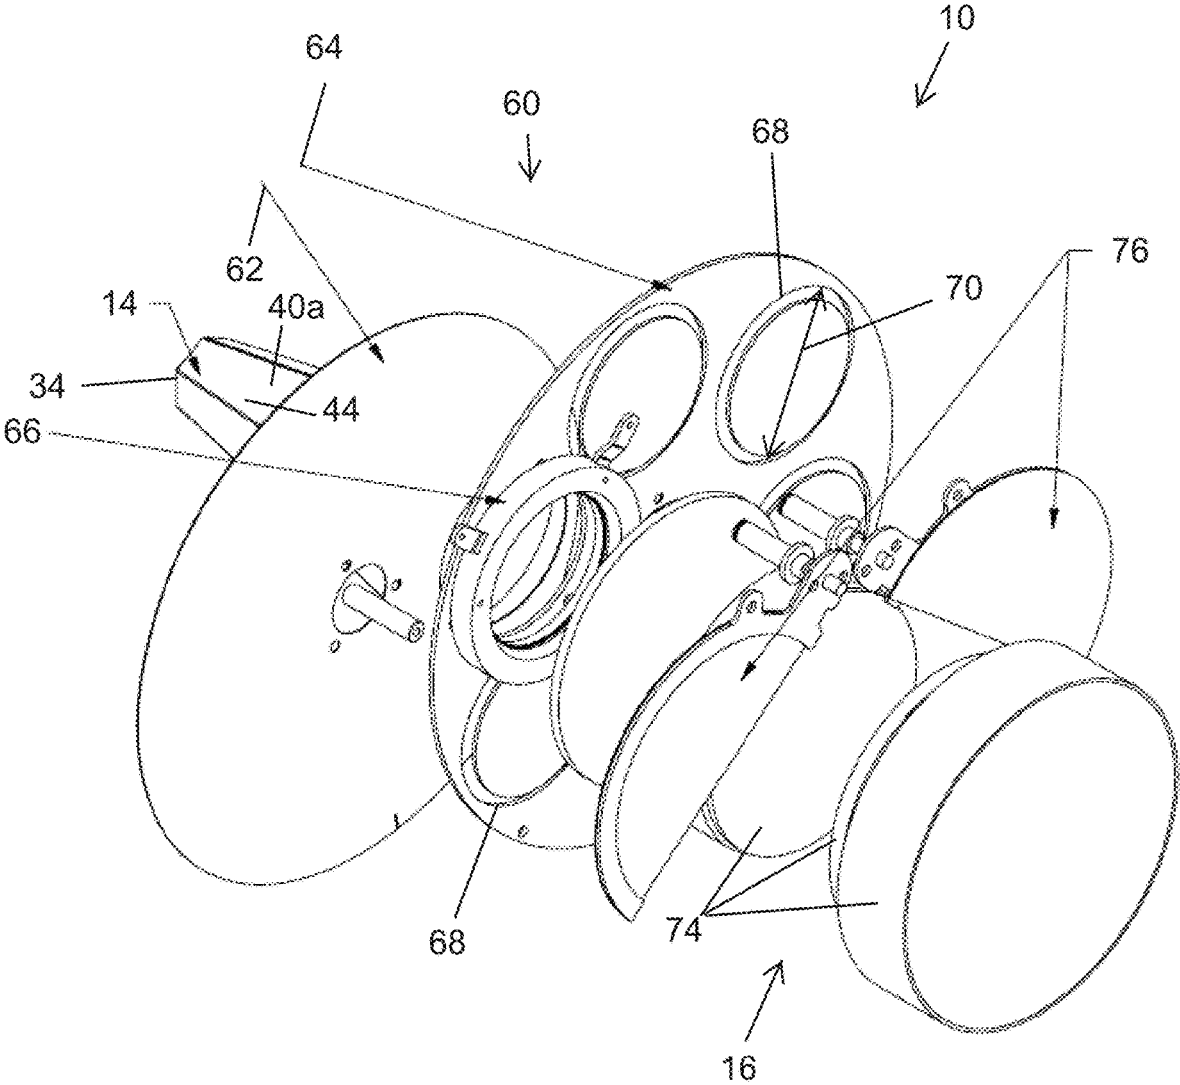
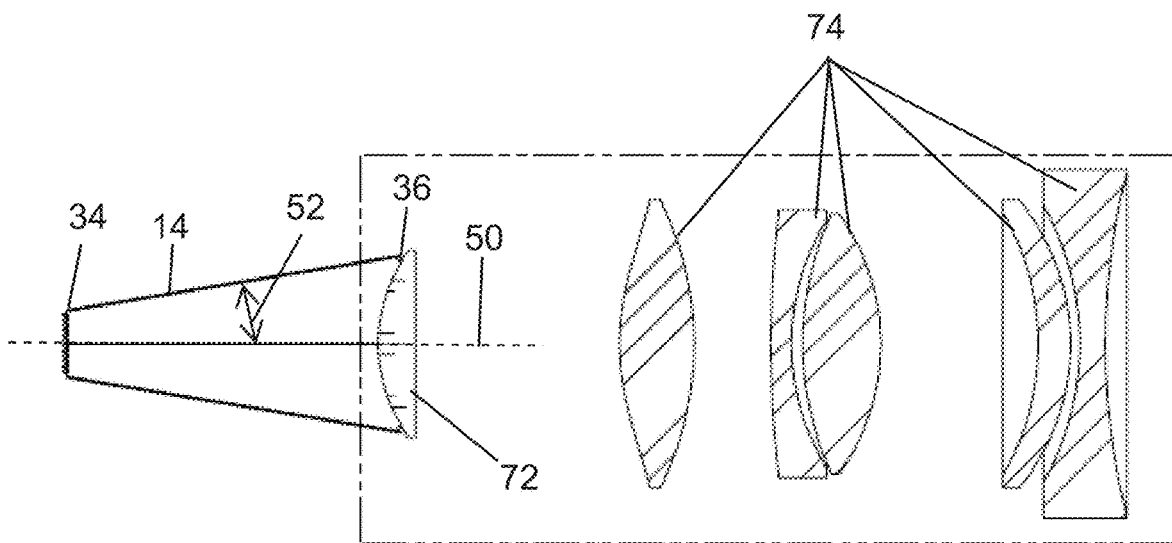
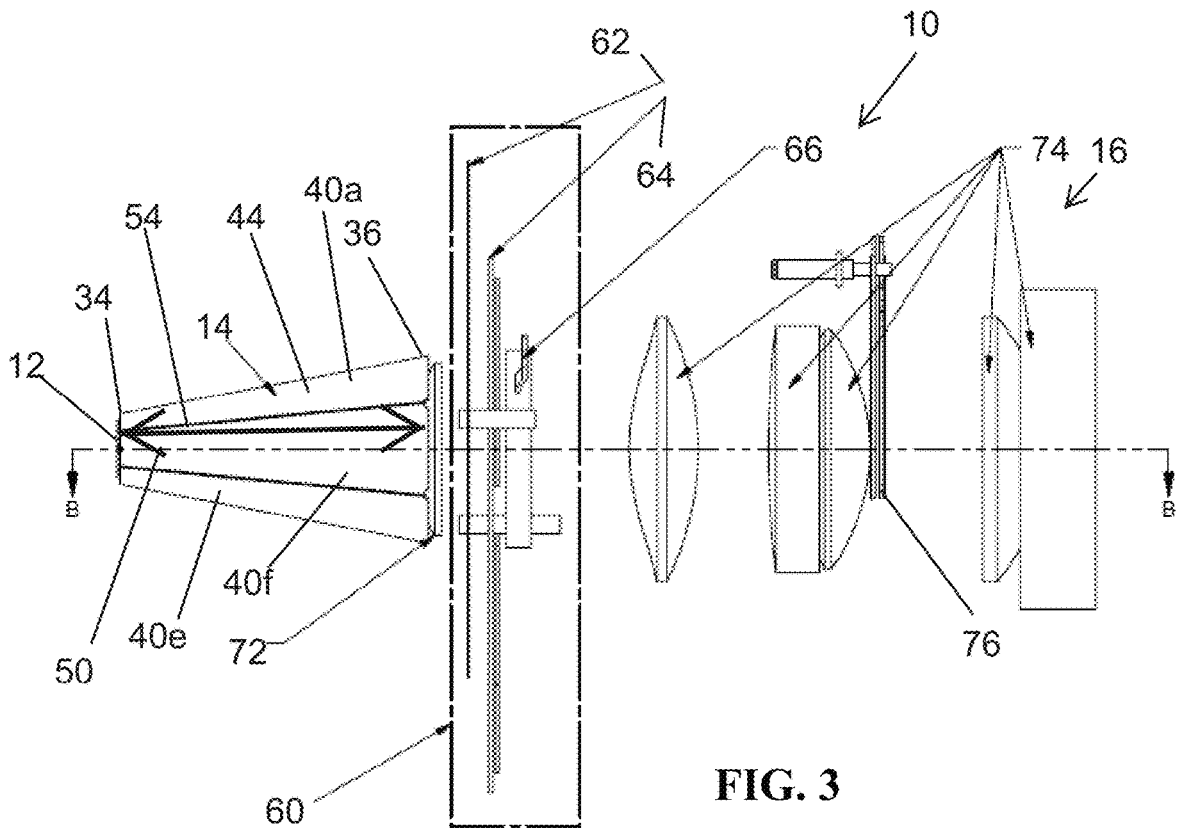


FIG. 2



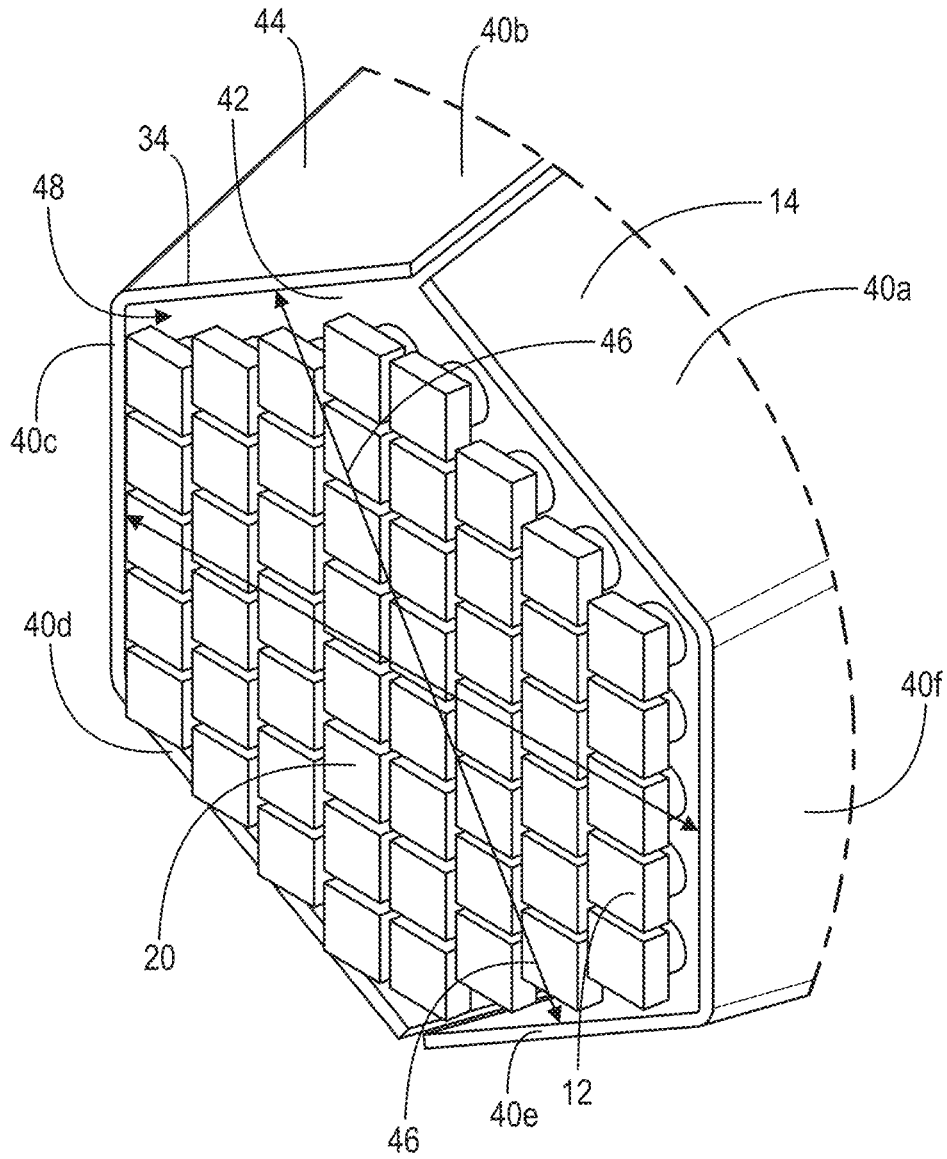


FIG. 5

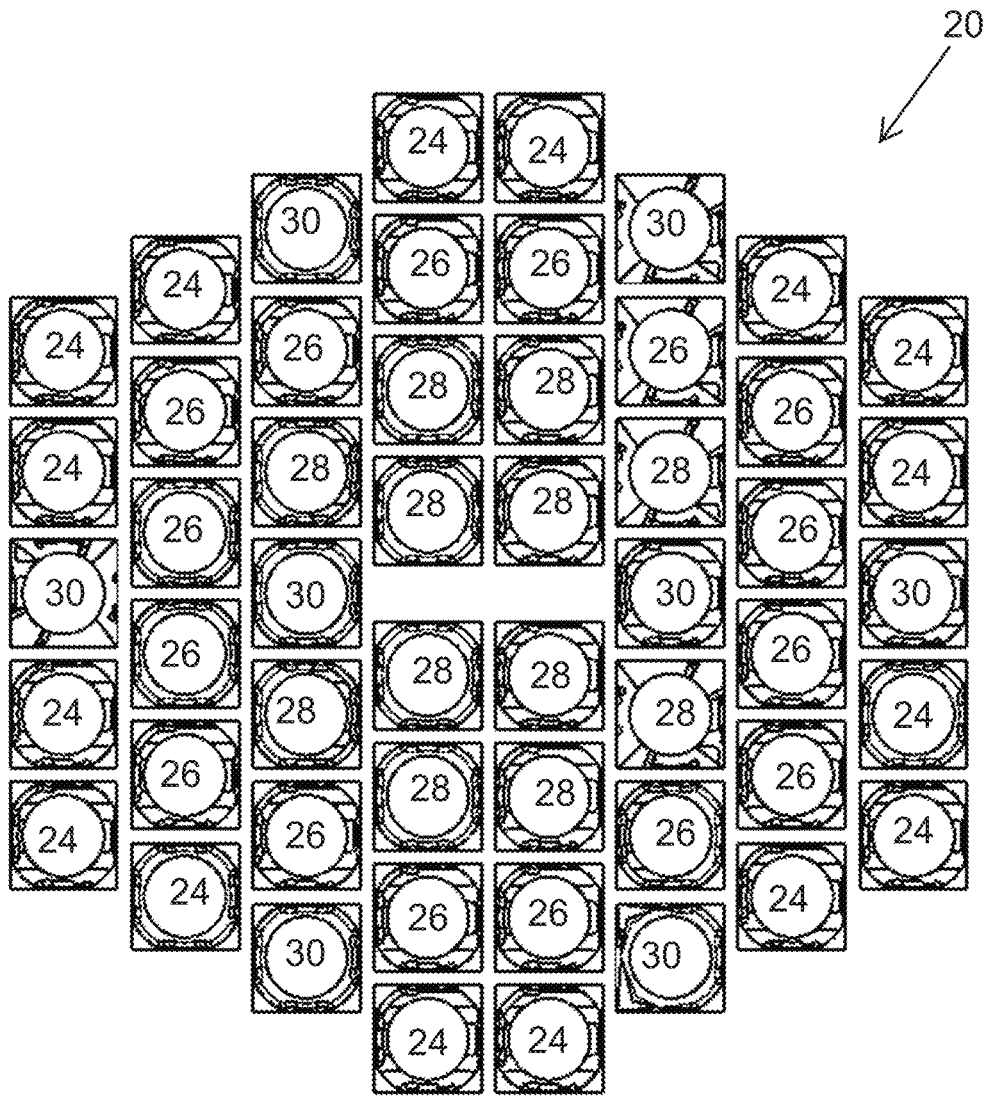


FIG. 6

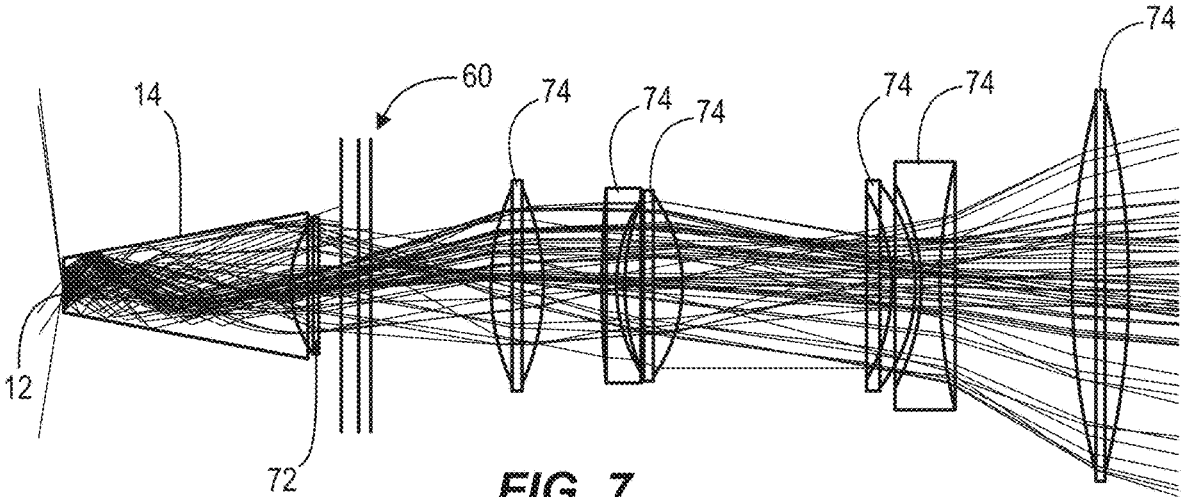


FIG. 7

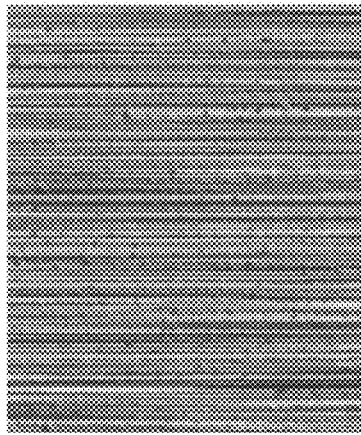
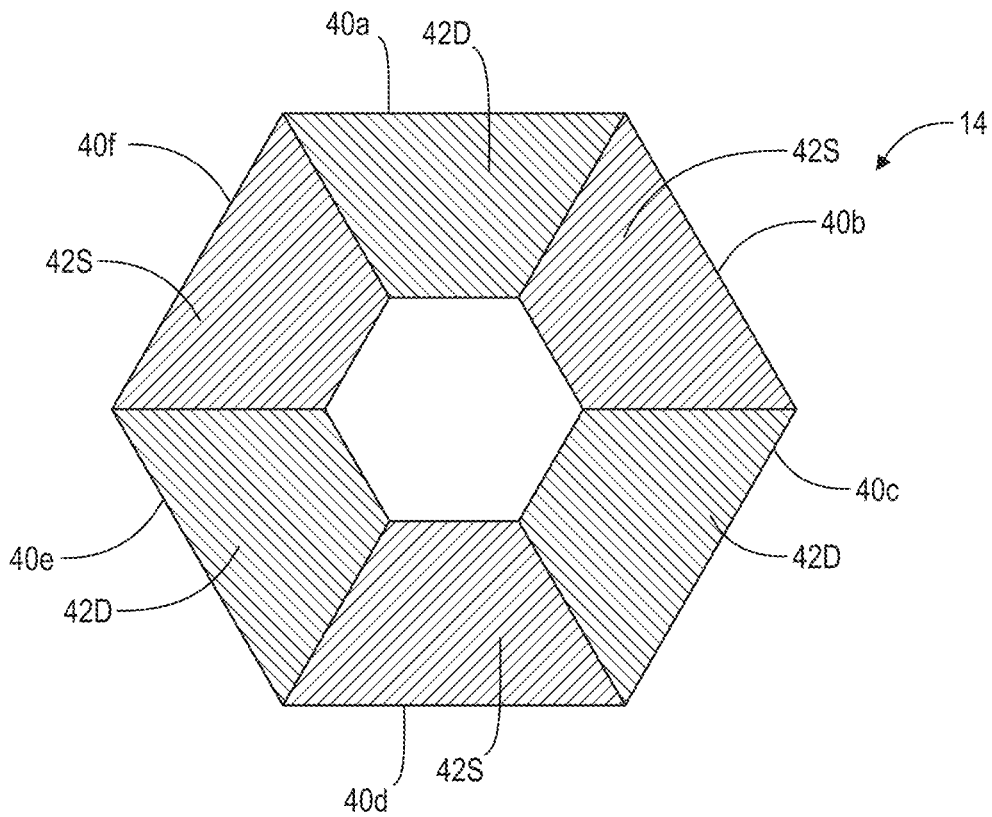
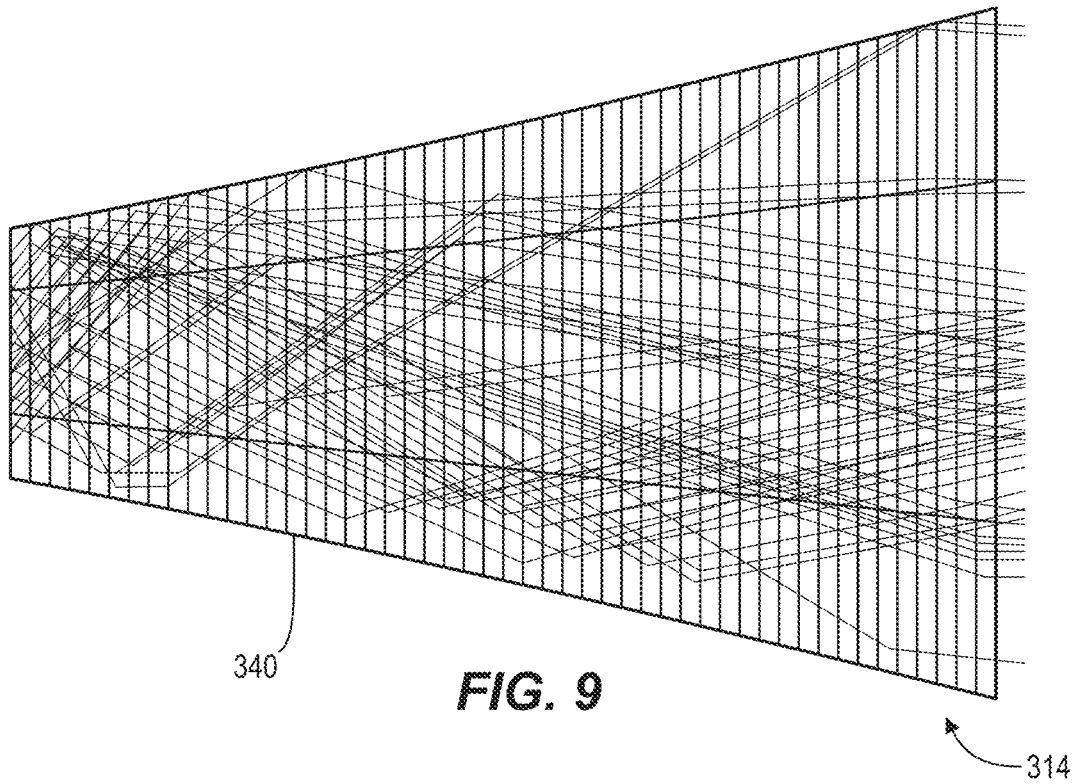


FIG. 8



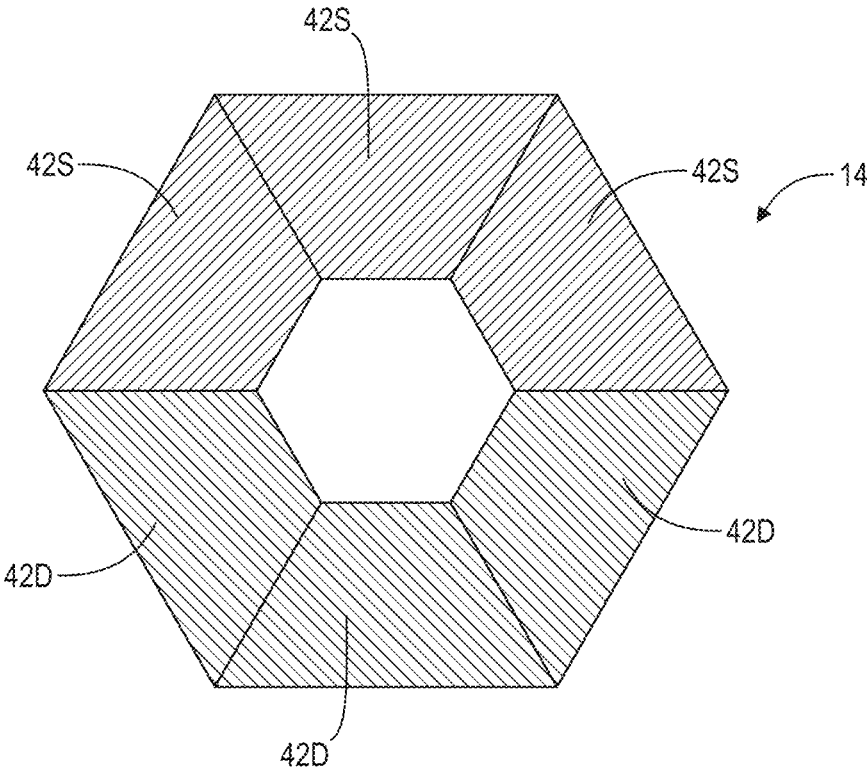


FIG. 10B

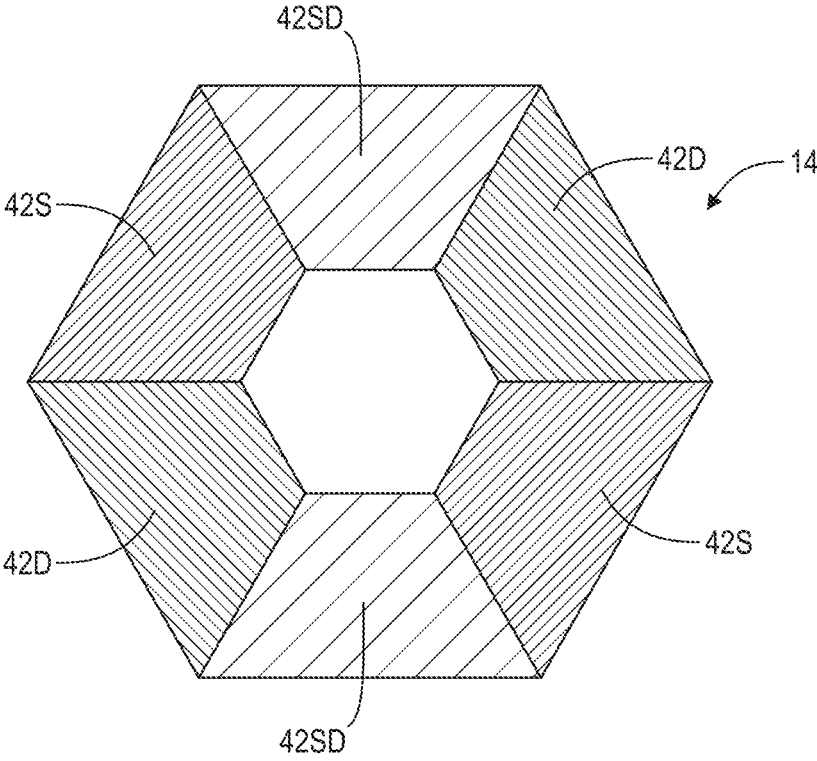


FIG. 10C

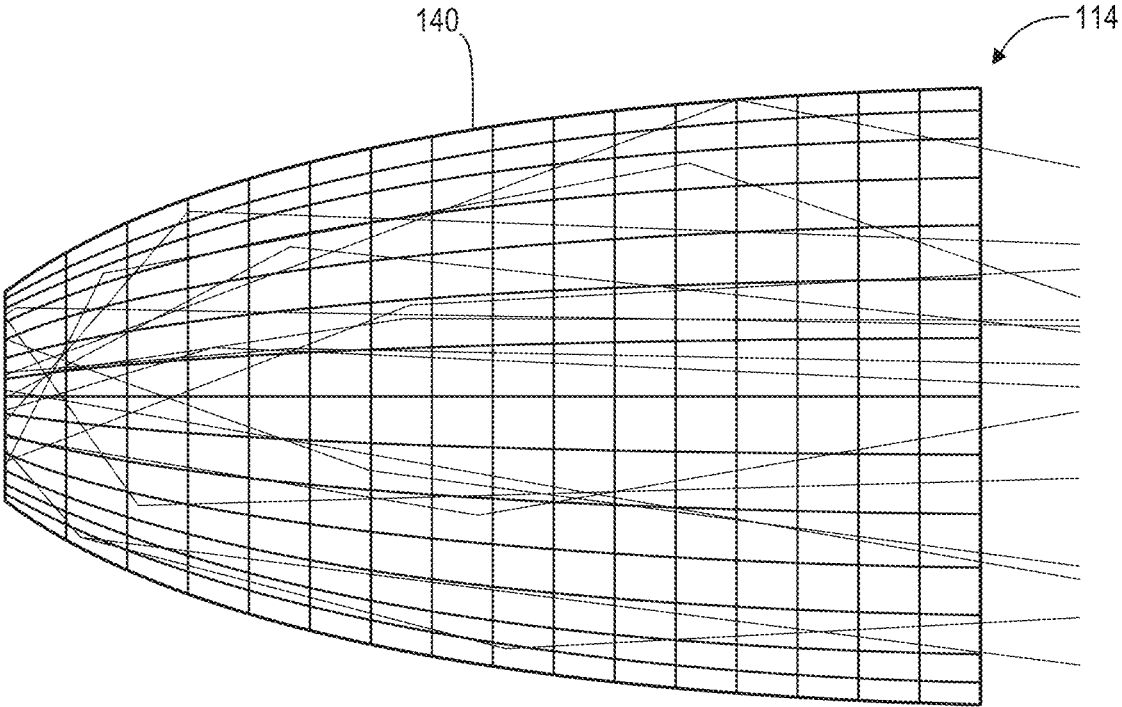


FIG. 11

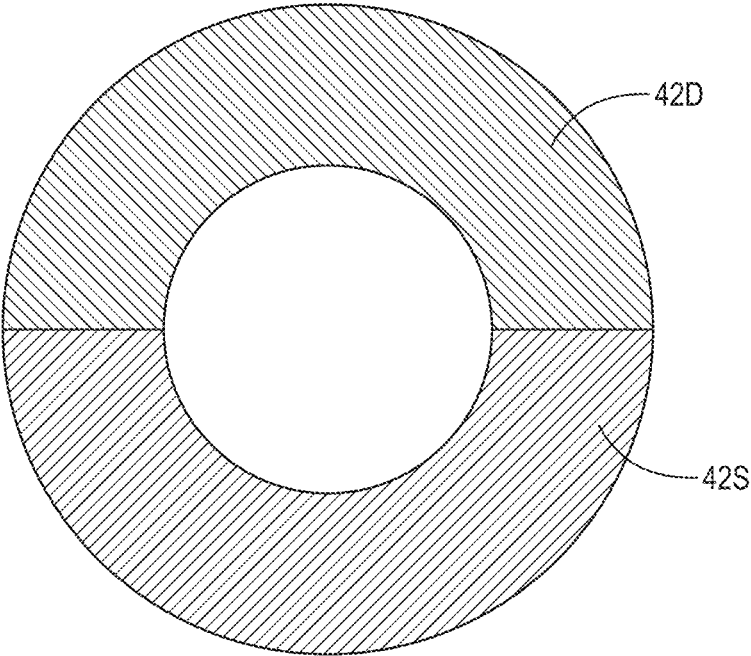


FIG. 12

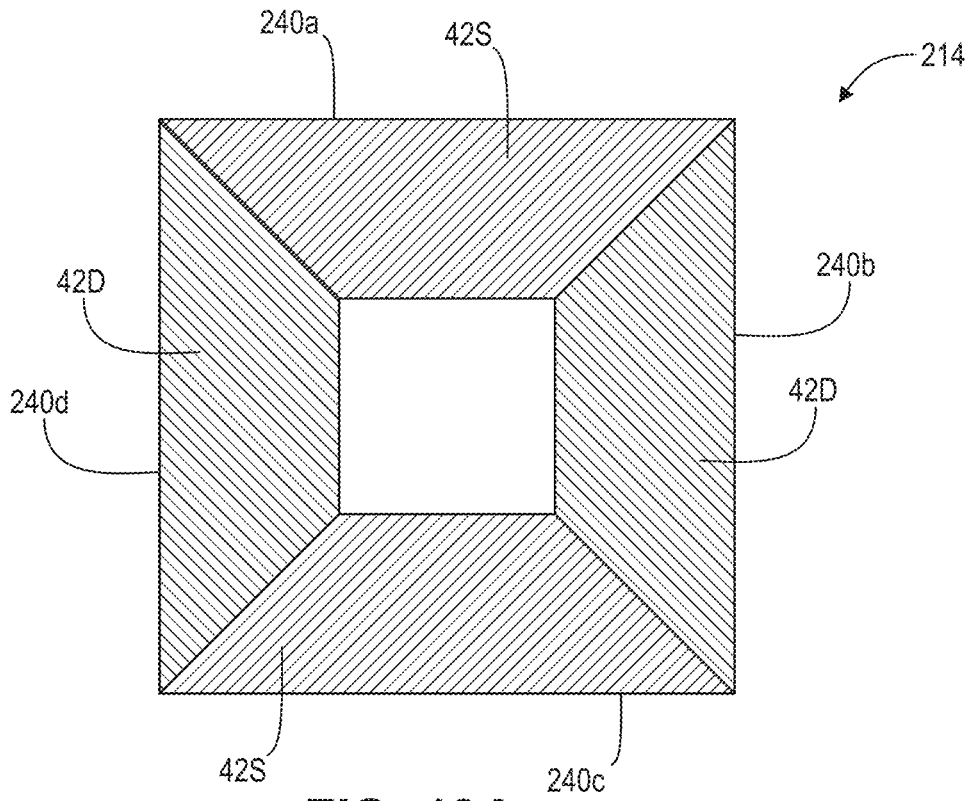


FIG. 13A

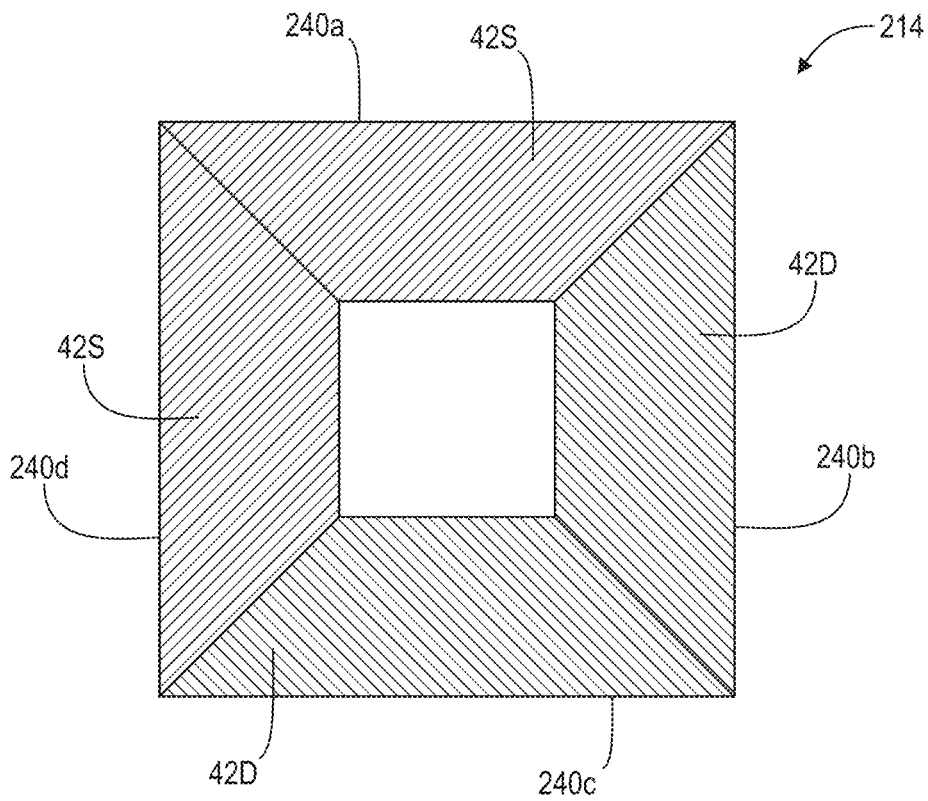


FIG. 13B

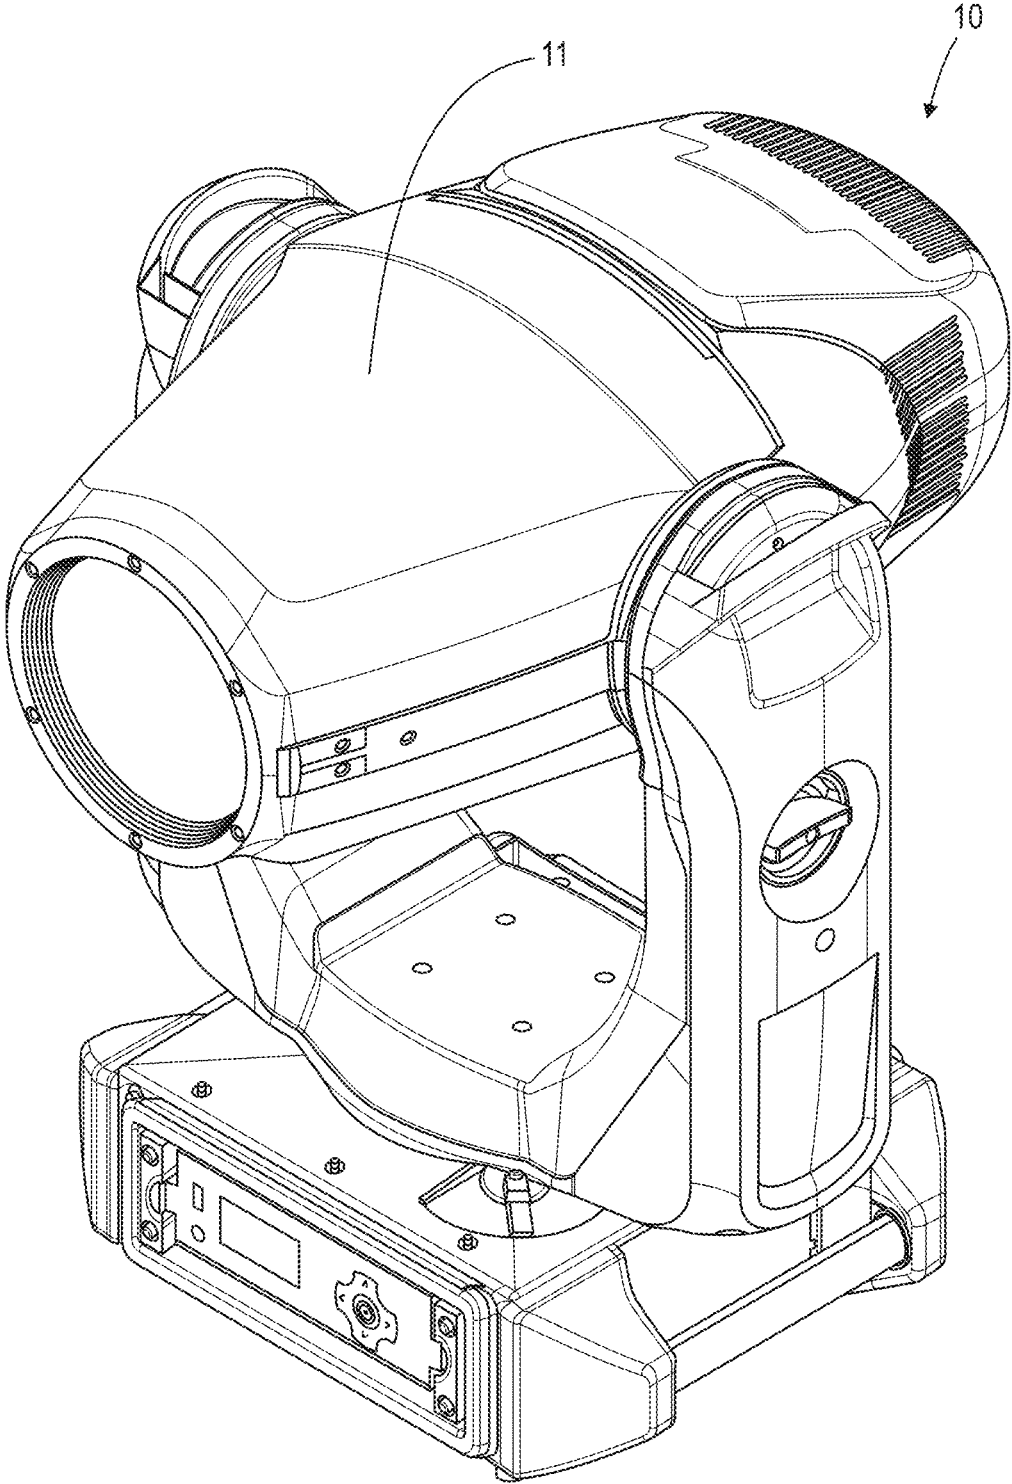


FIG. 14

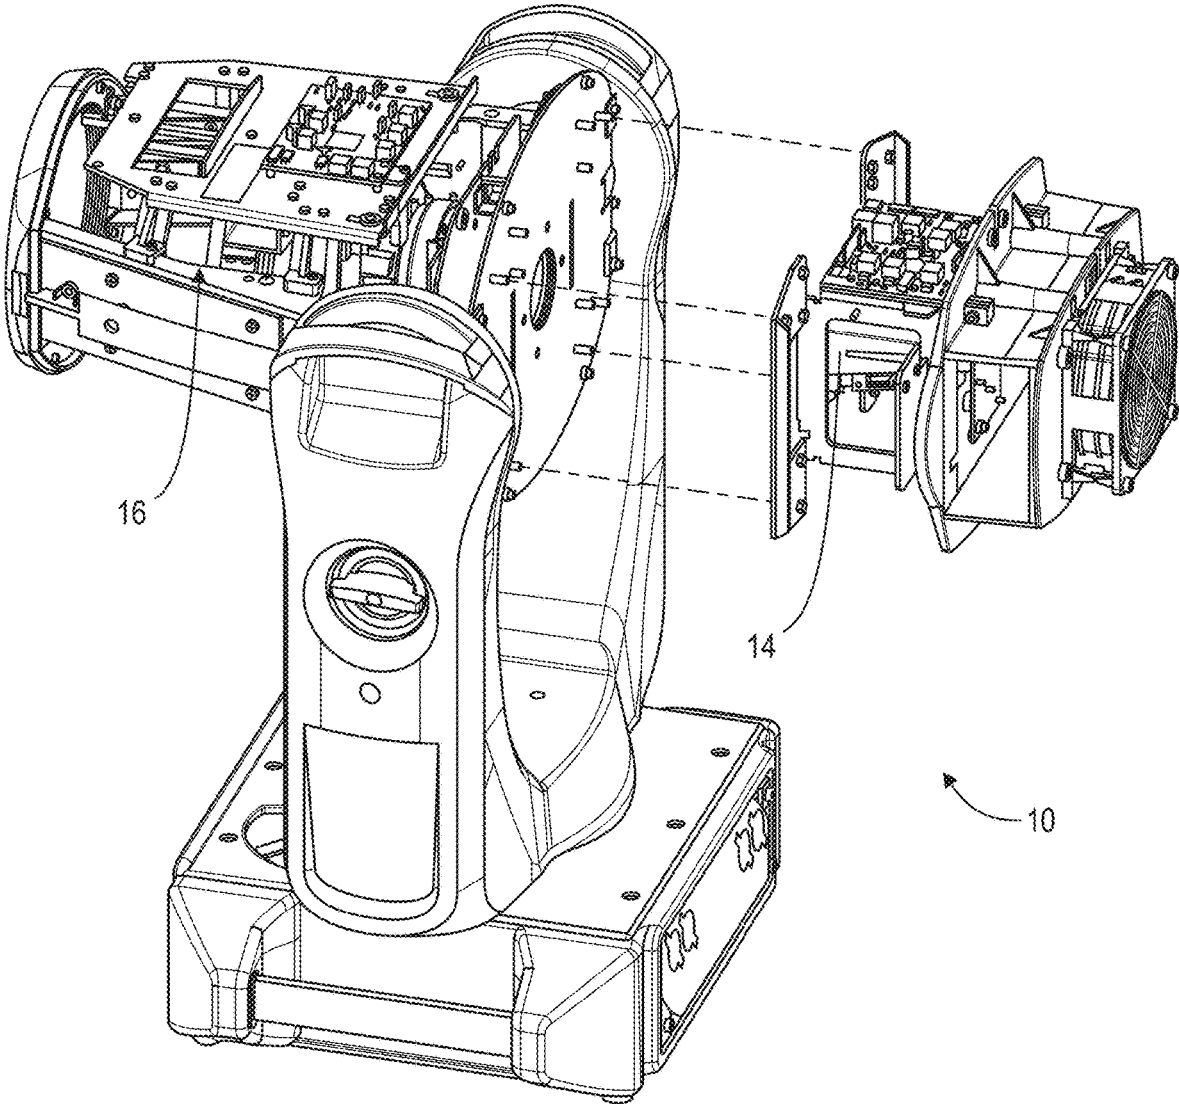


FIG. 15

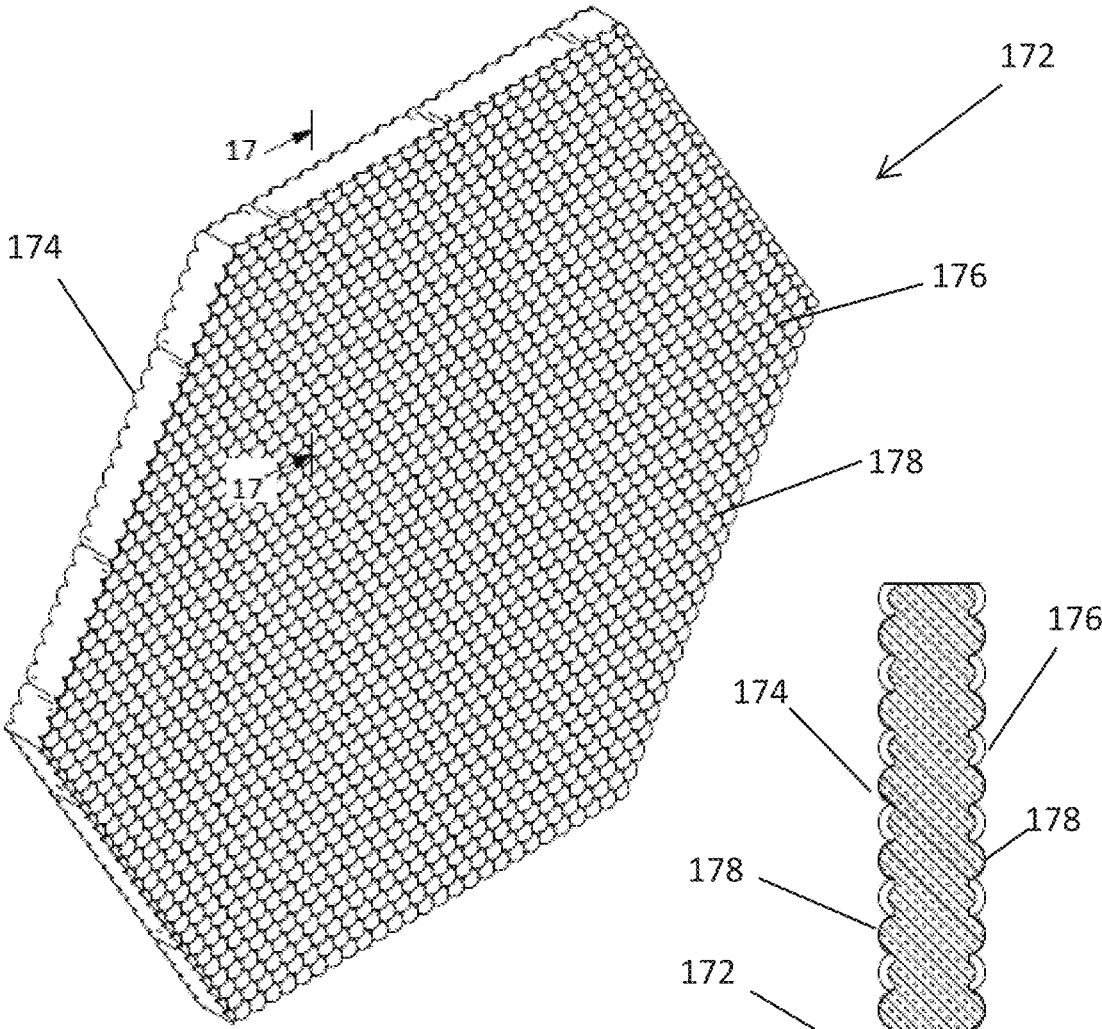


FIG. 16

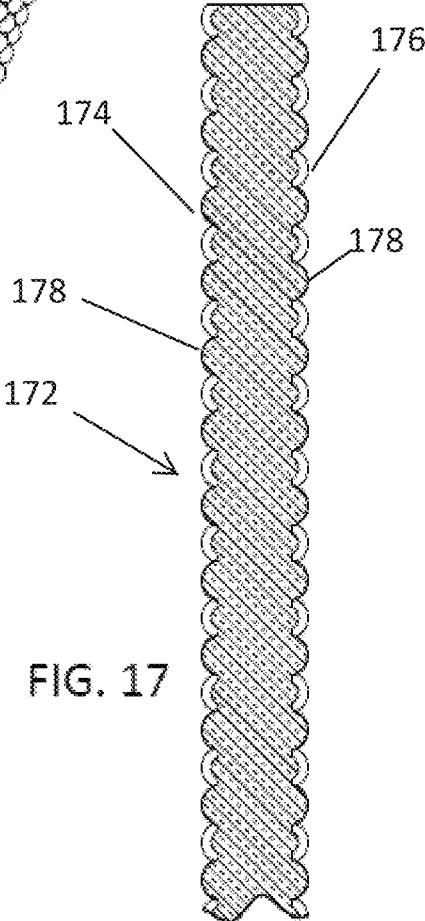


FIG. 17

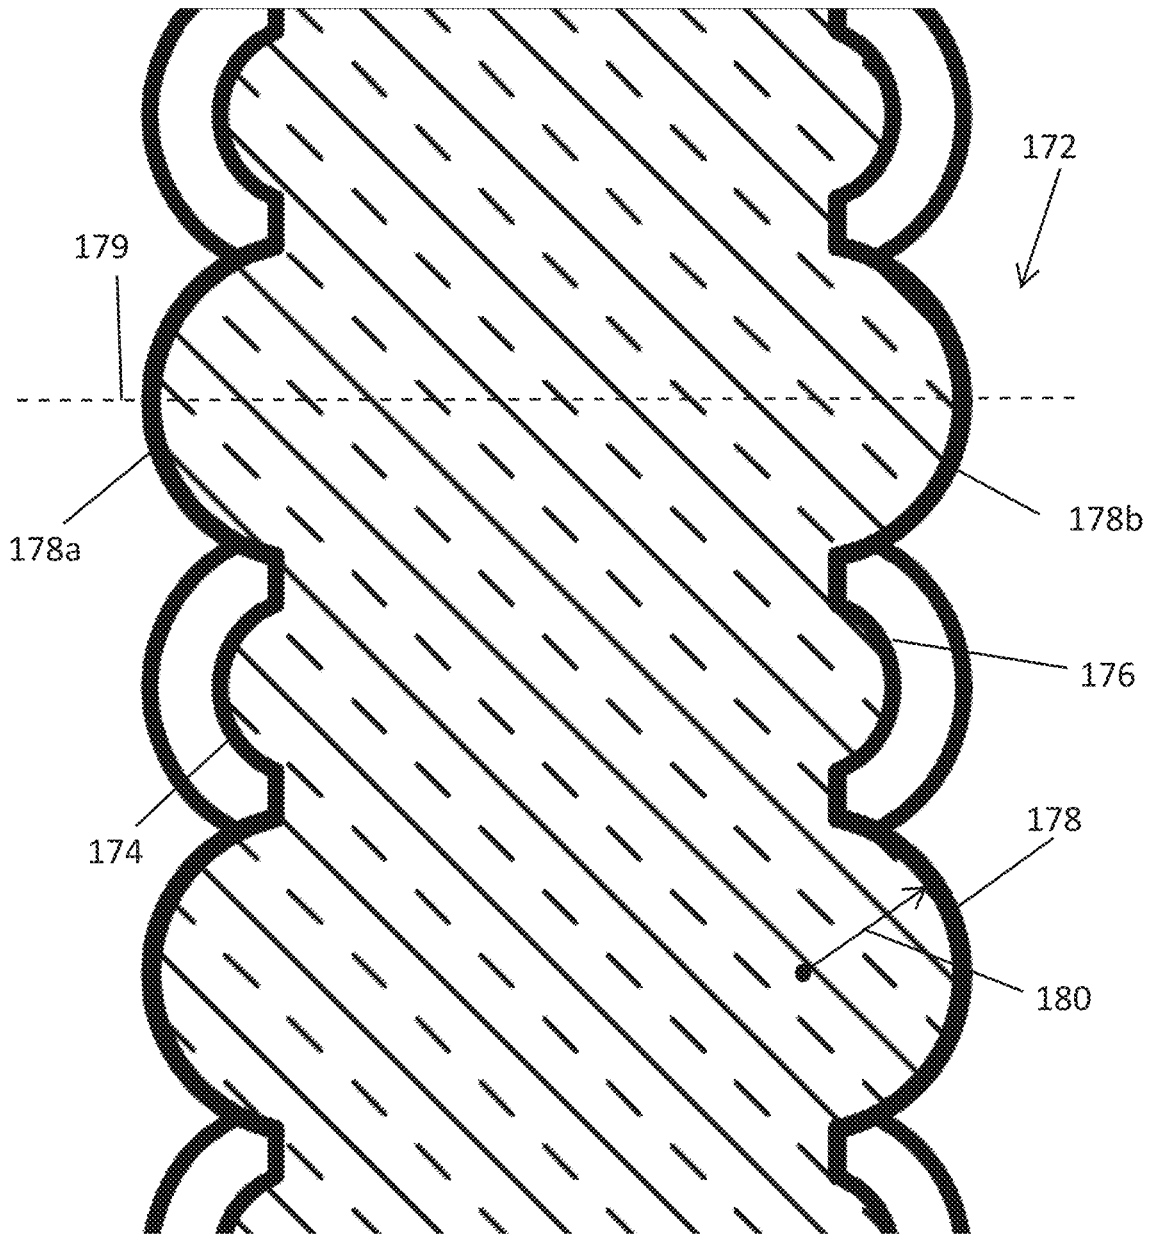


FIG. 18

182

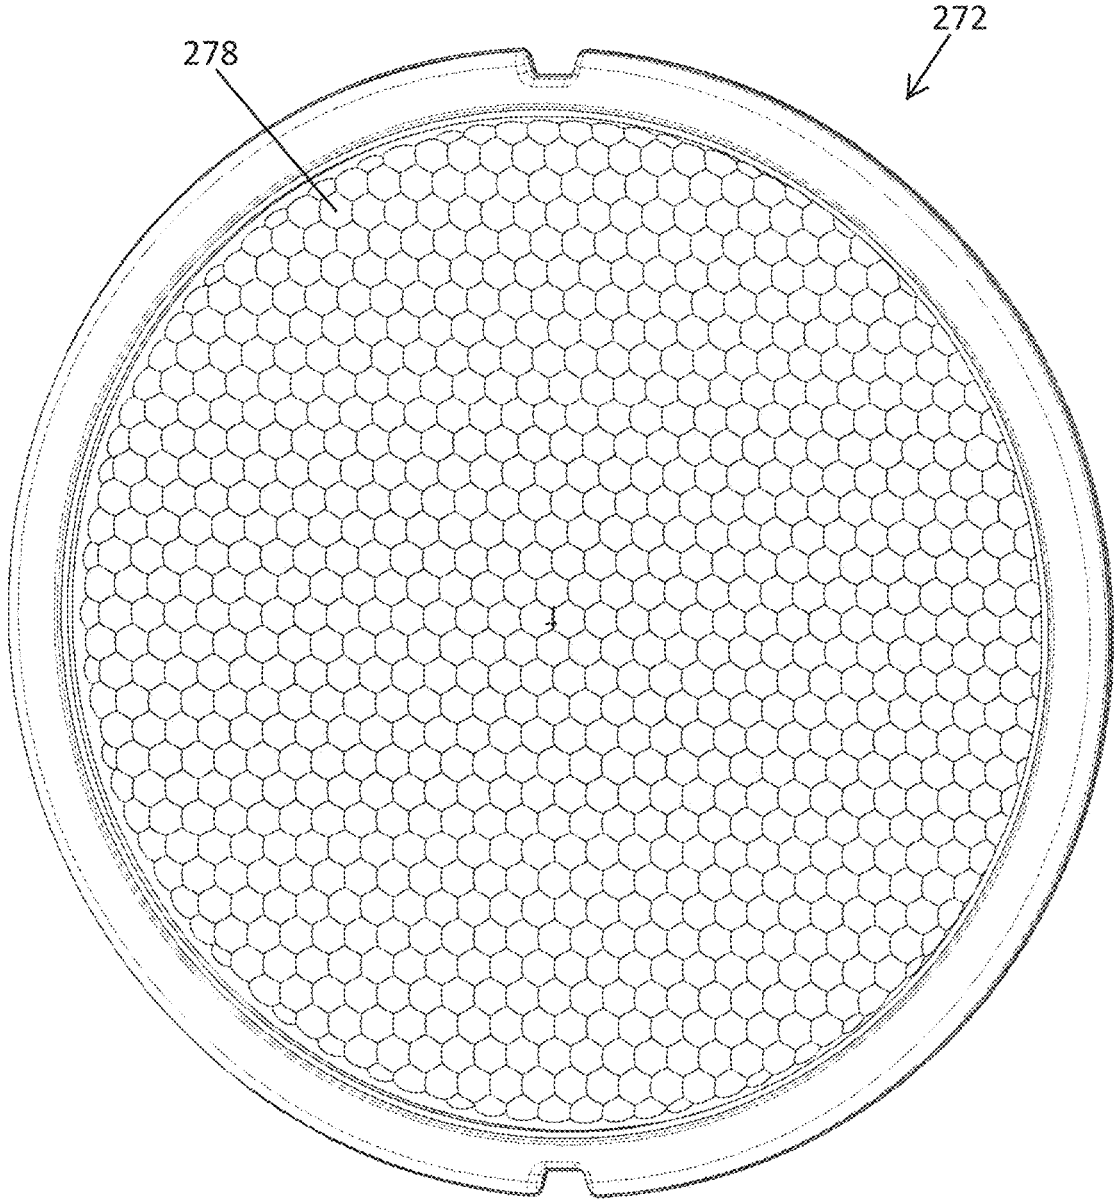


FIG. 19

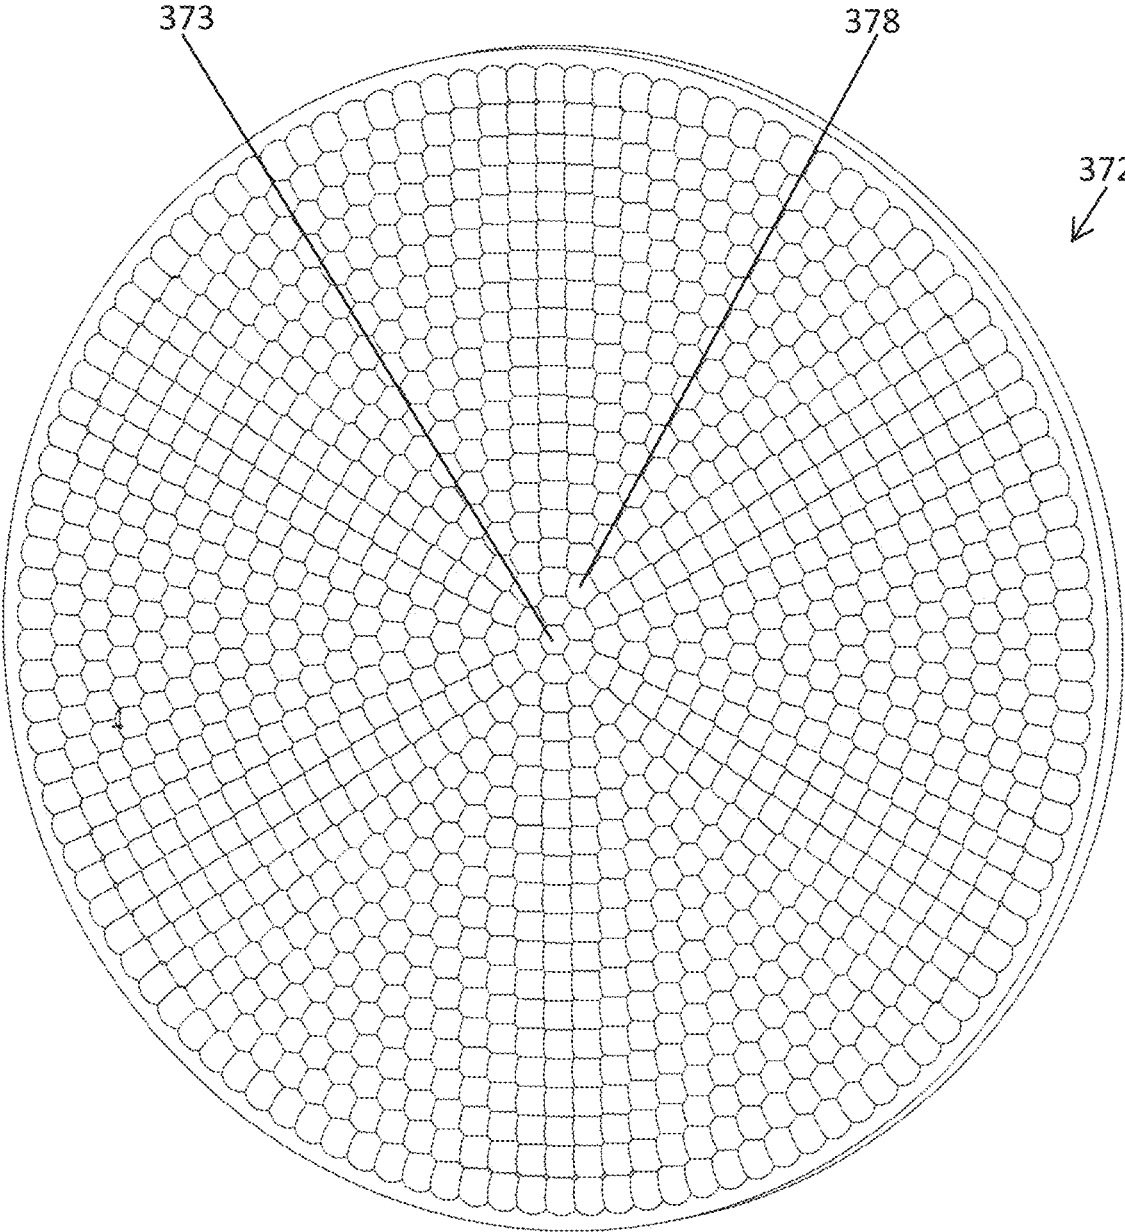


FIG. 20

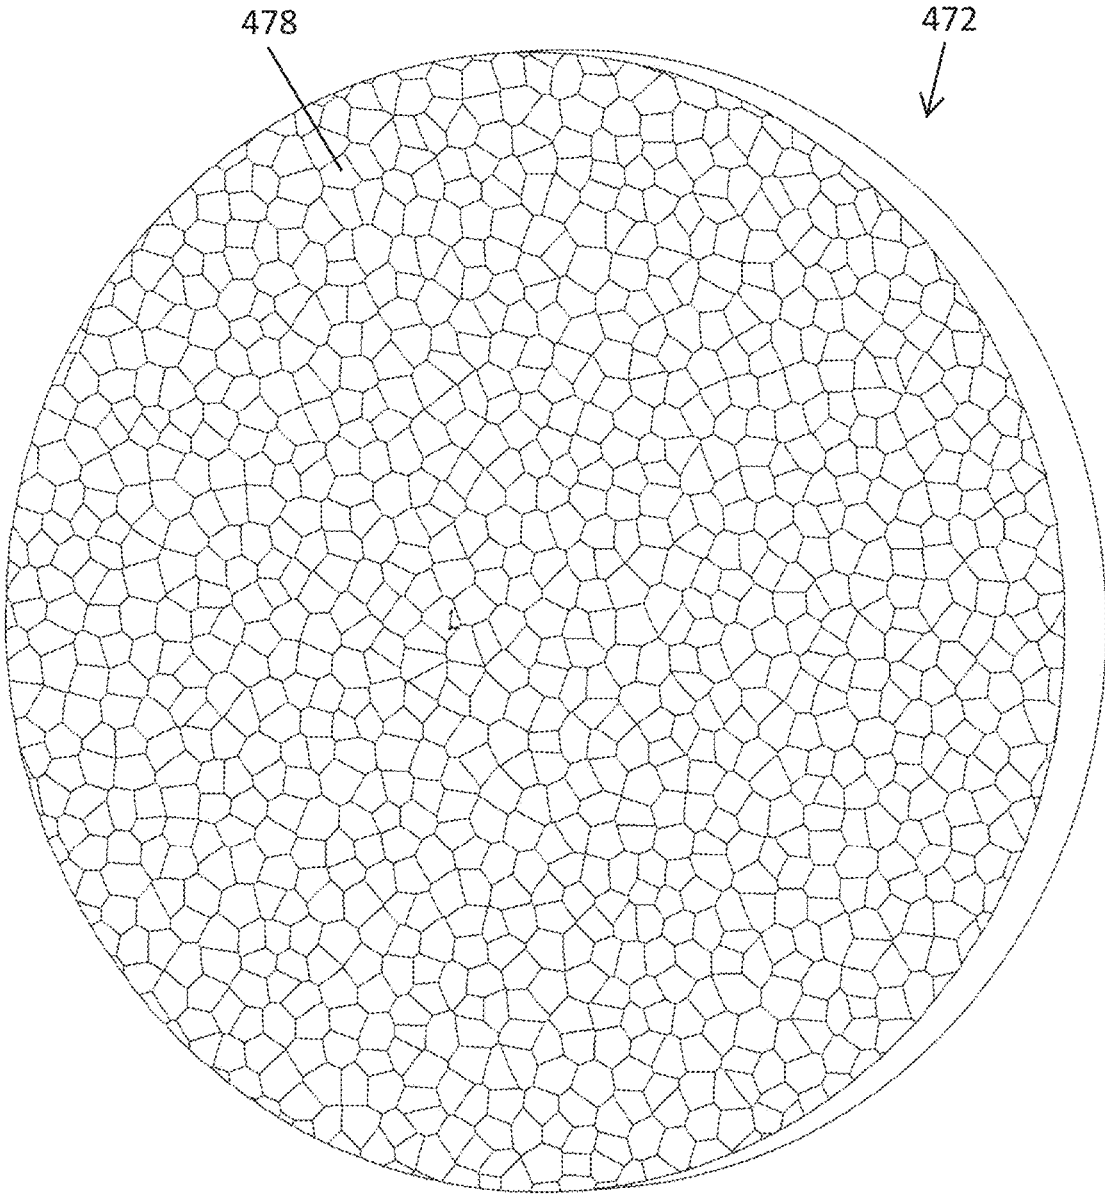


FIG. 21

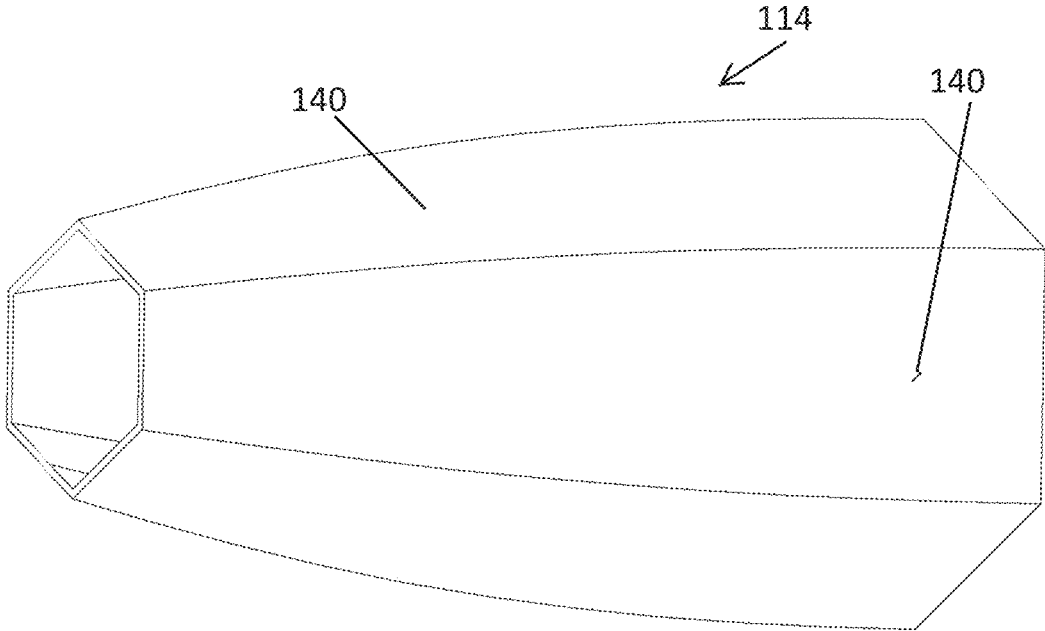


FIG. 22

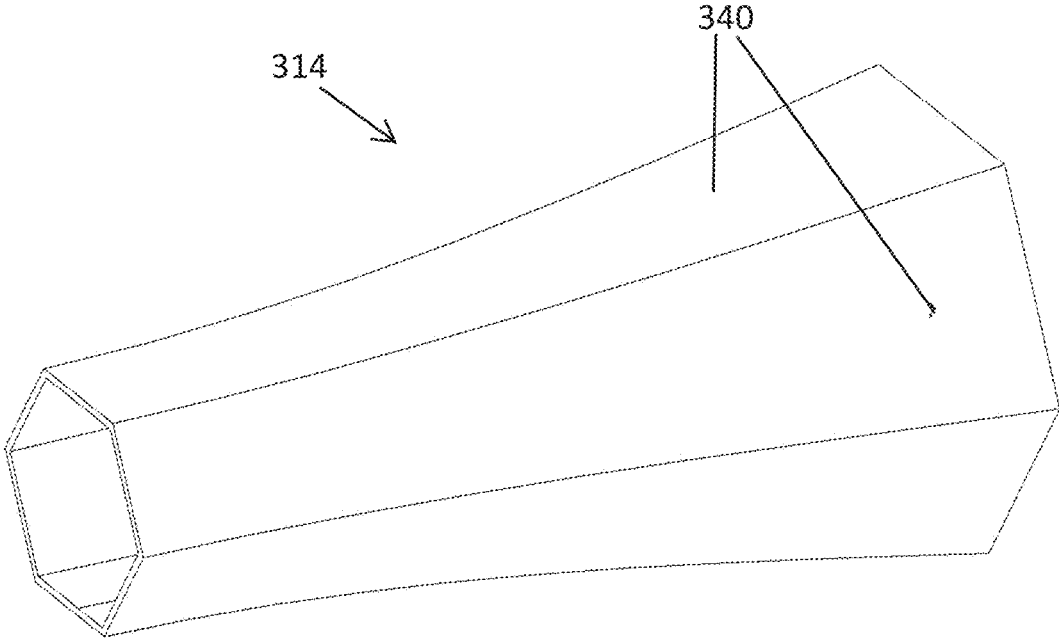


FIG. 23

LIGHTING FIXTURE

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 16/587,176, filed Sep. 30, 2019, which claims priority to U.S. Provisional Patent Application No. 62/740,010, filed Oct. 2, 2018, the entire contents all of which are hereby incorporated by reference herein.

BACKGROUND

The present invention relates to lighting fixtures and more particularly to lighting fixtures that utilize light emitting diodes or LEDs.

SUMMARY

In one embodiment, the invention provides a lighting fixture including a light source including an array of light emitting diodes (LEDs) and a reflector including an input end adjacent the array of LEDs and an output end opposite the input end such that the light source emits light through the reflector from the input end through the output end. The reflector further includes a first, a second, a third, and a fourth sidewall that extend from the input end to the output end. The first and the second sidewalls each including an interior surface, the third and the fourth sidewalls each include an interior surface having a reflectivity that is more diffuse than the interior surfaces of the first and second sidewalls. A lens is adjacent the output end of the reflector.

In another embodiment, the invention provides a lighting fixture including a light source including an array of light emitting diodes (LEDs) and a reflector having an input end adjacent the array of LEDs and an output end opposite the input end such that the light source emits light through the reflector from the input end through the output end. A tandem lens array is adjacent the output end of the reflector.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded view of a portion of the lighting fixture of FIG. 14.

FIG. 2 is an alternative exploded view of the lighting fixture of FIG. 1.

FIG. 3 is an alternative exploded view of the lighting fixture of FIG. 1.

FIG. 4 is a cross-sectional exploded view of the lighting fixture of FIG. 3 taking along line B-B in FIG. 3.

FIG. 5 is a perspective view of an LED array of the lighting fixture of FIG. 1.

FIG. 6 illustrates an LED color arrangement of the LED array of FIG. 5.

FIG. 7 is an exploded view of the lighting fixture of FIG. 1 illustrating color mixing and collimation of the LED array of FIG. 5.

FIG. 8 illustrates a surface finish of a reflector of the lighting fixture of FIG. 1.

FIG. 9 illustrates a reflector according to another embodiment of the invention.

FIGS. 10A-10C illustrate possible arrangements of surface finishes of the reflector of the lighting fixture of FIG. 1.

FIG. 11 illustrates a reflector according to another embodiment of the invention.

FIG. 12 illustrates a possible arrangement of surface finishes of the reflector of FIG. 11.

FIGS. 13A and 13B illustrate possible arrangements of surfaces finishes of a reflector according to another embodiment of the invention.

FIG. 14 is a perspective view of a lighting fixture according to an embodiment of the invention.

FIG. 15 is a partially exploded view of the lighting fixture of FIG. 14.

FIG. 16 is a perspective view of a tandem lens array according to one embodiment.

FIG. 17 is a cross-sectional view of the lens of FIG. 16 taken along lines 17-17 of FIG. 16.

FIG. 18 is an enlarged portion of FIG. 17.

FIG. 19 is a perspective view of a tandem lens array according to another embodiment.

FIG. 20 is a perspective view of a tandem lens array according to another embodiment.

FIG. 21 is a perspective view of a tandem lens array according to another embodiment.

FIG. 22 is a perspective view of a reflector according to another embodiment.

FIG. 23 is a perspective view of a reflector according to another embodiment.

DETAILED DESCRIPTION

Before any embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the following drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways.

FIG. 14 illustrates a lighting fixture or luminaire 10 having a housing 11. Referring to FIGS. 1-4, within the housing 11, the lighting fixture 10 includes a light source 12, a light pipe or reflector 14, and lenses 16. The lighting fixture 10 is particularly suited for use during live performances, including theater productions, concerts, television or movie studio productions, and the like.

Referring to FIGS. 5 and 6, the light source 12 includes an array 20 of light-emitting diodes (LEDs). In the illustrated embodiment, the array 20 of LEDs is in the shape of a hexagon, which generally matches or corresponds to the cross-sectional shape of the reflector 14. The illustrated array 20 includes 52 individual Luxeon C LEDs spaced closely together producing about 10,000 lumens. The array 20 comprises red 26, lime 24, green 30, and indigo 28 color LEDs. A ring of green 30 and lime 24 LEDs are arranged around the outside perimeter of the array 20. A ring of red LEDs 26 in a hexagon shape is immediately inward from the row of green 30 and lime 24 LEDs. Inside the row of red LEDs 26 are two clusters of indigo LEDs 28 with two green LEDs 30 between the clusters of indigo LEDs 28 inside the row of red LEDs 26. The illustrated array 20 includes 12 indigo LEDs, 8 green LEDs, 16 lime LEDs, and 16 red LEDs in the arrangement illustrated in FIG. 6. In some embodiments, the array 20 includes from 10 to 20 red LEDs, from 10 to 20 lime LEDs, from 5 to 12 green LEDs, and from 8 to 16 indigo LEDs.

The light pipe or reflector 14 includes a first or input end 34 adjacent the array 20 of LEDs and a second or output end 36 opposite the first end 34. The illustrated reflector 14 includes six sidewalls 40a-40f that extend from the first end 34 to the second end 36. The six sidewalls 40a-40f are arranged to define the reflector 14 having a hexagonal cross-sectional area. The sidewalls 40a-40f each include an inwardly facing interior surface 42 and an outwardly facing

exterior surface 44. The reflector 14 is tapered such that a distance 46 (see FIG. 5) between the interior surfaces 42 of opposite sidewalls 40a-40f increases in a direction going from the first end 34 of the reflector 14 to the second end 36. At the first end 34, the distance 46 is the smallest and at the second end 36, the distance 46 is the greatest. In one embodiment, the distance 46 at the second end 36 is in a range from about 3 to about 5 times the distance 46 at the first end 34. It has been found that enhanced collimation of the array 20 is obtained when the distance 46 at the second end 36 is in a range from about 3 to about 5 times the distance 46 at the first end 34.

At the first end 34, the distance 46 is about the same as a corresponding width of the array 20 of LEDs to minimize any gap 48 (FIG. 5) between the array 20 and the sidewalls 40a-40f. The reflector 14 is tapered, which collimates light bouncing off the sidewalls 40a-40f from the array 20 of LEDs as shown in FIG. 7. In the embodiment illustrated in FIGS. 1-7, the taper of the sidewalls 40a-40f is straight or linear between the first end 34 and the second end 36. Referring to FIG. 3, a longitudinal axis 50 of the reflector 14 is defined as an axis that extends centrally through the first end 34 and the second end 36 of the reflector 14. The sidewalls 40a-40f are tapered at an angle 52 (FIG. 4) relative to the axis 50. In one embodiment, the angle 52 is in a range from about 10 degrees to about 20 degrees. It has been found that enhanced collimation of the array 20 is obtained when the angle 52 is in a range from about 10 degrees to about 20 degrees.

With continued reference to FIG. 3, a length 54 of the reflector is defined as the distance from the first end 34 to the second end 36 measured along the axis 50. In one embodiment, the length 54 is about 7.5 times the distance 46 at the first end 34 and the distance 46 at the second end 36 is about 4 to 5 times the distance 46 at the first end 34 with the angle 53 of the sidewalls 40a-40f in a range from about 8 to about 14 degrees. It has been found that the reflector 14 with these relative dimensions provides good collimation of the array 20.

FIGS. 8-10C illustrate surface feature configurations of the interior surfaces 42 of the sidewalls 40a-40f of the reflector 14. In one embodiment, some of the sidewalls 40a-40f have an interior surface 42 that is specular while some of the sidewalls 40a-40f have an interior surface 42 that includes a diffusing structure. The diffusing structure aids in color mixing. For example, FIG. 8 illustrates an example of such a diffusing structure on an aluminum surface having a grain, and called a mill finish. The diffusing grain extends or is aligned along the longitudinal axis 50 of the reflector 14. Aligning the grain parallel to the longitudinal axis 50 causes a variation in the azimuthal angle of light reflected from the surface. This improves color mixing while minimizing lumen loss caused by the diffusion. In other embodiments, other types of diffusing structures can be utilized on the interior surfaces 42 of the sidewalls 40a-40f, including other types of milled or embossed structures. In one embodiment, the diffusing structures have a diffuse reflection value in a range from about 80% to about 90%. The specular interior surfaces 42 of some of the sidewalls 40a-40f can be made from silver coated aluminum. In other embodiments, other suitable materials can be used, including glass, plastic, and/or other types of aluminum.

In one embodiment, half of the sidewalls 40a-40f include an interior surface 42 with a diffusing structure and half of the sidewalls 40a-40f include an interior surface 42 that is specular. This arrangement has been found to provide good

color mixing of the array 20 with reduced lumen loss. FIG. 10A-10C illustrate possible configurations of the interior surfaces 42. In the embodiment of FIGS. 10A and 10B, the interior surfaces 42S include specular interior surfaces 42 and the interior surfaces 42D including interior surfaces 42 with a diffusing structure. The interior surfaces 42D with a diffusing structure, which may be the same or a different diffusing structure, have a reflectivity that is more diffuse than the specular interior surfaces 42S. In the embodiment of FIG. 10A, the specular interior surfaces 42S alternate with diffusing interior surfaces 42D. In the embodiment of FIG. 10B, one side of the reflector 14 includes specular interior surfaces 42S while the opposite side includes diffusing interior surfaces 42D. The reflector 14 in the embodiment of FIG. 10C includes interior surfaces with three different finishes; specular interior surfaces 42S, diffusing interior surfaces 42D, and interior surfaces 42SD with a different interior surface finish. For example, diffusing interior surfaces 42D have a reflectivity that is most diffuse, specular interior surfaces 42S have a reflectivity that is least diffuse, and the interior surfaces 42SD have a reflectivity with a diffuseness that is between 42D and 42S.

FIGS. 11 and 22 illustrate a reflector 114 according to another embodiment that may be used with the lighting fixture 10 in place of the reflector 14. The reflector 114 has sidewalls 140 that are curved and parabolic in the illustrated embodiment. FIGS. 9 and 23 illustrate a reflector 314 according to yet another embodiment. The reflector 314 is generally trumpet shaped with sidewalls 340 that are curved and parabolic in the illustrated embodiment. Also, the cross-sectional shape of the reflectors 114, 314 can be circular, elliptical, or a polygon. The reflectors 114, 314 can also include portions of the interior surface(s) of the sidewall(s) 140, 340 with some surfaces that are specular and some surfaces that include a diffusing structure. FIG. 12 illustrates a possible interior surface configuration for the reflectors 114, 314 of FIGS. 9 and 11. As represented by FIG. 12, about one half of the sidewalls 140, 340 include the specular interior surface 42S while the other half of the sidewalls 140, 340 includes the diffusing interior surface 42D.

Although the reflectors 14, 114, and 314 of FIGS. 10A-10C include six sidewalls 40a-40f, in other embodiments the reflector may have more than six sidewalls or less than six sidewalls. For example, FIGS. 13A-13B illustrate a reflector 214 that includes four sidewalls 240a-240d. In the embodiment of FIG. 13A, the sidewalls 240b and 240d have interior surfaces 42D that include a diffusing structure and the sidewalls 240a and 240c have interior surfaces 42S that include a specular surface. In the embodiment of FIG. 13B, the adjacent sidewalls 240a and 240d on one side of the reflector 214 include interior surfaces 42S that include a specular surface and the adjacent sidewalls 240b and 240c on the opposite side include interior surfaces 42D that include the diffusing structure.

Referring to FIG. 1, in some embodiments, the sidewalls 40a-40f can be constructed from folded metal or from individual metal pieces that are tabbed, welded, or fixed with adhesive to the inside of a ridged housing to form the reflector 14. In other embodiments, the reflector 14 could also be made from glass or plastic with portions of the reflector having a molded pattern or a finish created by sand-blasting or etching.

Referring to FIG. 2, the lighting fixture further includes an effects module 60. The illustrated effects module 60 includes a first gobo wheel 62, a second gobo wheel 64, and an iris 66. The gobo wheel 64 includes gates 68 that each have a diameter or inner dimension 70. In one embodiment, design

for the dimension of the reflector **14** starts with the gate dimension **70**. In one embodiment, the distance **46** at the second end **36** of the reflector **14** is in a range from about 1.3 to about 1.4 times the gate dimension **70**. Then, as discussed in the example above, the length **54** of the reflector **14** is about 7.5 times the distance **46** at the first end **34** and the distance **46** at the second end **36** is about 4 to 5 times the distance **46** at the first end **34** with the angle **53** of the sidewalls **40a-40f** in a range from about 8 to about 14 degrees. These dimensions provide good color mixing of the array **20**.

Referring to FIGS. **3-4**, the lenses **16** include a field lens **72** and zoom projection lenses **74**. In one embodiment, the zoom projection lenses **74** provide an achromatic design with a 3:1 zoom. The zoom projection lenses **74** project the gobo or iris onto a wall or screen. The field lens **72** adjusts the angle of the light received from the reflector **14** and the light source **12** to match the gates **68** and zoom optics **74**. The illustrated lighting fixture **10** also includes diffusion media **76** that can pivot into and out of the light path to diffuse light from the lighting fixture **10**.

FIGS. **16** and **17** illustrate a lens **172**, which is a tandem lens array that can be used in a light fixture according to another embodiment. The tandem lens array **172** is hexagonal and can be positioned adjacent or within the second end **36** of the hexagonal reflector **14** in place of the lens **72** of FIG. **4**. In such an embodiment, the light fixture may not include the zoom projection lenses **74**. Rather, the light fixture can include a Fresnel lens moveable along the longitudinal axis **50** to alter the beam angle of the light beam from the lighting fixture. In other embodiments, the tandem lens array **172** may have other suitable shapes to match the shape of the second end of the reflector. Generally, all of the light emitted from the reflector **14** passes through the tandem lens array **172**. In one embodiment of the light fixture including the tandem lens array **174**, the reflector **14** does not include the interior sidewalls with a diffusing structure described above. Rather, all of the interior surfaces of the reflector are highly specular because color mixing is enhanced by the tandem lens array **172**. The tandem lens array **172** is particularly suited for use in a wash beam type light fixture.

The tandem lens array **172** is a single substrate in one embodiment that includes a first side **174** that faces toward the array **20** of LEDs and a second side **176** that is opposite the first side **172**. The first side **174** includes an array of approximately semi-sphere shaped lenses **178** arranged in a repeating pattern. The second side **176** includes the same array of approximately semi-sphere shaped lenses **178**. The lenses **178** are approximately semi-sphere shaped because the lenses **178** have an F-number that is about 1.159 in the illustrated embodiment. An F-number of 1.0 would correspond to lenses that are an exact or precise semi-sphere shape. In other embodiments, the pattern of lenses may be randomized rather than repeating. The tandem lens array **172** breaks up the light after it has been mixed and collimated in the reflector **14** into multiple overlapping beams, or Kohler illuminators, which further mixes the light to a better uniformity.

Referring to FIG. **18**, in the illustrated embodiment, the lenses **178** on the first side **174** have corresponding lenses **178** (or matching pair) on the second side **176** with a common axis **179** that extends centrally through the corresponding lenses **178**. A lens pair **178a** and **178b** from sides **174**, **176** are labeled in FIG. **18** having the common axis **179**. In one embodiment, the lenses **178** having a radius of curvature **180** (FIG. **18**) that is about 1.6 mm and the lens

172 has a thickness **182** measured from the first side **174** to the second side **176** that is about 5 mm. In such an embodiment, the numerical aperture of the pair of lenses **178a**, **178b** is about 0.43 with an F-number that is about 1.159. The tandem lens array **172** can be used in a light fixture having about 44 multicolor LEDs with an array maximum diameter **46** (FIG. **5**) that is about 19.5 mm. The light fixture can also include a hexagonal reflector **14** with a maximum diameter at the input end **34** that is about 21 mm. It has been found that in the example lens **172** and light fixture described in this paragraph, a reflector **14** with a taper angle **52** (FIG. **4**) between about 5 degrees and 20 degrees is preferred for adequate color mixing of the multi-color LEDs. A reflector length (i.e., distance from input end **34** to output end **36** (FIG. **4**)) indicated in the chart below has been found to be preferred for each of the indicated angles **52** to provide the maximal possible optical efficiency, about 80 percent or more. The reflector length for all angles **52** listed can be significantly shorter if slightly lower efficiencies (e.g., from about 60 percent to about 75 percent) are acceptable. For example, if 60 percent optical efficiency is desired or acceptable, at 5 degrees the length is about 150 mm, at 10 degrees the length is about 75 mm, at 15 degrees the length is about 65 mm, at 20 degrees the length is about 50 mm. The reflector length and angle **52** then provide the maximum diameter of the output **36** shown in the chart. The tandem lens array **172** has been found to reduce the length of the reflector needed for adequate color mixing of the multi-color LEDs.

Angle 52 (degrees)	Length of Reflector (mm)	Max Diameter Output End 36 (mm)
5	200	56
10	150	74
15	110	80
20	95	90

FIG. **19** illustrates a tandem lens array **272** according to another embodiment that can be used in place of the tandem lens array **172** described above. The tandem lens array **272** includes individual lenses **278** that have an outer perimeter in the shape of a circle rather than hexagon. The lenses **278** form a repeating hexagonal pattern. FIG. **20** illustrates another embodiment of a tandem lens array **372**. The tandem lens array **372** includes lenses **378** arranged in a circular pattern around a center **373** of the tandem lens array **372**. FIG. **21** illustrates a tandem lens array **472** according to yet another embodiment. The tandem lens array includes lenses **478** that have a randomly shaped arrangement.

What is claimed is:

1. A lighting fixture comprising:

a light source including a multi-color array of light emitting diodes (LEDs) including at least one LED configured to project light of a first color and at least one LED configured to project light of a second color; a reflector having

an input end adjacent the array of LEDs, the input end receiving light of the first color and light of the second color,

an output end opposite the input end such that light of the first color and light of the second color are received through the input end and travel through the reflector from the input end through the output end, thereby mixing light of the first color and light of the second color, and

- at least one sidewall, each sidewall extending in a straight line between the input end and the output end; and
- a tandem lens array adjacent the output end of the reflector, and
- wherein the tandem lens array includes a first side that faces toward the array of LEDs and a second side that is opposite the first side, wherein the first side includes an array of lenses and the second side includes an array of lenses.
- 2. The lighting fixture of claim 1, wherein the reflector has a hexagonal cross-section.
- 3. The lighting fixture of claim 1, wherein the array of lenses on the first side includes an array of approximately semi-sphere shaped lenses.
- 4. The lighting fixture of claim 3, wherein the array of lenses on the second side includes an array of approximately semi-sphere shaped lenses.
- 5. The lighting fixture of claim 3, wherein the array of approximately semi-sphere shaped lenses is arranged in a repeating pattern.
- 6. The lighting fixture of claim 3, wherein the array of approximately semi-sphere shaped lenses is arranged in a randomized pattern.
- 7. The lighting fixture of claim 1, wherein the lenses on the first side have corresponding lenses on the second side with a common axis that extends centrally through the corresponding lenses.
- 8. The lighting fixture of claim 1, wherein the lenses on the first side form a repeating hexagonal pattern.
- 9. The lighting fixture of claim 1, wherein the lenses on the first side are arranged in a circular pattern around a center of the tandem lens array.
- 10. The lighting fixture of claim 1, wherein the reflector includes a longitudinal axis that extends centrally through the input end and the output end, the lighting fixture further comprising a Fresnel lens moveable along the longitudinal axis to alter a beam angle of a light beam from the lighting fixture.
- 11. The lighting fixture of claim 1, wherein the at least one sidewall of the reflector further includes a first, a second, a third, and a fourth sidewall that extend from the input end to the output end, and the first, the second, the third, and the fourth sidewalls each includes an interior surface that is specular.
- 12. The lighting fixture of claim 1, wherein the reflector includes a taper angle between about 5 degrees and 20 degrees.
- 13. The lighting fixture of claim 1, wherein the array of LEDs is disposed within a perimeter of the input end of the reflector.

- 14. The lighting fixture of claim 1, wherein the array of lenses on the first side of the tandem lens array is disposed within a perimeter of the output end of the reflector.
- 15. A lighting fixture comprising:
 - a light source including an array of light emitting diodes (LEDs);
 - a reflector having
 - an input end adjacent the array of LEDs that receives light from a plurality of LEDs of the array of LEDs,
 - an output end opposite the input end such that light is received through the input end from the plurality of LEDs and travels through the reflector from the input end through the output end, and
 - a plurality of sidewalls, each sidewall extending in a straight line between the input end and the output end, the plurality of sidewalls forming a hexagonal cross-section defined between the input end and the output end
 - a tandem lens array adjacent the output end of the reflector, and
 - wherein the tandem lens array includes a first side that faces toward the array of LEDs and a second side that is opposite the first side, wherein the first side includes an array of lenses and the second side includes an array of lenses.
- 16. The lighting fixture of claim 15, wherein the array of LEDs is disposed within a perimeter of the input end of the reflector, and the input end of the reflector receives light from an entirety of the array of LEDs.
- 17. The lighting fixture of claim 15, wherein the array of lenses on the first side of the tandem lens array is disposed within a perimeter of the output end of the reflector.
- 18. The lighting fixture of claim 15, wherein
 - the array of lenses on the first side of the tandem lens array includes an array of approximately semi-sphere shaped lenses,
 - the array of lenses on the second side of the tandem lens array includes an array of approximately semi-sphere shaped lenses, and
 - the lenses on the first side of the tandem lens array have corresponding lenses on the second side of the tandem lens array with a common axis that extends centrally through the corresponding lenses.
- 19. The lighting fixture of claim 15, wherein the reflector includes a longitudinal axis that extends centrally through the input end and the output end, the lighting fixture further comprising a Fresnel lens moveable along the longitudinal axis to alter a beam angle of a light beam from the lighting fixture.
- 20. The lighting fixture of claim 15, wherein the reflector is a single reflector configured to receive light from all LEDs of the array of LEDs.

* * * * *