



(12) **United States Patent**
Weir et al.

(10) **Patent No.:** **US 11,433,417 B2**
(45) **Date of Patent:** **Sep. 6, 2022**

(54) **WATER-BASED PYROTECHNIC ILLUSION**

10/04 (2013.01); *F2IS 10/06* (2013.01); *F2IV 23/0435* (2013.01); *A63J 5/023* (2013.01); *F21W 2121/02* (2013.01)

(71) Applicant: **Royal Caribbean Cruises Ltd.**, Miami, FL (US)

(58) **Field of Classification Search**

CPC ... *F21W 2121/02*; *F21S 10/002*; *B05B 3/027*; *B05B 3/028*; *B05B 3/06*
USPC 362/96
See application file for complete search history.

(72) Inventors: **Nicholas Weir**, Davie, FL (US); **Steven Michelman**, Las Vegas, NV (US); **Daniel Comins**, Las Vegas, NV (US); **Zachary Cook**, Las Vegas, NV (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(73) Assignee: **Royal Caribbean Cruises Ltd.**, Miami, FL (US)

1,929,825 A * 10/1933 Requa *B05B 3/06*
239/19
1,982,315 A * 11/1934 Lundberg *F21V 33/006*
290/54

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 107 days.

(Continued)

(21) Appl. No.: **17/099,528**

FOREIGN PATENT DOCUMENTS

(22) Filed: **Nov. 16, 2020**

WO WO 2017/117296 7/2017

(65) **Prior Publication Data**

US 2021/0146396 A1 May 20, 2021

OTHER PUBLICATIONS

Extended European Search Report in European App. No. EP 20208441.4 dated Mar. 22, 2021 (8 pgs).

Related U.S. Application Data

Primary Examiner — Alexander K Garlen

(60) Provisional application No. 62/937,682, filed on Nov. 19, 2019.

(74) *Attorney, Agent, or Firm* — Knobbe Martens Olson & Bear LLP

(51) **Int. Cl.**

(57) **ABSTRACT**

B05B 17/08 (2006.01)
F21S 9/02 (2006.01)
F21S 10/00 (2006.01)
F21S 10/04 (2006.01)
F21S 10/06 (2006.01)
F2IV 23/04 (2006.01)
B05B 3/06 (2006.01)
B05B 3/02 (2006.01)


Systems and methods for firework water illusions are disclosed. In one aspect, a device for creating an illusion of rotary pyrotechnics includes at least one nozzle configured to rotate about an axis of the device and spray water in a radial direction while rotating. The device can also include a water supply configured to provide the water to the at least one nozzle and a lighting system configured to illuminate the water sprayed from the at least one nozzle to create an illusion of rotary pyrotechnics.

(Continued)

(52) **U.S. Cl.**

CPC *B05B 17/08* (2013.01); *B05B 3/02* (2013.01); *B05B 3/06* (2013.01); *F21S 9/02* (2013.01); *F21S 10/002* (2013.01); *F21S*

29 Claims, 15 Drawing Sheets
(1 of 15 Drawing Sheet(s) Filed in Color)

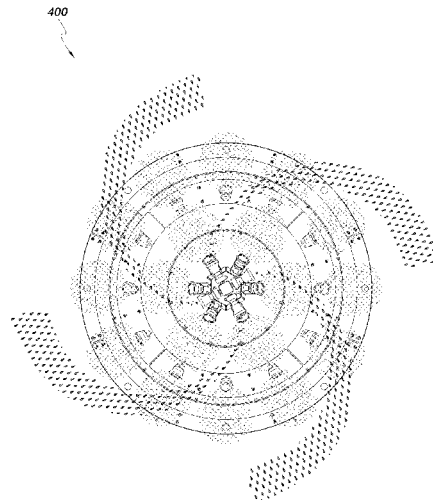

- (51) **Int. Cl.**
A63J 5/02 (2006.01)
F21W 121/02 (2006.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,883,113 A * 4/1959 Horvath B05B 3/06
188/293
2003/0168523 A1 * 9/2003 Lin B05B 3/06
239/251
2011/0132993 A1 6/2011 Wiseman et al.
2019/0060944 A1 * 2/2019 Fuller B05B 1/12
2019/0143238 A1 * 5/2019 Lunde F21S 10/04
392/397
2019/0143240 A1 * 5/2019 Lunde A63J 25/00
392/397

* cited by examiner

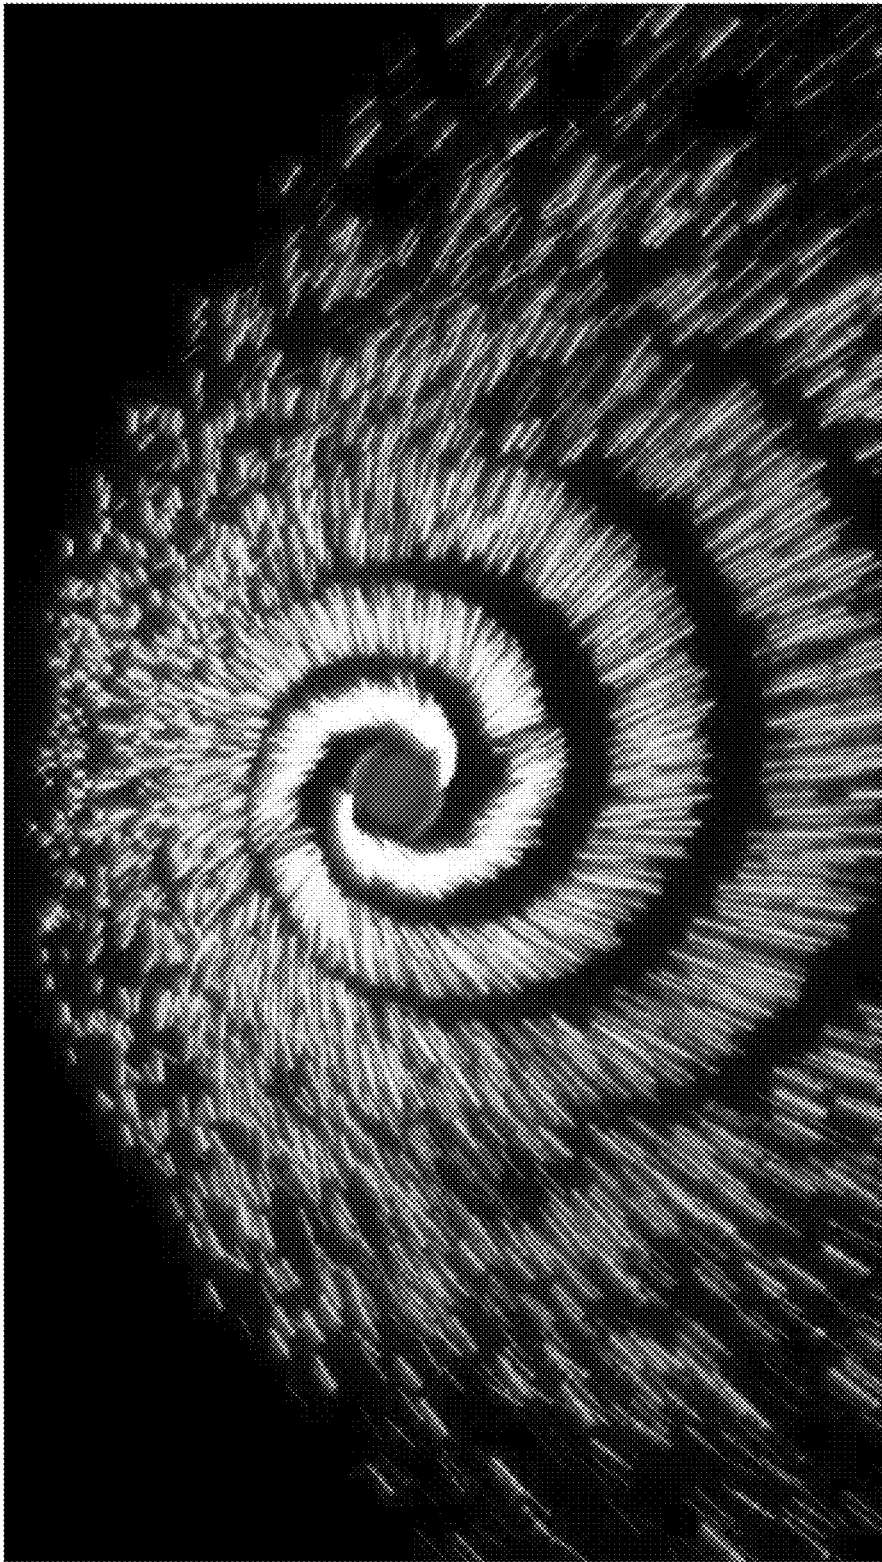


FIG. 1

100

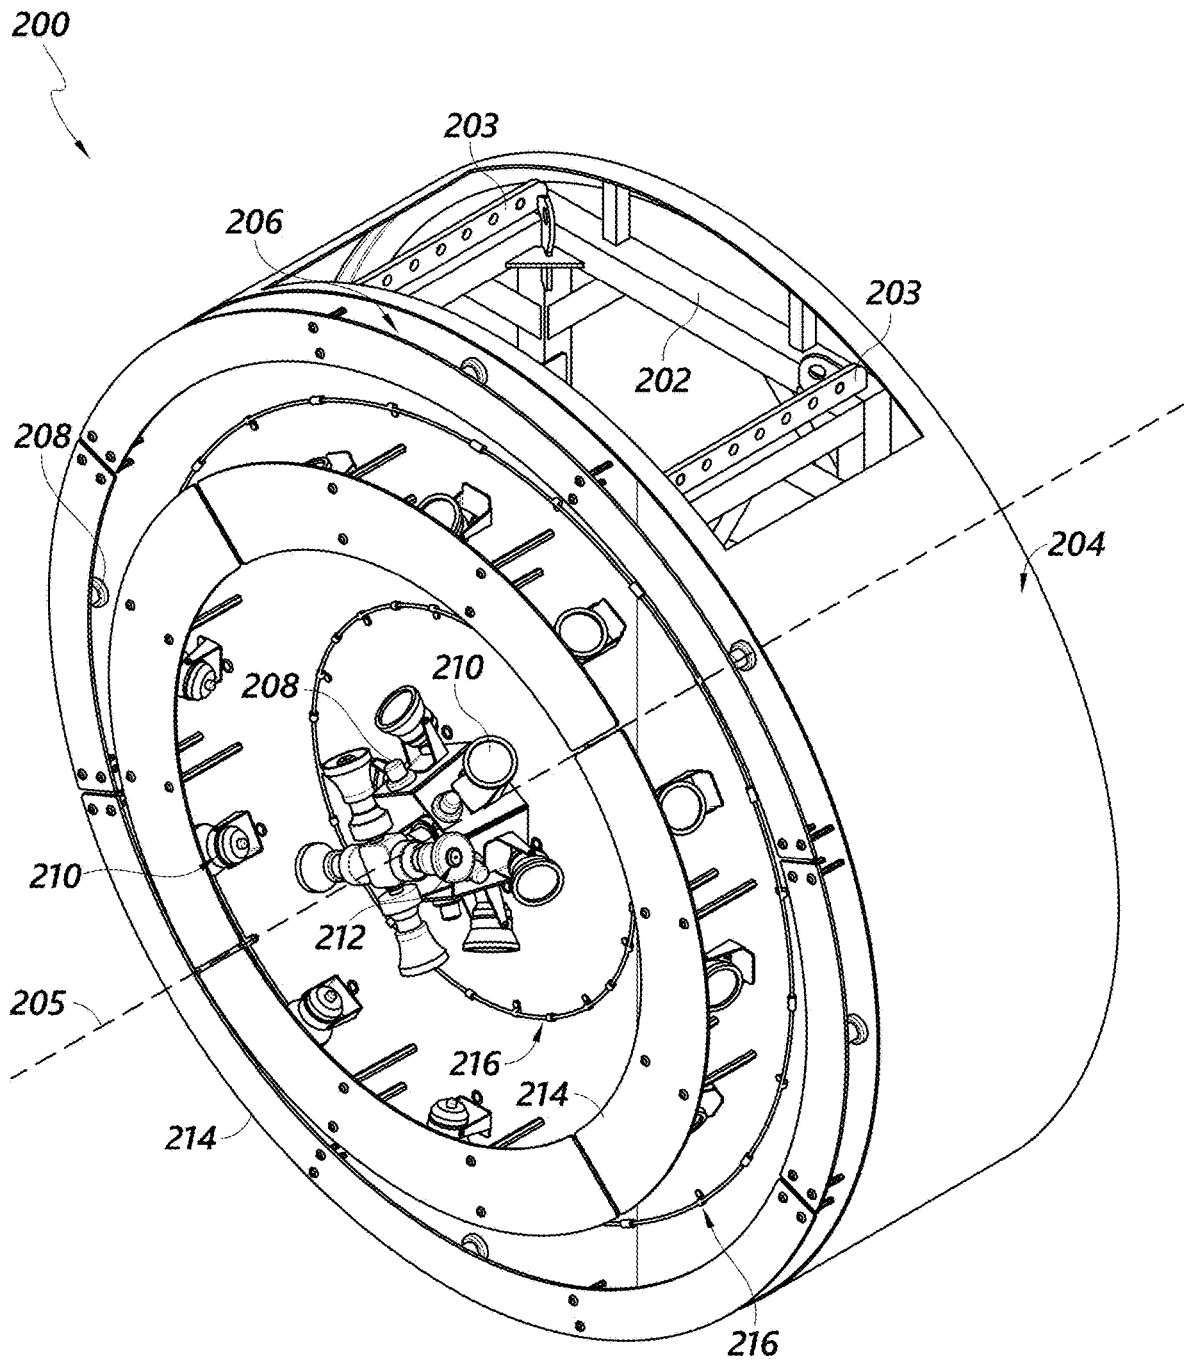


FIG. 2A

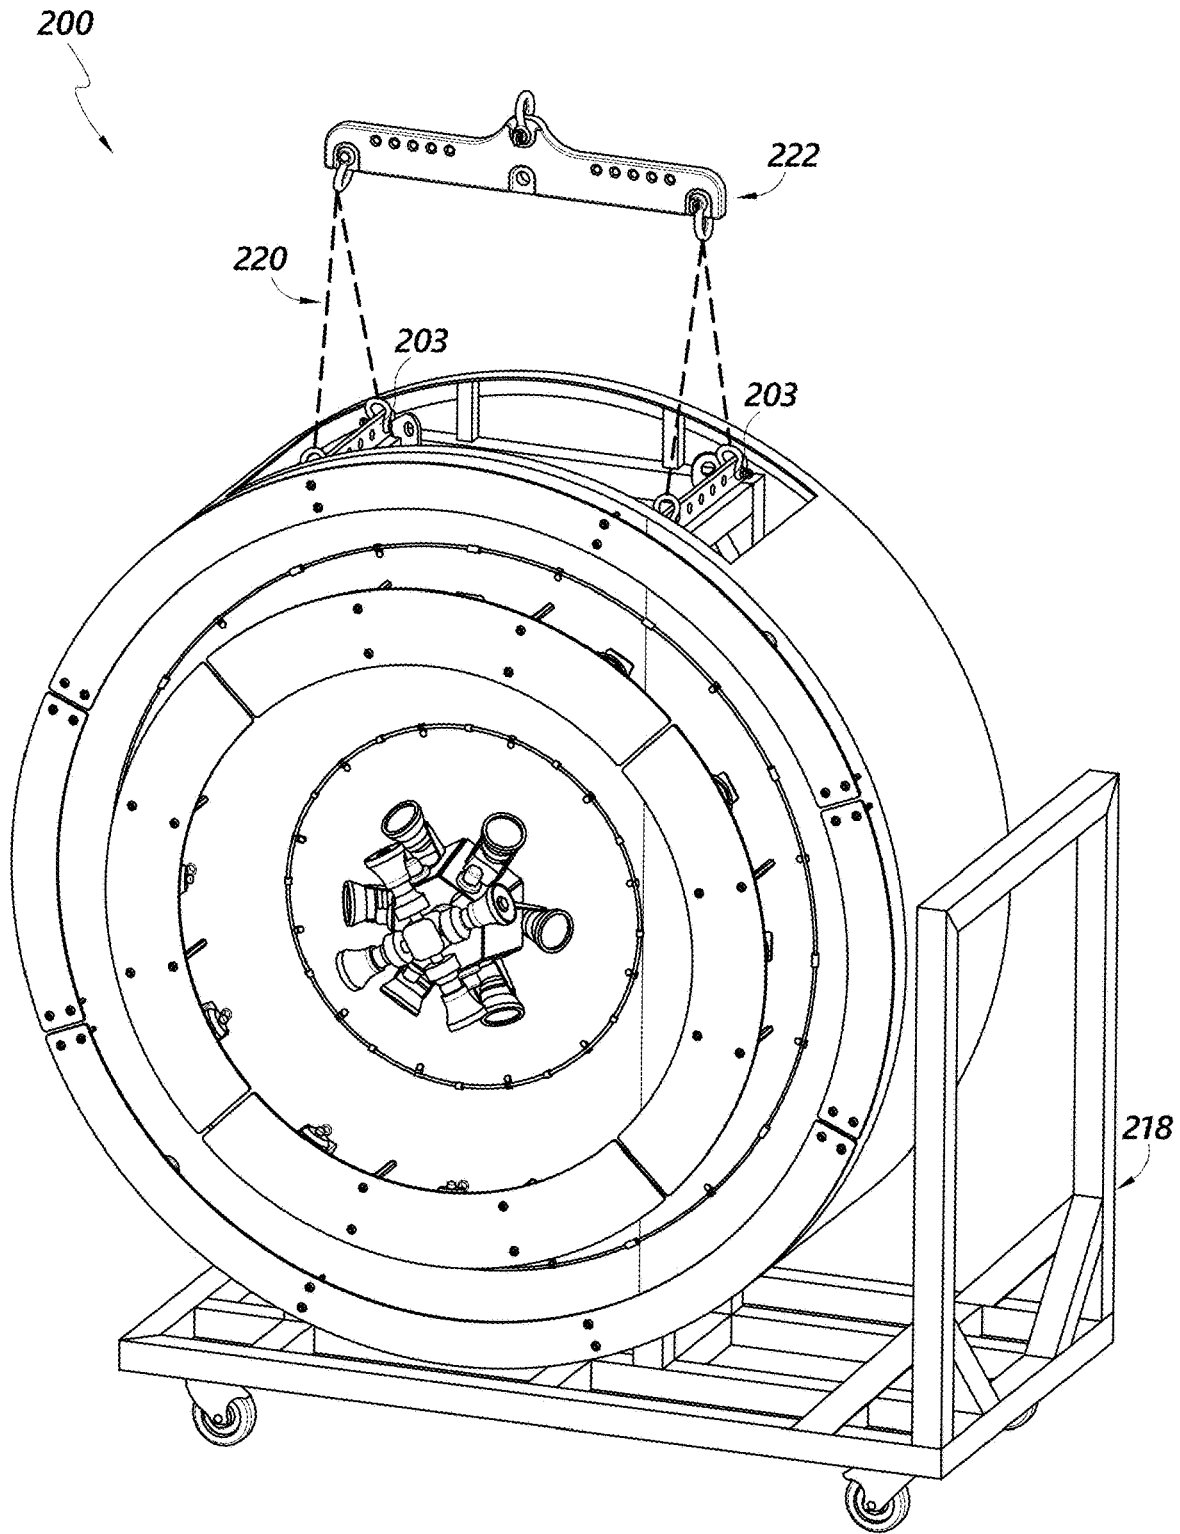


FIG. 2B

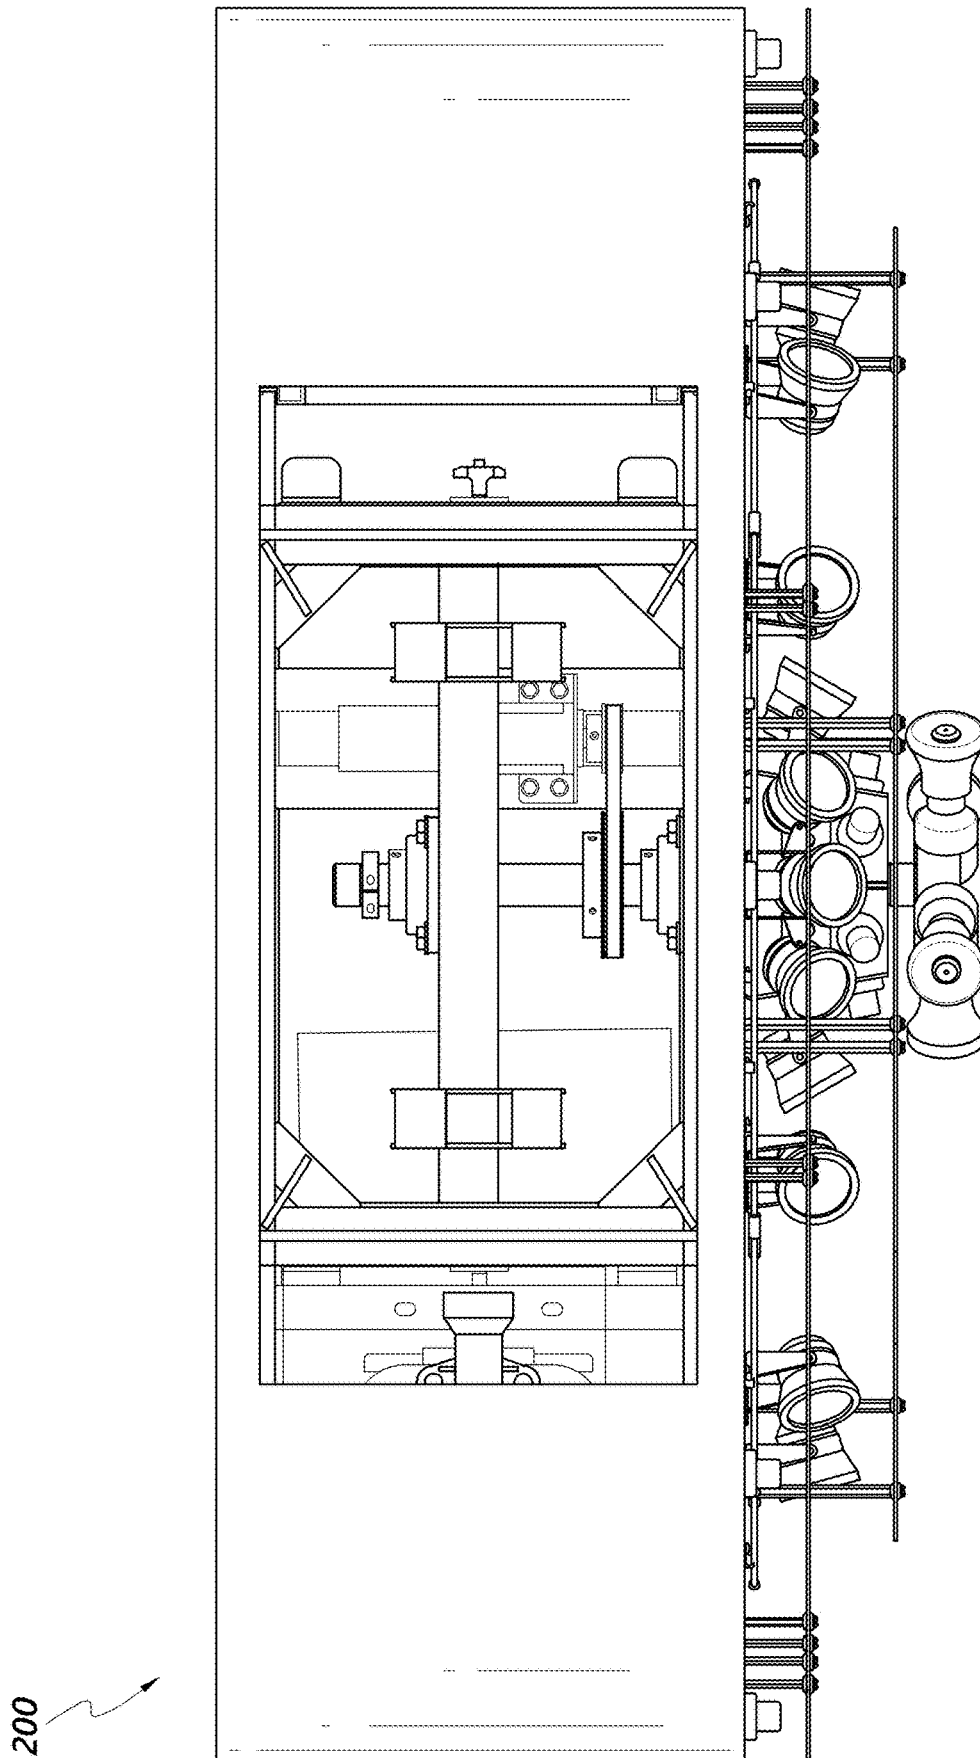


FIG. 3A

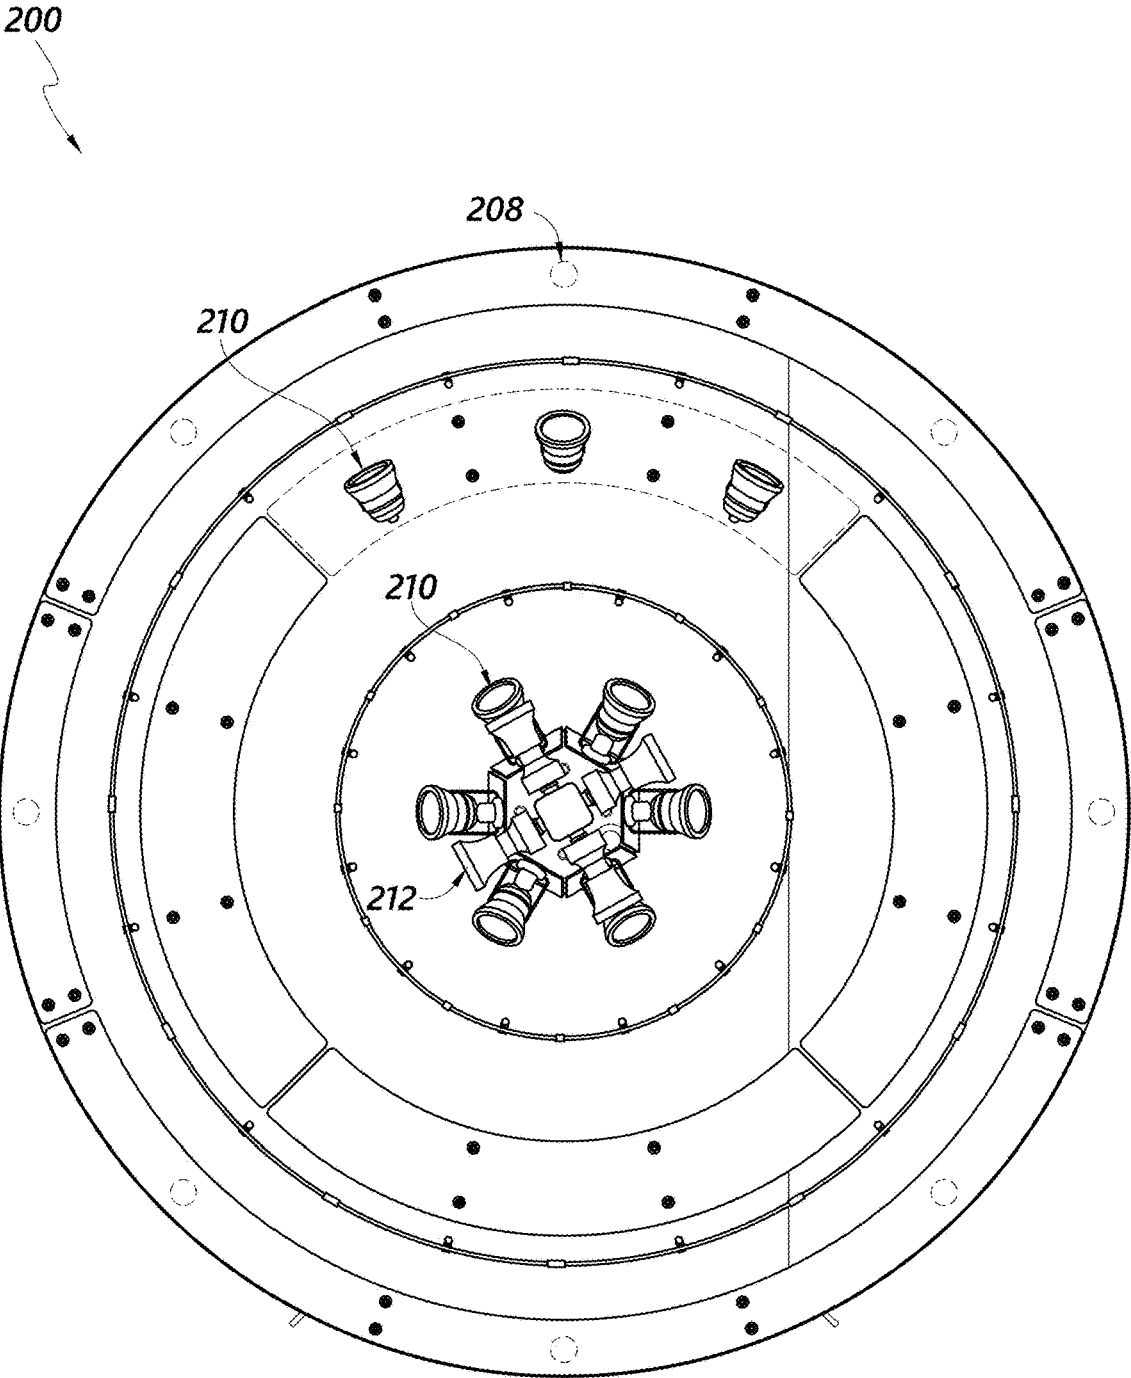


FIG. 3B

200

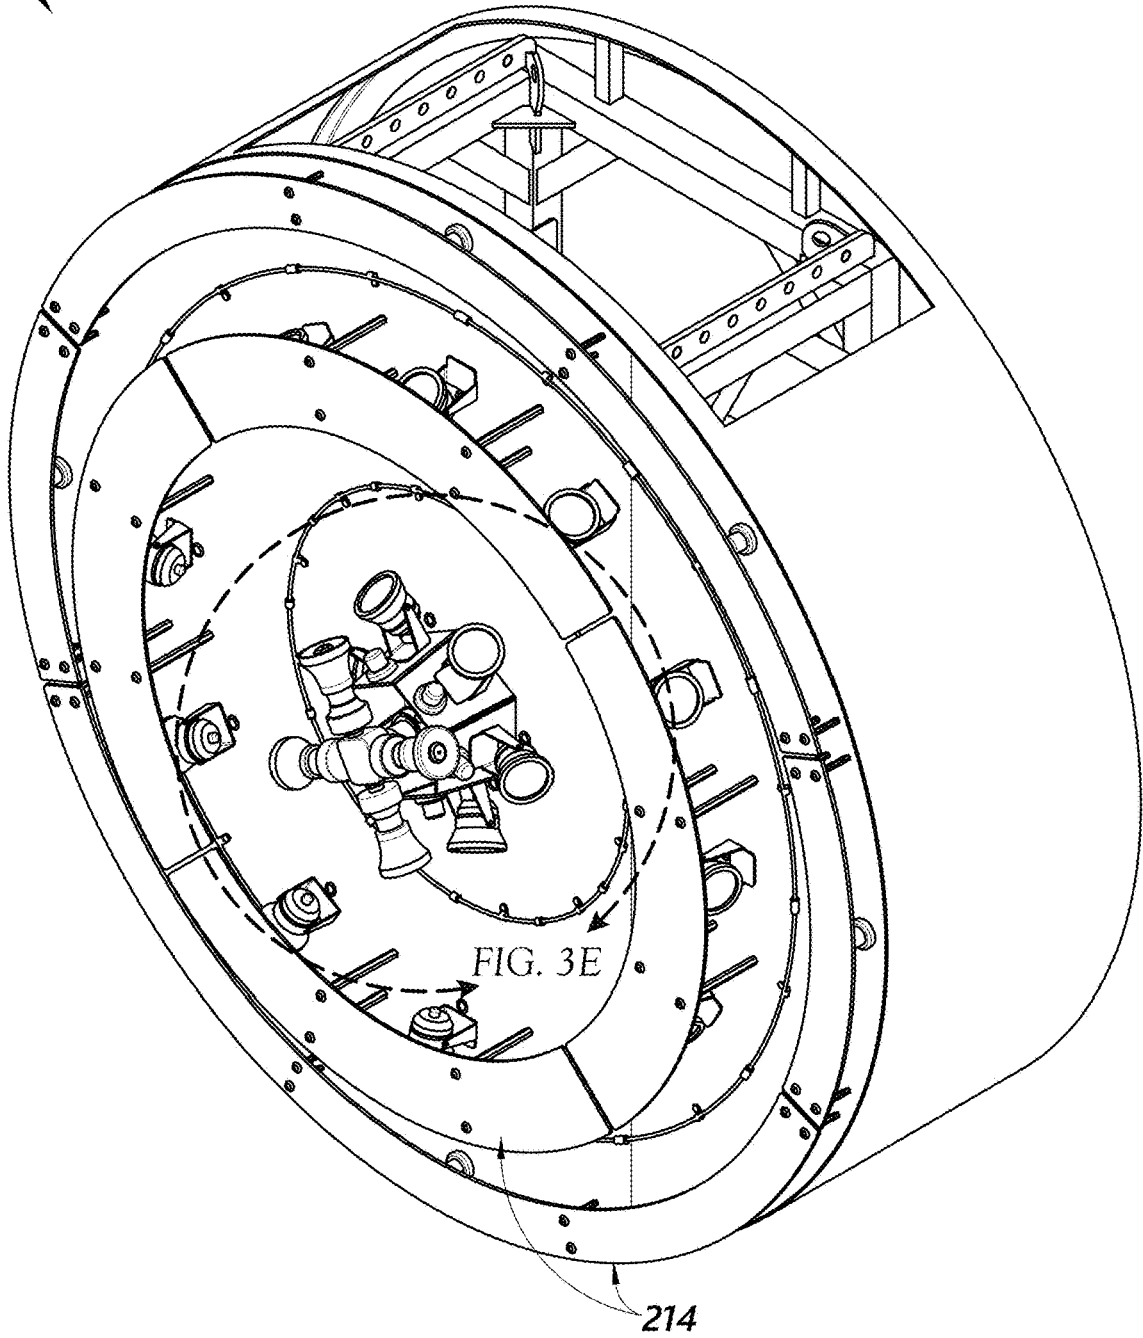


FIG. 3C

200

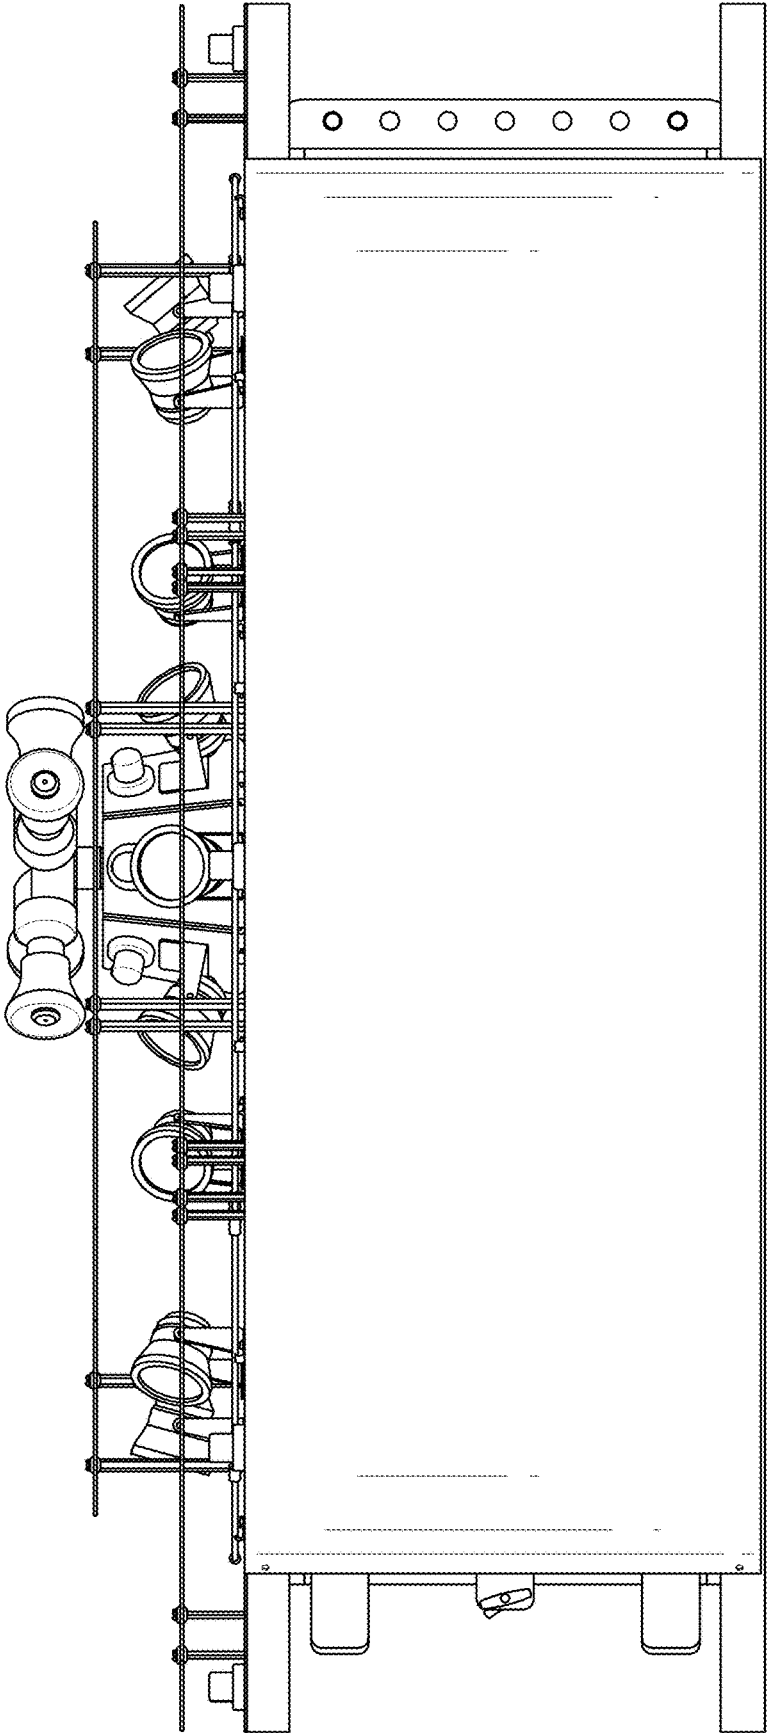


FIG. 3D

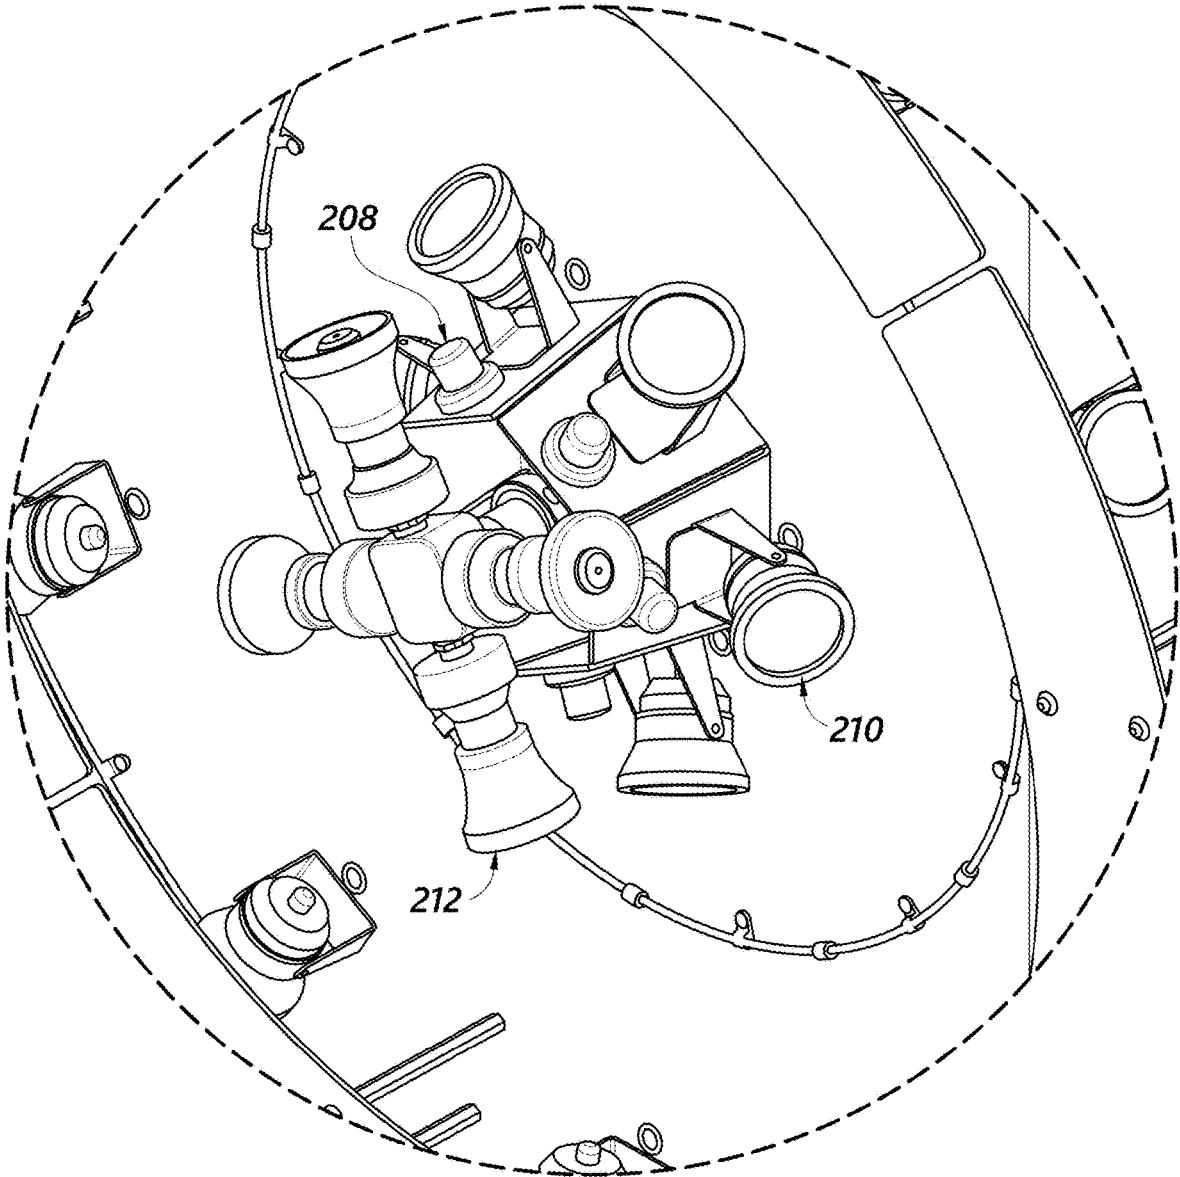


FIG. 3E

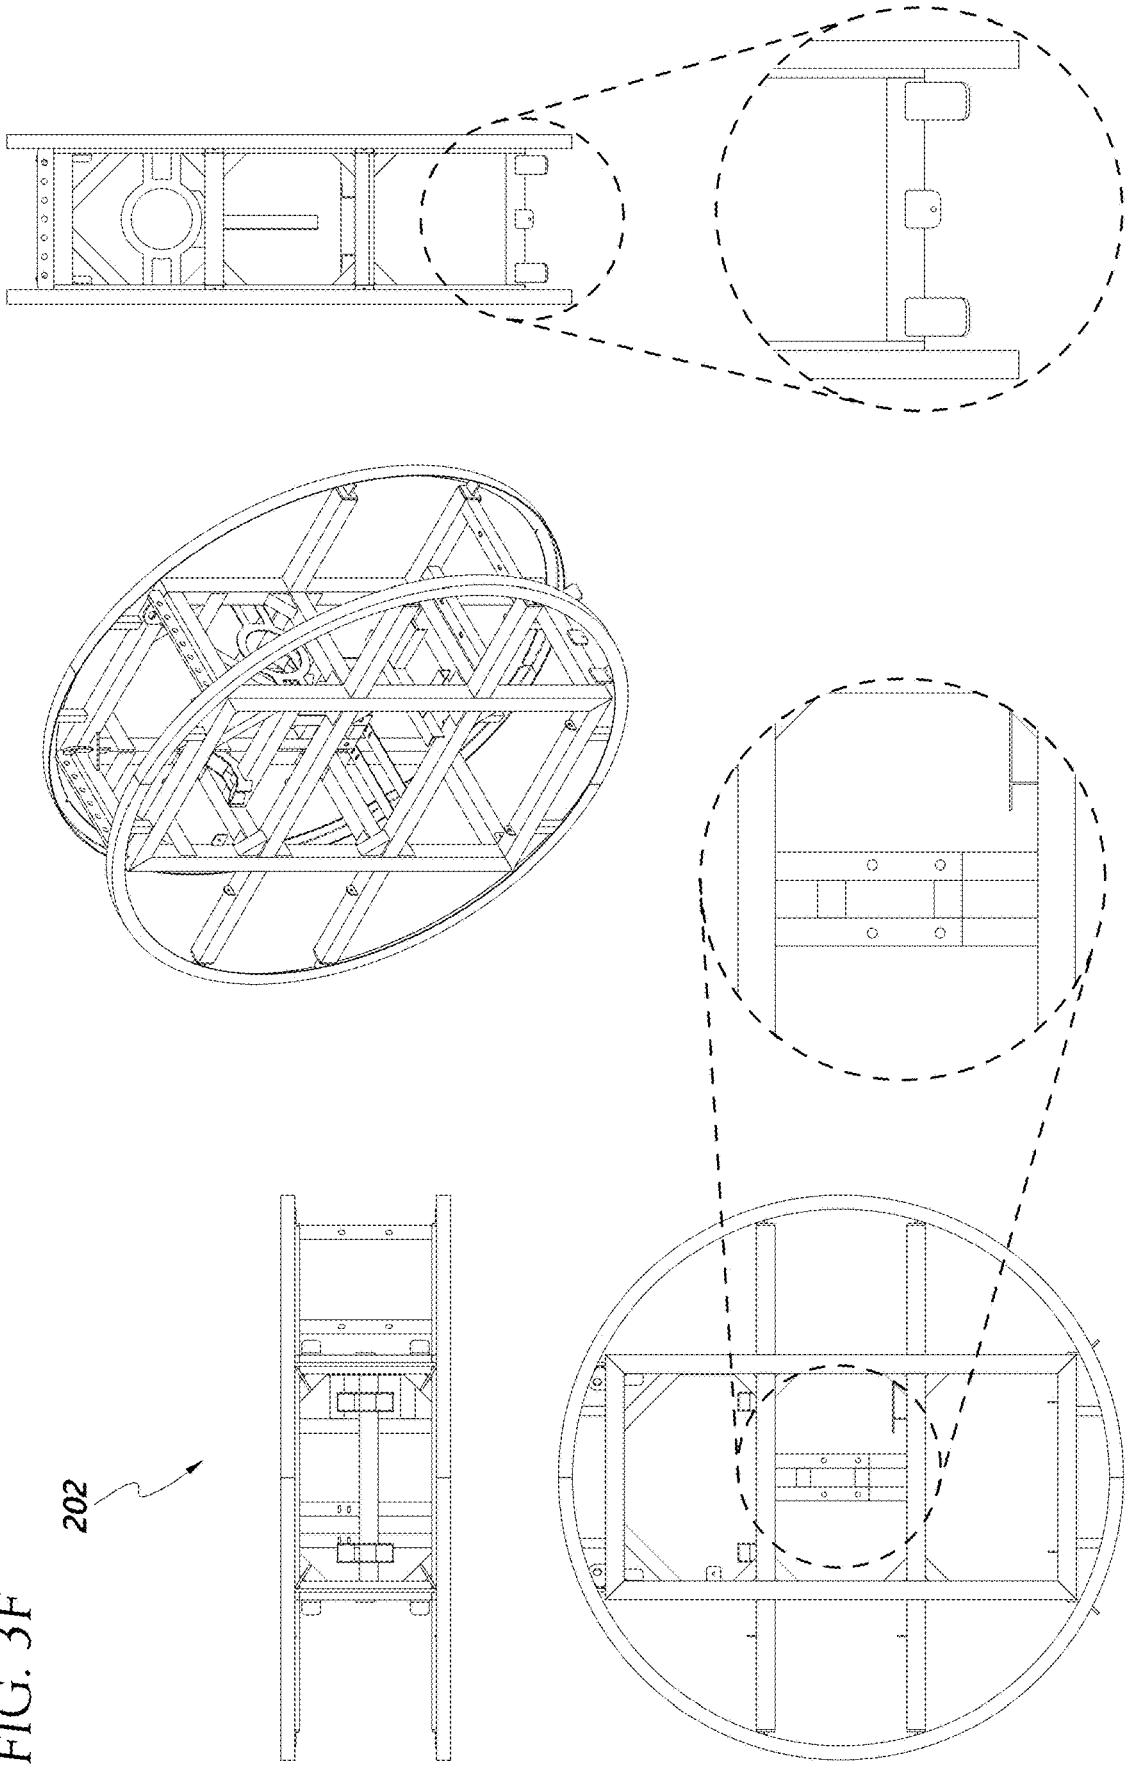


FIG. 3F

202

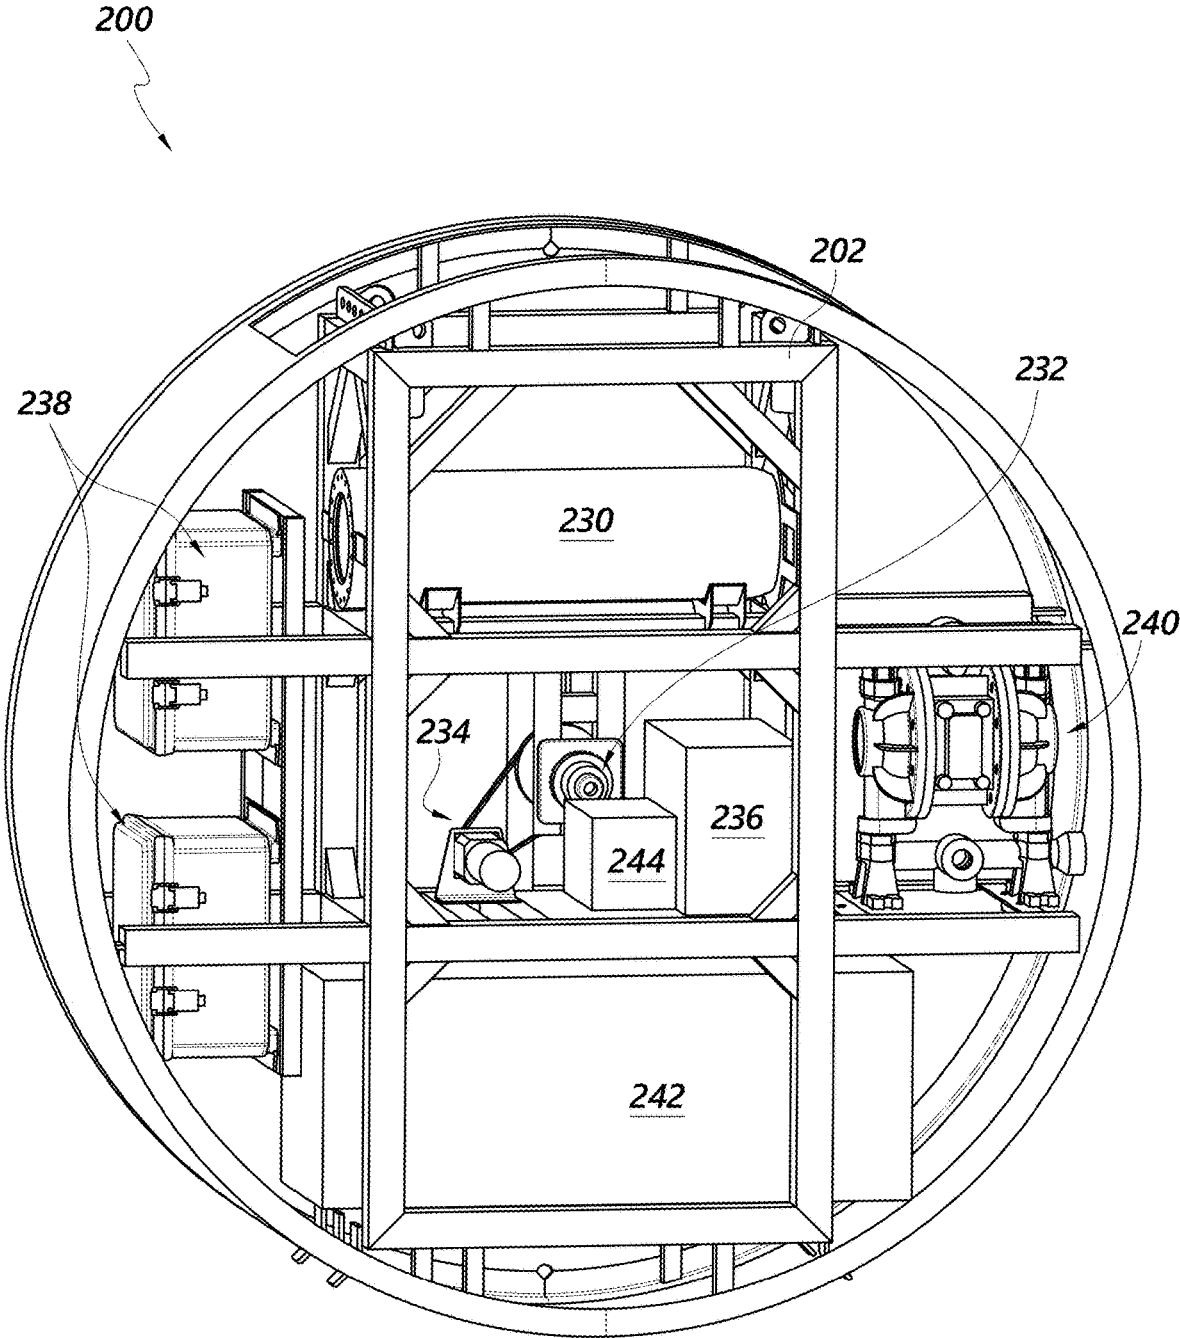
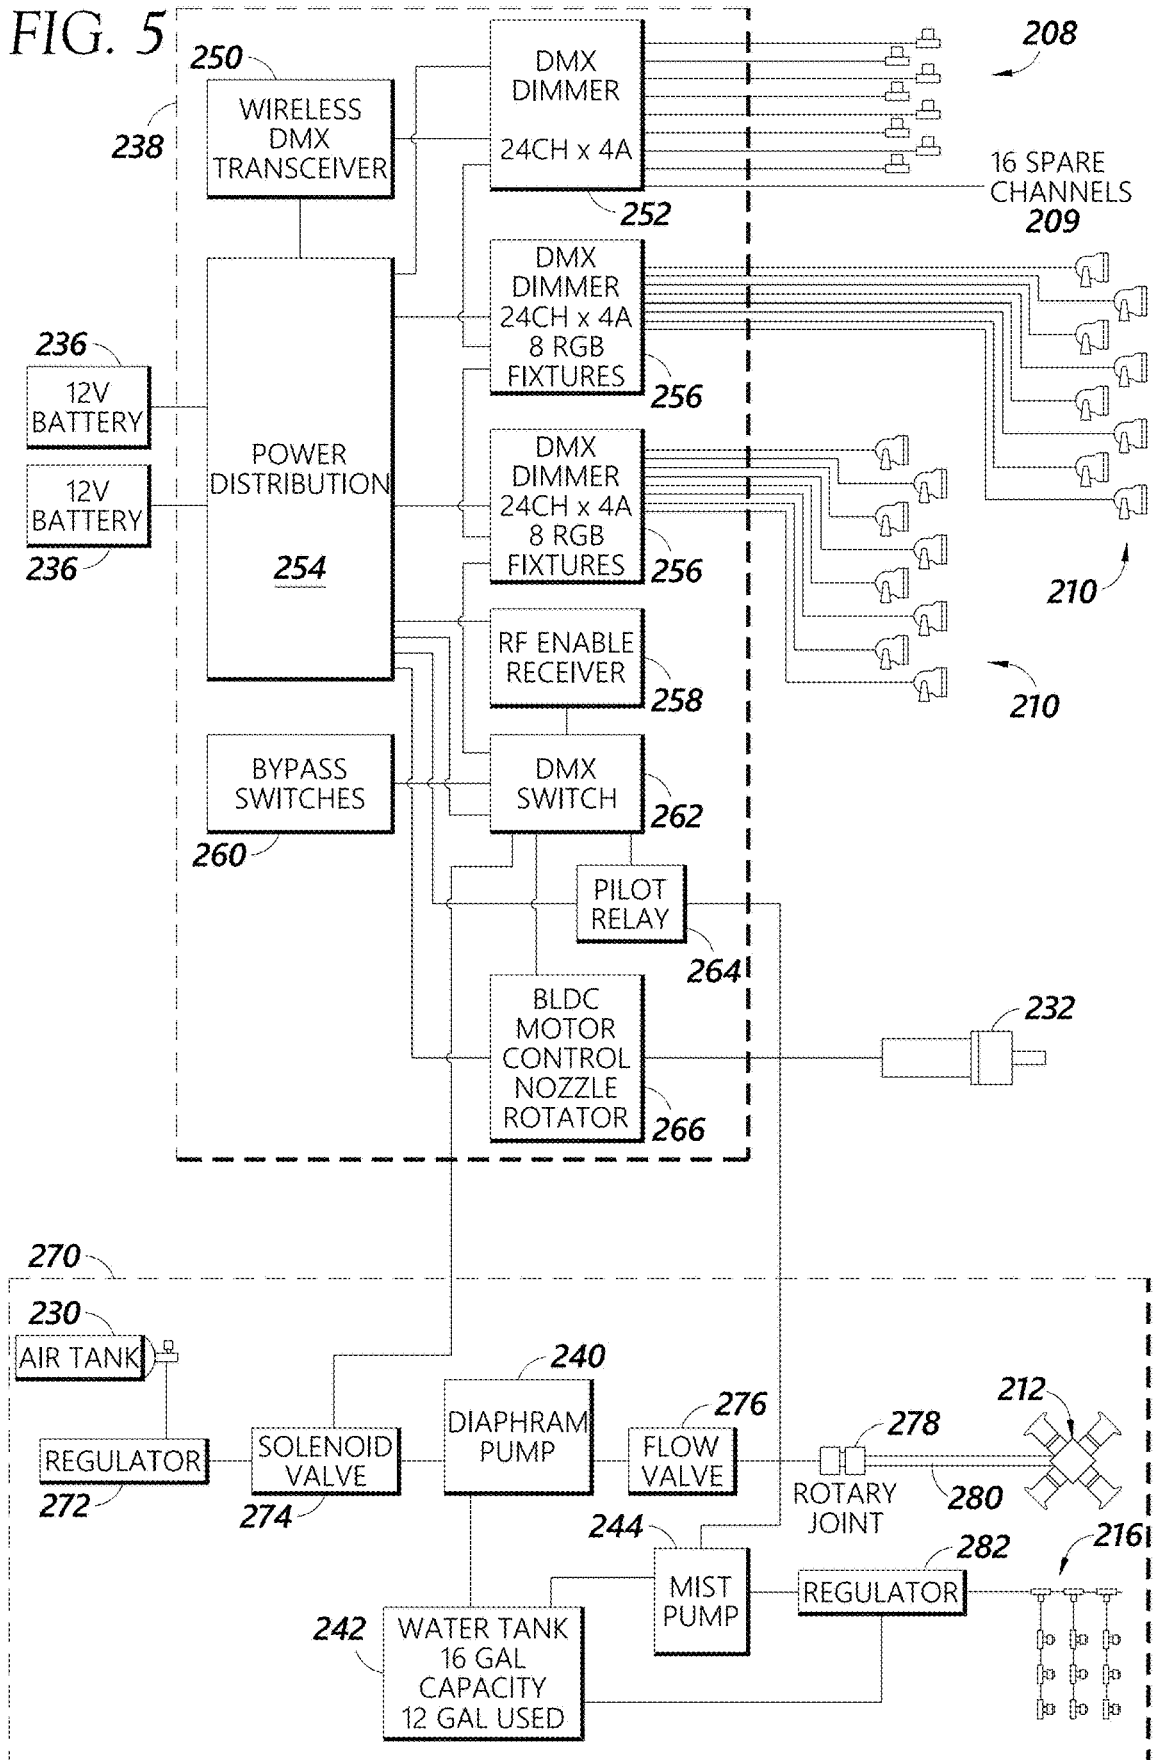


FIG. 4

FIG. 5



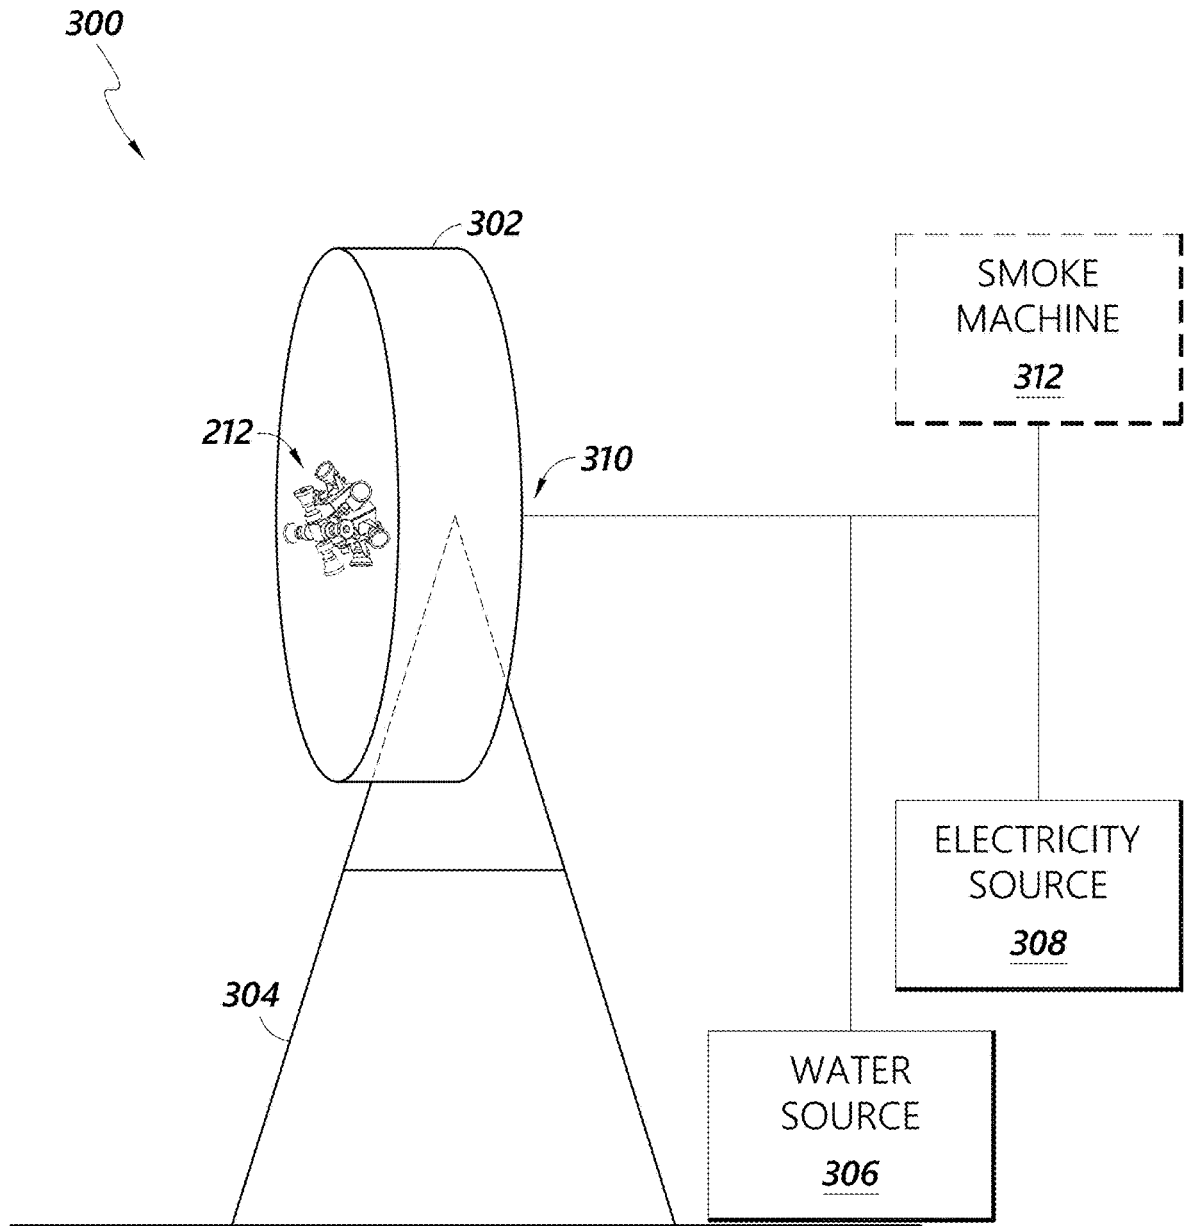


FIG. 6

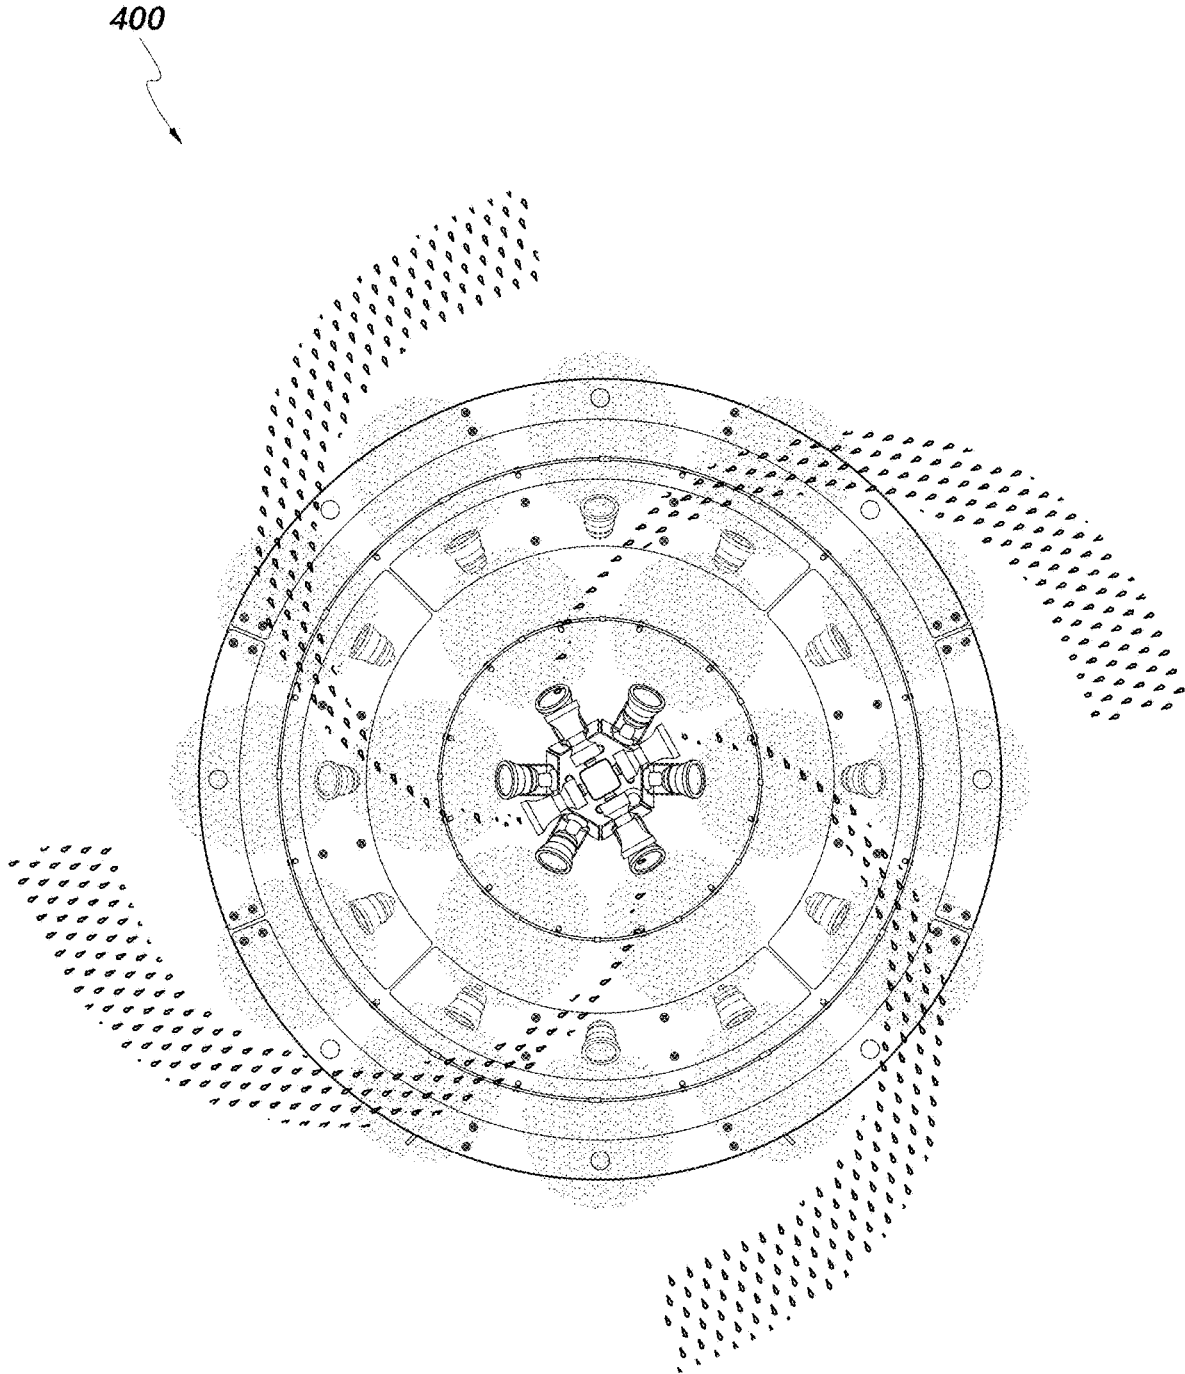


FIG. 7A

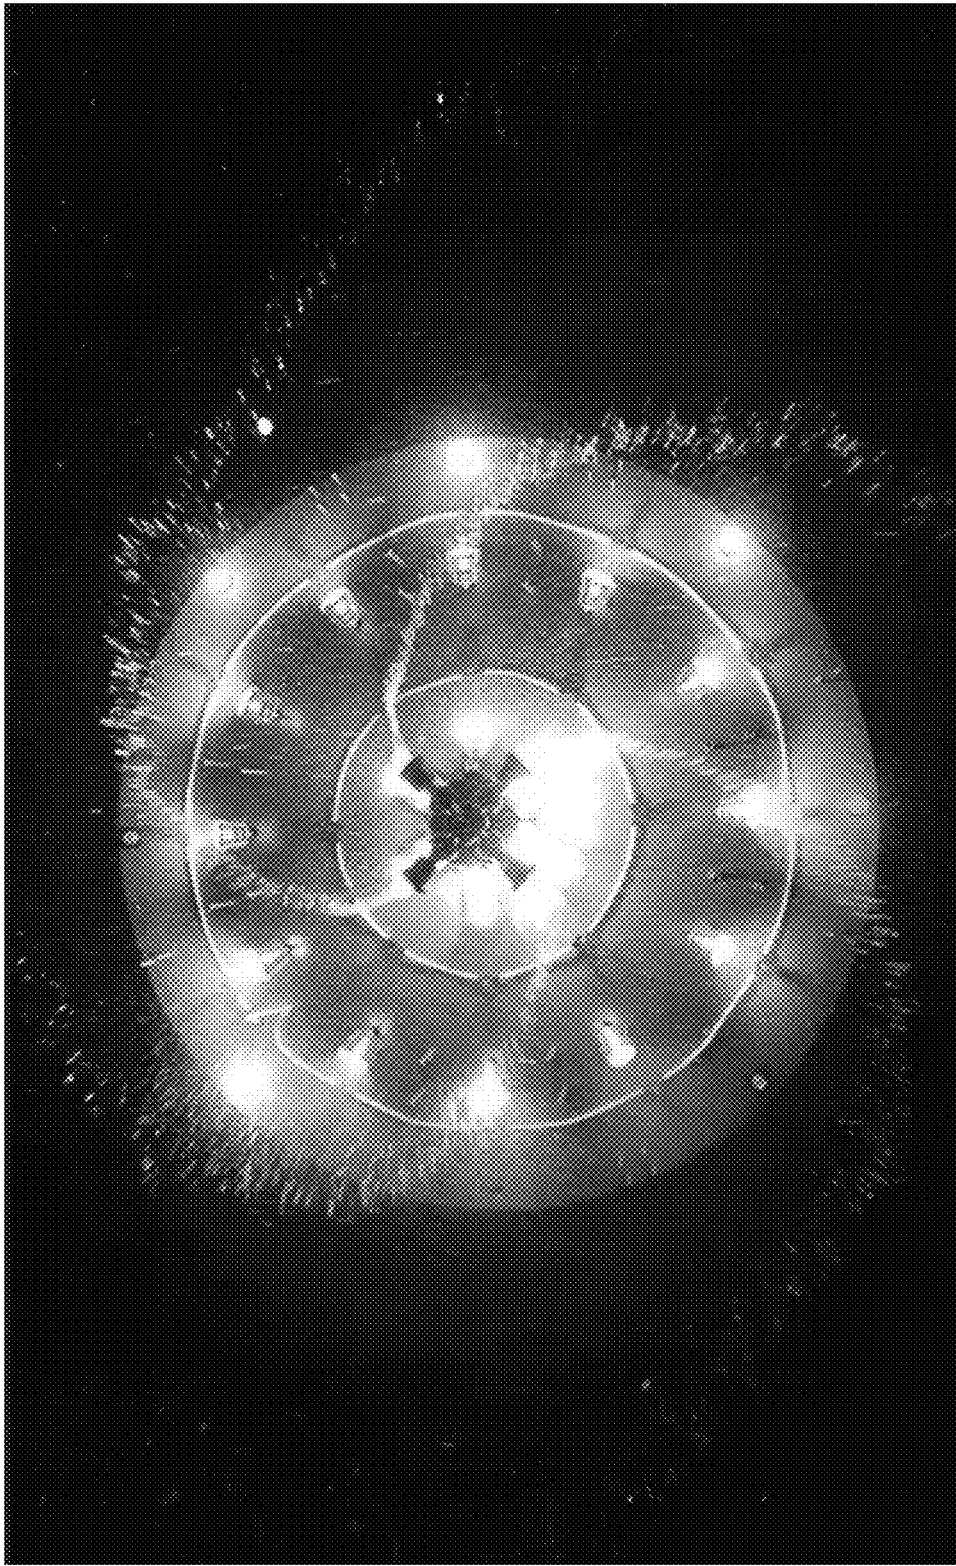


FIG. 7B

400

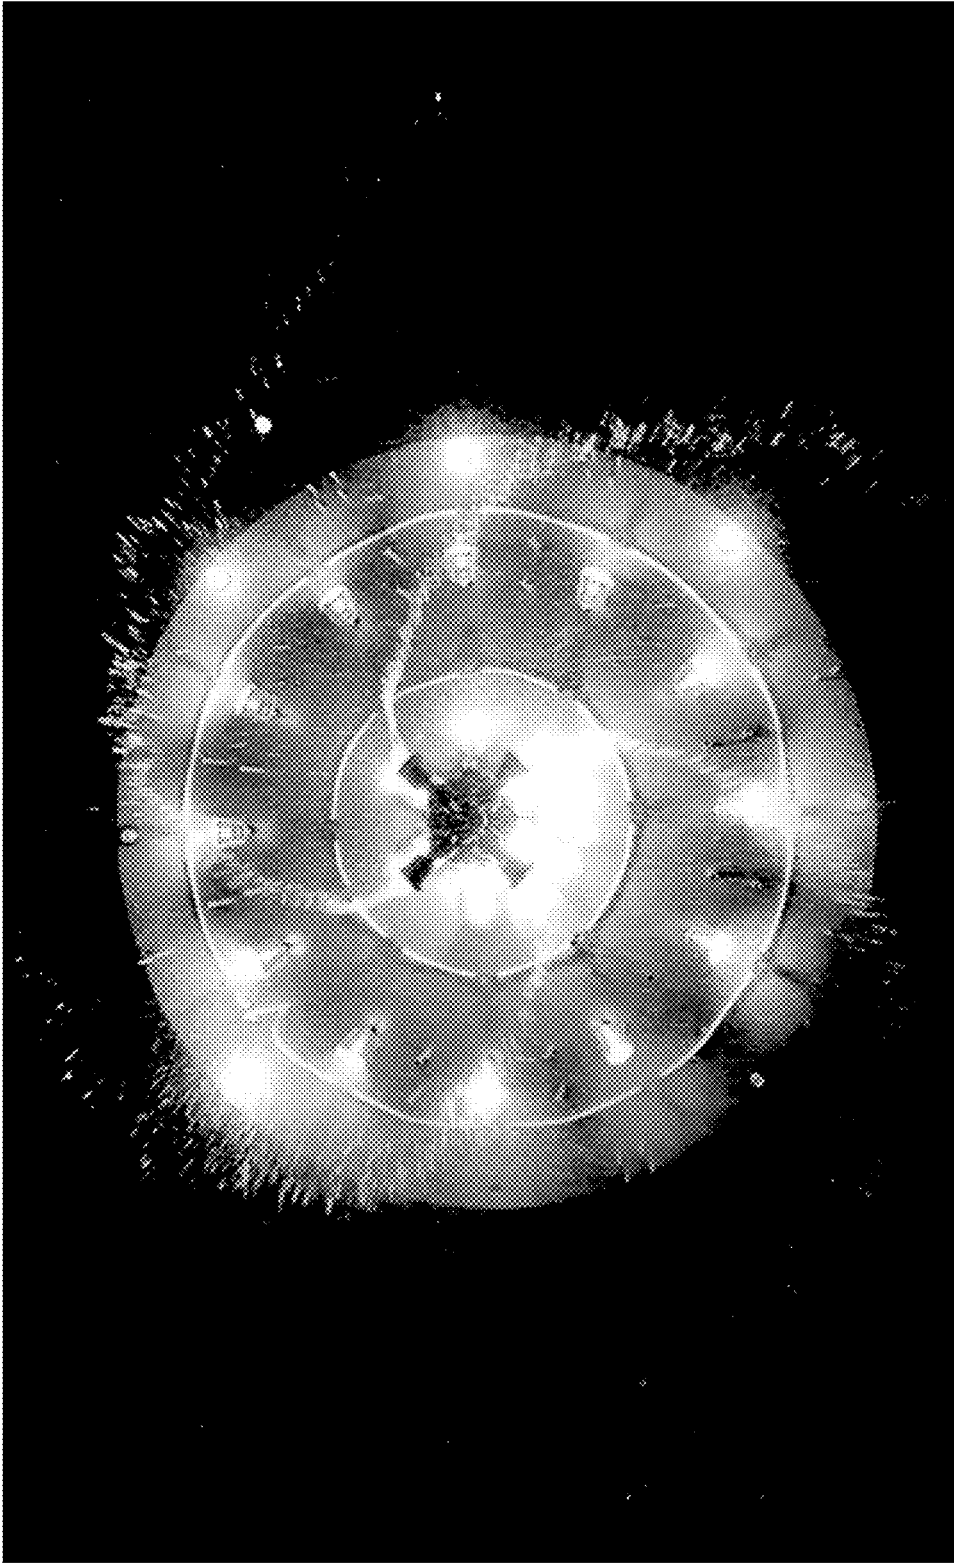


FIG. 7C

400 ↗

WATER-BASED PYROTECHNIC ILLUSION**CROSS-REFERENCE TO RELATED APPLICATION(S)**

This application claims the benefit of U.S. Provisional Application No. 62/937,682, filed Nov. 19, 2019, which is hereby incorporated by reference in its entirety.

BACKGROUND**Technological Field**

The present application relates to pyrotechnic water illusions, and in particular, to creating an illusion of rotary pyrotechnics using water.

Description of the Related Technology

Fireworks are a class of pyrotechnic devices used in many settings for aesthetic and entertainment purposes. In addition to being used as part of a traditional fireworks display, fireworks can also be used to enhance other entertainment productions, including live shows or performances, events, parties, etc. While the aesthetic aspects (e.g., the colors, brightness, acoustics, etc.) of fireworks may be desirable in various settings, fireworks also present a number of drawbacks that prevent fireworks from being used in certain environments. For example, fireworks may present a fire hazard, limiting the number of environments in which fireworks or other pyrotechnics can be safely used.

SUMMARY

The system, method, and devices of this disclosure each have several innovative aspects, no single one of which is solely responsible for its desirable attributes disclosed herein. Without limiting the scope of this disclosure, its more prominent features will now be discussed briefly. After considering this discussion, and particularly after reading the section entitled "Detailed Description" one will understand how the features of this disclosure provide advantages over other personalized recommendation solutions.

In a first aspect, a device for creating an illusion of rotary pyrotechnics is provided. The device can include at least one nozzle configured to rotate about an axis of the device and spray water in a radial direction while rotating; a water supply configured to provide the water to the at least one nozzle; and a lighting system configured to illuminate the water sprayed from the at least one nozzle to create an illusion of rotary pyrotechnics.

In some embodiments, the device can further include at least one mister surrounding the at least one nozzle from a front view, the at least one mister configured to receive water from the water supply, atomize the water into droplets, and spray the droplets in the radial direction. The lighting system can include a plurality of strobe lights positioned along a perimeter of the device, the strobe lights configured to illuminate the water sprayed from the at least one nozzle so as to create an illusion of light generated by rotary pyrotechnics; and a plurality of spot lights configured to illuminate the droplets sprayed from the at least one mister so as to create an illusion of smoke generated by rotary pyrotechnics. The at least one mister can be further configured to continue spraying the droplets after the at least one nozzle has stopped spraying water. The at least one nozzle can be arranged to face the radial direction such that the at least one

nozzle is configured to spray the water in the radial direction, and the spot lights can be arranged to face a direction forming an angle with the radial direction such that the spot lights are configured to illuminate the droplets sprayed from the at least one mister and the at least one nozzle.

In some embodiments, the device can further include a main shaft coaxial with the axis of the device and attached to the at least one nozzle; and a motor configured to spin the shaft so as to rotate the at least one nozzle about the axis.

In some embodiments, the device can further include a frame housing the water supply, wherein the water supply comprises a water tank located within the frame; a compressed air tank configured to store compressed air; a pneumatic water pump configured to pump water from the water tank to the at least one nozzle using the compressed air; and a rigging attachment configured to be coupled to a cable system, the cable system configured to move the device in space, wherein the device is configured to create the illusion of rotary pyrotechnics without any external water supply. The device can further include a battery configured to power the lighting system; a wireless receiver configured to receive a command to initiate the illusion of rotary pyrotechnics; and a controller configured control the pneumatic water pump and the lighting system to initiate the illusion of rotary pyrotechnics in response to the command received via the wireless receiver. The water tank can have a capacity to supply the at least one nozzle with the water to create the illusion of rotary pyrotechnics for at least 15 seconds. The device can have a weight of less than 400 pounds.

In some embodiments, the device can further include a frame defining a perimeter of the device, the at least one nozzle and the lighting system attached to the frame, the frame configured to be attached to a fixed structure configured to support the device, wherein the water supply comprises a connector configured to receive the water from a water tank external to the device. The device can further include a main shaft coaxial with the axis of the device and attached to the at least one nozzle; and a motor configured to spin the shaft so as to rotate the at least one nozzle about the axis.

In some embodiments, the device can further include a fog machine configured to emit a vapor from one or more apertures in the device, the fog machine being synchronized with the at least one nozzle to emit the vapor at the same time as the at least one nozzle sprays the water.

In some embodiments, the device can be configured to create the illusion of rotary pyrotechnics without the use of pyrotechnics.

In another aspect, a device for creating an illusion of rotary pyrotechnics the device comprising: a frame forming a perimeter of the device; at least one nozzle configured to rotate about an axis of the frame and spray water in a radial direction while rotating; a water tank housed within the frame and configured to provide water to the at least one nozzle; and a lighting system configured to illuminate the water sprayed from the at least one nozzle to create an illusion of rotary pyrotechnics.

In some embodiments, the device can further include at least one mister surrounding the at least one nozzle from a front view, the at least one mister configured to receive water from the water tank, atomize the water into droplets, and spray the droplets in the radial direction. The lighting system can include a plurality of strobe lights positioned along a perimeter of the device, the strobe lights configured to illuminate the water sprayed from the at least one nozzle so as to create an illusion of light generated by rotary pyro-

technics; and a plurality of spot lights configured to illuminate the droplets sprayed from the at least one mister so as to create an illusion of smoke generated by rotary pyrotechnics. The at least one mister can be further configured to continue spraying the droplets after the at least one nozzle has stopped spraying water. The at least one nozzle can be arranged to face the radial direction such that the at least one nozzle is configured to spray the water in the radial direction, and the spot lights can be arranged to face a direction forming an angle with the radial direction such that the spot lights are configured to illuminate the droplets sprayed from the at least one mister and the at least one nozzle.

In some embodiments, the device can further include a main shaft coaxial with the axis of the device and attached to the at least one nozzle; and a motor configured to spin the shaft so as to rotate the at least one nozzle about the axis.

In some embodiments, the device can further include a compressed air tank configured to store compressed air; a pneumatic water pump configured to pump water from the water tank to the at least one nozzle using the compressed air; and a rigging attachment configured to be coupled to a cable system, the cable system configured to move the device in space, wherein the device is configured to create the illusion of rotary pyrotechnics without any external water supply. The device can further include a battery configured to power the lighting system; a wireless receiver configured to receive a command to initiate the illusion of rotary pyrotechnics; and a controller configured control the pneumatic water pump and the lighting system to initiate the illusion of rotary pyrotechnics in response to the command received via the wireless receiver. The water tank can have a capacity to supply the at least one nozzle with the water to create the illusion of rotary pyrotechnics for at least 15 seconds. The device can have a weight of less than 400 pounds.

In some embodiments, the device can further include a fog machine configured to emit a vapor from one or more apertures in the device, the fog machine being synchronized with the at least one nozzle to emit the vapor at the same time as the at least one nozzle sprays the water.

In some embodiments, the device can be configured to create the illusion of rotary pyrotechnics without the use of pyrotechnics.

In yet another aspect, device for creating an illusion of rotary pyrotechnics, the device comprising: a frame forming a perimeter of the device, the frame configured to be supported by a fixed structure; at least one nozzle attached to the frame and configured to rotate about an axis of the frame and spray water in a radial direction while rotating; a water supply connector configured to receive water from a water tank external to the device and provide the water to the at least one nozzle; and a lighting system configured to illuminate the water sprayed from the at least one nozzle to create an illusion of rotary pyrotechnics.

In some embodiments, the device can further include at least one mister surrounding the at least one nozzle from a front view, the at least one mister configured to receive water from the water supply, atomize the water into droplets, and spray the droplets in the radial direction. The lighting system can further include a plurality of strobe lights positioned along a perimeter of the device, the strobe lights configured to illuminate the water sprayed from the at least one nozzle so as to create an illusion of light generated by rotary pyrotechnics; and a plurality of spot lights configured to illuminate the droplets sprayed from the at least one mister so as to create an illusion of smoke generated by rotary pyrotechnics. The at least one mister can be further config-

ured to continue spraying the droplets after the at least one nozzle has stopped spraying water. The at least one nozzle can be arranged to face the radial direction such that the at least one nozzle is configured to spray the water in the radial direction, and the spot lights can be arranged to face a direction forming an angle with the radial direction such that the spot lights are configured to illuminate the droplets sprayed from the at least one mister and the at least one nozzle.

In some embodiments, the device can further include a main shaft coaxial with the axis of the device and attached to the at least one nozzle; and a motor configured to spin the shaft so as to rotate the at least one nozzle about the axis.

In some embodiments, the frame of the device can define a perimeter of the device, the at least one nozzle and the lighting system attached to the frame, the frame configured to be attached to a fixed structure configured to support the device. The device can further include a main shaft coaxial with the axis of the device and attached to the at least one nozzle; and a motor configured to spin the shaft so as to rotate the at least one nozzle about the axis.

In some embodiments, the device can further include a fog machine configured to emit a vapor from one or more apertures in the device, the fog machine being synchronized with the at least one nozzle to emit the vapor at the same time as the at least one nozzle sprays the water.

In some embodiments, the device can be configured to create the illusion of rotary pyrotechnics without the use of pyrotechnics.

BRIEF DESCRIPTION OF THE DRAWINGS

The disclosed aspects will hereinafter be described in conjunction with the appended drawings and appendices, provided to illustrate and not to limit the disclosed aspects, wherein like designations denote like elements. The patent or application filed contains at least one drawing executed in color. Copies of this patent or patent application publication with color drawings will be provided by the Office upon request and payment of the necessary fee.

FIG. 1 shows the visual effects of Catherine wheel fireworks in accordance with aspects of this disclosure.

FIG. 2A is a partial cutaway perspective view of a device for creating an illusion of rotary pyrotechnics in accordance with aspects of this disclosure.

FIG. 2B is a partial cutaway perspective view of the device of FIG. 2A, illustrating one embodiment of equipment that can be used to transport the device.

FIG. 3A is a partial cutaway top view of the device of FIG. 2A.

FIG. 3B is a front view of the device of FIG. 2A.

FIG. 3C is a partial cutaway perspective view of the device of FIG. 2A.

FIG. 3D is a partial cutaway side view of the device of FIG. 2A.

FIG. 3E is a close up view of the water nozzles on the front of the device of FIG. 2A.

FIG. 3F provides a number of views of internal structural components of the device.

FIG. 4 is a cutaway backside view of the device illustrated in FIG. 2A.

FIG. 5 is an example block diagram illustrating an example control system for the device of FIG. 2A in accordance with aspects of this disclosure.

5

FIG. 6 illustrates an example device for creating an illusion of rotary pyrotechnics which can be installed in a permanent or fixed location in accordance with aspects of this disclosure.

FIGS. 7A, 7B, and 7C include a line drawing, a color photo, and a black and white photo illustrating the visual effects of an embodiment of the device of FIG. 2A in accordance with aspects of this disclosure.

DETAILED DESCRIPTION

Overview

Pyrotechnics such as fireworks are often used in many settings for aesthetic and entertainment purposes including various types of entertainment productions. Fireworks take many forms to produce certain effects, including at least noise, light, smoke, and floating materials (for example, confetti). However, since fireworks involve igniting a pyrotechnic device in a controlled manner, there are a number of environments and settings which may not be suitable for fireworks. For example, cruise ships may provide entertainment to passengers which often includes one or more live shows. Live show production for cruise ships has traditionally been restricted from the use of fireworks due to regulations implemented to ensure safety onboard the ship.

Another example type of entertainment production are aquatic shows, which may involve acrobatics performed over a large pool. Aquatic shows, which are traditionally performed in a permanent theater, are being adapted for performance on cruise ships due to their continued popularity. The use of fireworks in such performances, particularly in the cruise ship environment, may be relatively dangerous and/or prohibited. Thus, there is a demand for the recreation of fireworks using an illusion to recreate at least some of the effects of fireworks without the drawbacks, such as the fire hazard associated with traditional fireworks. In the context of aquatic shows, a water-based illusion may be particularly advantageous since these environments may be equipped with hardware that can be used to control such a water-based illusion (e.g., having proper drainage). In addition, the use of a physical medium (e.g., water or another liquid) to recreate fireworks may be more engaging to an audience compared to, for example, a simple visual projection of the image of fireworks onto a screen.

Yet another environment in which such a water based firework illusion may be so-called “pool parties” which are popular in entertainment centers such as Las Vegas. These parties may include live music, DJs, numerous swimming pools, etc. In this setting, the use of fireworks may also be a fire hazard, and thus, the use of a water-based firework illusion may be desirable.

Aspects of this disclosure relate to a water- or other liquid-based pyrotechnic illusion that can emulate one or more of the effects associated with traditional fireworks without creating the same safety concerns connected to the use of pyrotechnics. Although embodiments of this disclosure are described in connection with pyrotechnic illusions which are water-based, aspects of this disclosure are not limited thereto. For example, other liquids can also be used. In certain implementations, a liquid may be selected based on its viscosity, reflective properties, refractive properties, or any other properties that can affect the visual aspects of a pyrotechnic illusion. One type of pyrotechnic which may be emulated using water are rotary pyrotechnics, such as Catherine wheel fireworks (also referred to as a pinwheel). FIG.

6

1 shows the visual effects of Catherine wheel fireworks in accordance with aspects of this disclosure.

As shown in FIG. 1, the Catherine wheel firework 100 may include one or more rockets mounted at an angle with respect to a central axle of the firework body. In the FIG. 1 embodiment, two rocket-type fireworks are shown mounted to opposing sides of the firework body. As the rocket fireworks expel exhaust while they burn, the thrust provided by the rocket(s) spins the body of the Catherine wheel, creating a spiral pattern of sparks as the sparks are propelled from the spinning rockets.

There are a number of design challenges that are associated with creating an illusion of a Catherine wheel firework using water and light. For example, the visual patterns of a Catherine wheel firework, including the spiral spark pattern and bright lighting, may be difficult to recreate using water and electrical lighting systems. In addition, Catherine wheel fireworks are somewhat chaotic, including large and frequent variations in the timing, intensity, and color of the visual effects. Fireworks also create smoke, which can enhance the illusion if recreated effectively.

FIG. 2A is a partial cutaway perspective view of a device 200 for creating an illusion of rotary pyrotechnics in accordance with aspects of this disclosure. In particular, the device 200 includes a frame 202, an outer surface 204 and 206, a plurality of strobe lights 208, a plurality of spot lights 210, a plurality of water nozzles 212, one or more panels 214, and one or more misters 216. As described in detail herein, the device 200 can be configured to create the illusion of rotary pyrotechnics without the use of pyrotechnics, thereby producing at least some of the effects associated with rotary pyrotechnics without the safety hazards produced by pyrotechnics. Devices in accordance with aspects of this disclosure can include all of the associated listed features or a subset of the listed features.

FIG. 2B is a partial cutaway perspective view of the device 200 of FIG. 2A, illustrating one embodiment of equipment that can be used to transport the device 200. As shown in FIG. 2B, the device 200 can be configured to be placed on a removable cart 218, for example, when not in use. In addition, the device 200 can be configured to be connected to rigging lines 220 which may be supported by a spreader bar 222.

In the FIG. 2A embodiment, the frame 202 includes a rigging attachment 203, which can be used to attach the device to one or more cables (as shown in FIG. 2B) configured to raise the device up to an operational height. In some embodiments, the device 200 can be attached to a cable system (such as a 3D dynamic flying system) which can be used to position the device 200 at any location within a working volume using a set of cables and pulleys, as described herein.

The outer surface 204 may be formed on the sides and back of the device 200 and includes a grey cladding in the illustrated embodiment, however, in other embodiments, the outer surface 204 can include any material designed to cover and protect the internal components of the device 200. For example, the outer surface 204 may be water resistant in order to substantially prevent water sprayed from the device 200 from reaching electrical internal components. The outer surface 206 on the front of the device 200 may also be formed of a water resistant material. However, since the rotary pyrotechnic illusion may be viewed from the front of the device, the outer surface 206 may also have a certain amount of reflectance configured to reflect at least some of the light emitted from a lighting system, including the strobe lights 208 and/or the spot lights 210, to enhance the illusion.

In the illustrated embodiment, four water nozzles **212** are mounted on a rotating main shaft **232** (shown in FIG. **4**), however, a greater or fewer number of water nozzles **212** can be used in other embodiments. The water nozzles **212** are configured to rotate about an axis **205** of the device **200** and spray water in a radial direction while rotating. Thus, the water nozzles **212** are configured to spray water in a pattern that emulates the exhaust expelled by a rocket firework, while the water nozzles **212** are spun around the main shaft **232** such that the sprayed water forms a spiral pattern about the axis **205** of the device **200**. The water nozzles **212** are arranged to face a radial direction of the device **200** such that the water nozzles **212** are configured to spray the water in the radial direction (e.g., radially outward relative to the axis **205** of the device **200**).

The strobe lights **208** and the spot lights **210** are arranged to illuminate the water sprayed from the water nozzles **212** to manipulate the visual impact of the water sprayed from the water nozzles **212** in order to create an illusion of rotary pyrotechnics, in particular, creating an illusion of the light produced by rotary pyrotechnics. More specifically, since fireworks are typically used in a relatively dark environment, the water sprayed from the water nozzles **212** forming a spiral pattern may not be sufficient alone to emulate the light produced by a rotary pyrotechnic. Thus, the strobe lights **208** and spot lights **210** are configured to illuminate the water pattern produced by the water nozzles **212** in order to emulate the lighting of a traditional rotary pyrotechnic.

In some embodiments, the strobe lights **208** are configured to produce flashes of light in order to at least partially emulate the chaotic nature of pyrotechnic exhaust. The relatively intense flashes of light provided by the strobe lights **208** can recreate some of the intensity associated with pyrotechnics, such as the rockets of a Catherine wheel firework. The strobe lights **208** can be positioned along a perimeter of the device **200** as shown in FIG. **2A**. Alternatively, or in addition to strobe lights **208** positioned along the perimeter of the device **200**, strobe lights **208** may be positioned centrally near the axis **205** and behind the water nozzles **212**. The embodiment of FIG. **2A** includes a combination of centrally located strobe lights **208** and strobe lights **208** disposed along the perimeter of the device **200**.

For example, the strobe lights **208** can be implemented using technology similar to emergency vehicle strobe lights, which may be implemented as LEDs. It is desirable that the strobe lights **208** and the spot lights **210** have a certain degree of water resistance so that they are not damaged by the water sprayed to create the rotary pyrotechnic effects. The light emitted from the strobe lights **208** can reflect off of the outer surface **206** on the front of the device **200**. By forming the outer surface **206** on the front of the device **200** using a reflective material, such as aluminum, the reflected strobe light can provide a desirable sparkling effect to aid in the rotary pyrotechnic illusion.

In addition, the spot lights **210** are configured provide a level of background lighting to the water spray pattern. In some embodiments, the spot lights **210** are configured to change color, which can be used to emulate different colored fireworks. Thus, in some embodiments, the spot lights **210** may be RGB programmable lights that can be programmed to vary in intensity and/or color to recreate the visuals of a rotary pyrotechnic. The spot lights **210** can also be arranged to face a direction forming an angle with a radial direction of the device **200** (e.g., pointing forward or outward away from the plane of the outer surface **206**) such that the spot lights **210** are configured to illuminate droplets sprayed from the misters **216** and the water nozzles **212**.

For example, the spot lights **210** can be implemented using technology similar to lights that are used to create under-vehicle ground effects. It can be desirable to use independently controllable RGB lighting in order to recreate pyrotechnic effects. By having programmable RGB for the spot lights **210**, various different firework types can be recreated by appropriately programming the spot lights **210**. It is also desirable to use relatively high power lighting for the spot lights **210**. For example, the spot lights **210** may have a power rating of at least 10 W outputting at least 500 Lumens, or have a power rating of at least 50 W outputting at least 1000-2000 Lumens.

In some embodiments, such as the embodiment illustrated in FIG. **2A**, the strobe lights **208** and/or the spot lights **210** can be stationary with respect to the outer surface **206** on the front of the device **200**. That is, the strobe lights **208** and the spot lights **210** can effectively recreate the visual impact of a rotary pyrotechnic without rotating with the water nozzles **212**. However, in other embodiments, at least some of the strobe lights **208** and the spot lights **210** can also be mounted directly or indirectly to the main shaft **232** and rotated along with the water nozzles **212**.

The panels **214** may be arranged to at least partially obstruct the strobe lights **208** and/or the spot lights **210**. In some embodiments, the panels **214** may be frosted to any suitable degree (e.g., translucent), but other suitable configurations are possible, for example, the panels **214** may be transparent but tinted (e.g., with a specific color), semi-opaque, non-frosted, etc. In other embodiments, the panels **214** may not be included in the device **200**, for example, when the device **200** is configured to be positioned at a sufficient distance from the viewers such that obstruction of the strobe lights and/or the spot lights **210** is not required.

The frosted panels **214** can allow some light from the strobe lights **208** and/or the spot lights **210** therebehind to pass through, while also randomly dispersing the light to make it more difficult to view the source of the lights (e.g., the strobe lights **208** and/or the spot lights **210**) directly. Pyrotechnic devices may have a certain amount of "chaos" that is difficult to emulate. The frosted panels **214** can dissipate the light from the strobe lights **208** and/or the spot lights **210** to help recreate the "chaos" of pyrotechnics, for example, by eliminating at least some of the "precision" of bare lights (e.g., the relatively cylindrical or conical light radiating from the strobe lights **208** and/or the spot lights **210**). Thus, the frosted panels **214** can alter the light, making the strobe lights **208** and/or the spot lights **210** look less like lights and obscure the actual strobe light **208** fixtures and/or the spot light **210** fixtures. By at least partially obscuring the source of light from the strobe lights **208** and/or the spot lights **210**, the frosted panels **214** can in some cases create the appearance that the illuminated water droplets are a source of light.

FIGS. **3A-3F** provide a number of views of the device **200** illustrated in FIGS. **2A-2B**. In particular, FIG. **3A** is a partial cutaway top view of the device **200**, FIG. **3B** is a front view of the device **200**, FIG. **3C** is a partial cutaway perspective view of the device **200**, FIG. **3D** is a partial cutaway side view of the device **200**, FIG. **3E** is a close up view of the water nozzles **212** on the front of the device **200**, and FIG. **3F** provides a number of views of internal structural components of the device **200**. FIG. **4** is a cutaway backside view of the device **200** illustrated in FIG. **2A**.

With reference to FIGS. **3A-F** and **4**, the device **200** further includes an air tank **230**, the main shaft **232**, an electric motor **234**, a battery **236**, a controller **238**, a pneumatic water pump **240**, a water tank **242** and a mist pump

244. Although not illustrated, a removable fabric or other material can be used to cover the back of the device 200 to provide access to the internal components in some embodiments. The embodiment of the device 200 illustrated in FIGS. 2A-4 is a self-contained unit that can be configured to create an illusion of a rotary pyrotechnic without the use of an external water supply or external power source. Thus, the device 200 can be moved within a theatrical space from above using a cable system, without the need for complex power and water feed connections that would make the repositioning of the device complex, if not, impractical. The cable system may have a weight limit defining the maximum weight of loads which can be safely moved using the system. Thus, one design factor for the device 200 is to keep the weight of the device, when loaded with water, under the maximum weight of the cable system. In some implementations, the weight limit may be about 600 lbs, and thus, it may be desirable to design the device 200 to have a weight less than 600 lbs.

In one embodiment, the device 200 may have an overall weight of less than 400 lbs., when fully loaded with water. Depending on the embodiment, the device 200 may have a weight of about 100 lbs., 150 lbs., 200 lbs., 250 lbs., 300 lbs., 350 lbs., 450 lbs., 500 lbs., 550 lbs., or 600 lbs. These example weights are not intended to be limiting, and aspects of this disclosure can be suitably implemented in any suitable device. In one example embodiment, the air tank 230 has a weight of about 31.5 lbs., the controller 238 has a weight of about 25 lbs., the electric motor 234 has a weight of about 25 lbs., the pneumatic water pump 240 has a weight of about 25 lbs., the water tank 242 has a weight of about 110 lbs., the strobe lights 208 have a weight of about 0.1 lbs. each, the spot lights 210 have a weight of about 0.05 lbs. each, and the water nozzles 212 have a weight of about 0.5 lbs. each.

One example of a cable system is a 4 point rigging system configured to move a load (e.g., the device 200) via four cables, each connected to the device's rigging attachment 203 and a separate point in the environment surrounding the working volume in which the device 200 can be moved. One challenge to the use of such cable systems is that the top of the device 200 may tilt as the device 200 approaches the outside of the range of possible movement for the system, creating a "bowl" effect. The cable system can control the pitch and/or tilt of the device 200 to overcome this effect. The cable system can also be configured to ensure that the front of the device 200 substantially faces the audience, such that the audience can experience the full effect of the illusion.

In other embodiments, as shown in FIG. 6, a device for creating an illusion of rotary pyrotechnics can be installed in a permanent or fixed location. Thus, the device 300 in the FIG. 6 embodiment may not have the same weight design requirements and may not need to be self-contained. Details of these embodiments will be described below.

In certain embodiments, the water nozzles 212 can be rotated by supplying high-pressure water to the nozzles 212 along a curved path (e.g., a right angle turn) to help in rotation of the nozzles 212 around a central axle. However, the flow rate required to spin the nozzles 212 to get sufficient rotation speed (e.g., at a speed that simulates the speed of a rotary pyrotechnic, which may be in the range of 130-300 RPM) may not provide a desirable flow rate of water sprayed from of the water nozzles 212. That is, the water flow rate required to achieve a sufficient rotation speed of the water nozzles 212 may not provide the desired visual impact of the sprayed water for simulating the pyrotechnic exhaust of a

rotary pyrotechnic. For example, the self-propelled embodiment may have a 27-30 gal/min flow rate to achieve the desired rotation speed and size of the water spray effect.

In addition, in embodiments that use water pressure and flow to spin the water nozzles 212, relatively high pressure (e.g., a pressure between 40-80 PSI) may be required to achieve the rotation speeds required for emulating a rotary pyrotechnic. However, relatively lower water pressure is desirable in order to lengthen the duration of the illusion and to improve the quality of illusion effects. That is, relatively high pressure (e.g., pressure levels required to achieve the desired rotation speeds) may result in water droplets that have too much aberration, leading to poor reflection of the light off of the sprayed water and providing a less realistic emulation of a rotary pyrotechnic.

Thus, certain embodiments, such as the device 200 of FIGS. 2A-4, separate the mechanisms for spinning the water nozzles 212 and pumping water to the water nozzles 212, in order to separately control the rotation speed and water pressure/flow rate.

For embodiments where the device 200 is self-contained, such as the device 200 of FIGS. 2A-4, the device may be limited by weight. The use of batteries and electric motors that have sufficient power for pumping water from the water tank 242 to the water nozzles 212 may be too heavy to meet weight limits while providing a sufficient effect duration, particularly for use of the device with a cable system. Thus, in the device 200 illustrated in FIGS. 2A-4, the device 200 uses the pneumatic water pump 240 to pump water to the water nozzles 212 instead of using an electric water pump. The pneumatic water pump 240 is coupled to the air tank 230 and is configured to use the air pressure from the air tank to power the pneumatic pump 240 when pumping water from a water supply (e.g., the water tank 242) to the water nozzles 212.

The electric motor 234 is configured to spin the main shaft 232 to rotate the main shaft 232, and thus the water nozzles 212, at the desired rotation speed. Thus, the water nozzles 212 can be spun without the use of water pressure as in the self-propelled embodiments (e.g., embodiments in which redirection of the water flowing to the water nozzles 212 is used to spin the water nozzles 212). This enables the device 200 to separately control the speed and spray pattern, allowing for more design options when creating the illusion, providing an advantage over self-propelled devices. The main shaft 232 can also include a water inlet and piping (e.g., the rotary joint 278 and wet shaft 280 shown in FIG. 5) used to connect the water nozzles 212 to the pneumatic pump 240. The main shaft 232 may also be coaxial with an axis 205 of the device 200 around which the water nozzles 212 are configured to rotate.

Depending on the embodiment, the water nozzles 212 can be implemented to have a similar structure to that of fire hose nozzles, garden hose nozzles, or high-flow rate washing nozzles, thereby providing a conical to cylindrical spray pattern. Flow and pressure changes to the water provided to the water nozzles 212 (e.g., controlled by the pneumatic water pump 240) can control the size and shape of spray from the water nozzles 212. The water nozzles 212 may be configured to create relatively large droplets off of which light emitted from the strobe lights 208 can reflect. In some non-limiting embodiments, the water nozzles 212 create droplets in the range of about 0.08 inches to about 0.20 inches in diameter. These dimensions are examples, however, and smaller and larger droplet sizes can be suitably implemented. The combination of the water particle size, the

spray pattern, and the light emitted from the strobe lights **208** can thus emulate the particulates expelled from a rotary pyrotechnic.

The pneumatic water pump **240** may provide water to the water nozzles **212** at a pressure that creates a diameter of water spray of at least 5 ft. In some embodiments, the diameter of the water spray may be 6-7 ft. However, the diameter of the water spray may be greater or less the 5-7 ft., depending on the embodiment.

The misters **216** are coupled to the mist pump **244** that is separate from the pneumatic water pump **240**. Since the mist created by the misters **216** has a lower pressure and flow rate compared with the water nozzles **212**, a relatively small electric pump can be used as the mist pump **244** without significantly adding to the overall weight of the device **200**. The misters **216** can be configured to provide a 360° spray. For example, the misters **216** may have a similar structure to misters used for drip irrigation. The flow rate of the misters **216** can depend on the pressure of water provided to the misters **216** by the water pump **240**.

The device can include two rows of concentric misters **216** facing the perimeter of the device **200** which spray mist in a radial direction from the center of the device **200**. Thus, the misters **216** may surround the water nozzles **212** from a front view of the device **200**. In some embodiments, the misters **216** can provide a flat 360° spray pattern at a 45° angle with respect to the plane of the front surface of the device **200**. The misters **216** can receive water from the water tank **242**, atomize the water into droplets, and spray the droplets in a radial direction and/or in a forward or outward direction (e.g., parallel to the axis **205** of the device **200**) to produce a mist of water that provides masking of the device **200** as well as the illusion of smoke produced by rotary pyrotechnics. The outer ring of misters **216** interacts with the mist produced by the inner ring of misters **216**, softening the mist from the inner ring and improving the illusion. In some embodiments, the misters **216** can be configured to continue spraying mist after the water nozzles **212** have stopped spraying water, to continue the illusion of the smoke after illusion of the pyrotechnics has ended, creating the effect of lingering smoke after the pyrotechnics have expended all of their fuel.

The water sprayed from the water nozzles **212** can interact with the mist produced by the misters **216**, disrupting the mist and improving the smoke illusion. The strobe lights **208** and spot lights **210** illuminate the mist from the center of the device **200**, which can create or further enhance the smoke illusion. In some embodiments, the device **200** may include a fog machine (e.g., the fog machine **312** described in connection with FIG. 6) in place of the misters **216** which can be used to generate the smoke illusion.

With reference to FIG. 4, the internal components of the device **200** can be housed within a truss-line frame **202** defining bays for housing each of the components. Although not illustrated, the device **200** may also include pneumatic tubing and electrical controls connecting the various components of the device **200**. The frame **202** can be formed of aluminum, provide a relatively light structure to support the load of the device **200**, and allowing for a larger water tank **242** and battery **236** to extend the duration of the illusion for the same device **200** weight. In some embodiments, the water tank **242** may have a capacity to supply the water nozzles **212** with water to create an illusion of rotary pyrotechnics for at least 15 seconds, or in other embodiments, at least up to 30 seconds, 60 seconds, or longer.

FIG. 5 is an example block diagram illustrating an example control system for the device **200** of FIG. 2A in

accordance with aspects of this disclosure. The control system (also referred to as a controller) includes an electrical control system **238** and a water control system **270**. However, the division of the components of the control system into the electrical control system **238** and the water control system **270** is merely one example, and certain components can be swapped between the two systems and/or removed entirely from the control system depending on the embodiment.

The electrical control system **238** receives electrical power from one or more batteries **236** and is configured to power the strobe lights **208**, the spot lights **210**, and the motor **232** which rotates the main shaft **232**. The electrical control system **238** includes a power distributor **254**, a wireless transceiver **250**, one or more strobe light dimmers **252**, one or more spot light dimmers **256**, a wireless enable receiver **258**, one or more bypass switches **260**, a DMX switch **262**, a pilot relay **264**, and a motor controller **266**.

The power distributor **254** may be configured to provide power to each of the components of the device **200** by selectively providing power thereto. The wireless DMX transceiver **250** is configured to wirelessly communicate with a DMX controller (not illustrated) to, for example, receive a control signal or command to initiate the illusion of rotary pyrotechnics and/or receive a kill signal to terminate the illusion. Other signals can also be received via the DMX wireless transceiver **250**, such as instructions to run certain instructions to recreate different rotary pyrotechnic illusions. These different instructions can include, for example, different lighting patterns/colors, different water pressures to achieve smaller or larger diameter spray, different main shaft rotation speeds, etc.

The power distributor **254** can provide power to each of the strobe light dimmer **252**, the spot light dimmer(s) **256**, the DMX switch **262**, the pilot relay **264**, and the motor controller **266** based on a signal received from the wireless DMX transceiver **250**. The strobe light dimmer **252**, the spot light dimmer(s) **256**, and the DMX switch **262** can be daisy chained together to form a communication chain for instructions received via the wireless DMX transceiver **250**. Thus, each of these components can individually control their respective components using the instructions received via the DMX daisy chain.

In particular, the strobe light dimmer **252** is configured to control the strobe lights **208** by selectively providing power thereto based on the signal received from the wireless DMX transceiver **250**. Similarly, the spot light dimmer(s) **256** are configured to control the spot lights **210** by selectively providing power thereto based on the signal received from the wireless DMX transceiver **250**. As described above, the spot light dimmer(s) **256** can change the RGB values of the spot lights **210** individually to reproduce a large number of different colors to recreate the lighting of a rotary pyrotechnic.

The DMX switch **262** is configured to control a solenoid valve **274** (a component of the water control system **270**) to control the flow of compressed air from the air tank **230** to the pneumatic pump **240** to control the flow of water to the water nozzles **212**. The DMX switch **262** is also configured to control the pilot relay **264** to control the mist pump **244** to control the flow of water to the misters **216**. The DMX switch **262** is further configured to control the motor controller **266** to control the motor **232** to spin the main shaft **232** at a desired rotation speed around the axis of the main shaft **232** (e.g., which may be coaxial with the axis **205** of the device **200**).

The bypass switches **260** are configured to allow for testing of the device **200** when there is no DMX system safety enable available. During normal operation, the device **200** may only initiate the pyrotechnic illusion when the DMX enable is enabled and a latching switch on a control transmitter (not illustrated) in communication with the wireless DMX transceiver **250** is also enabled. During testing, it is possible to physically press and hold the bypass switches **260** in order to operate either the misters **216** or the water nozzles **212** and motor **232**.

The water control system **270** includes the air tank **230**, a first regulator **272**, the solenoid valve **274**, the pneumatic pump **240**, a flow valve **276**, a rotary joint **278**, a wet shaft **280**, the plurality of nozzles **212**, the water tank **242**, the mist pump **244**, a second regulator **282**, and the misters **216**.

The air tank **230** is configured to store compressed air and provide the compressed air to the pneumatic pump **240** to drive the pneumatic pump **240**. The first regulator **272** is configured to regulate the pressure of the air output from the air tank **230** to a predetermined pressure level (e.g., 70 PSI). As described above, the solenoid valve **274** is configured to selectively provide the compressed air from the air tank **230** to the pneumatic pump **240** based on a signal received from the DMX switch **262** to selectively drive the pneumatic pump **240**.

When the pneumatic pump **240** receives compressed air from the air tank **230** via the solenoid **274**, the pneumatic pump **240** is configured to pump water from the water tank **242** to the main nozzles **212** via the flow valve **276**, the rotary joint **278**, and the wet shaft **280**. The flow valve **276** can be configured to prevent water from flowing to the water nozzles **212** when the device **200** is not in use. The rotary joint **278** and the wet shaft **280** provide a path for water to flow from the pneumatic pump **276** to the water nozzles **212**. For example, the main shaft **232** may include the rotary joint **278** and the wet shaft **278**, allowing the main shaft **232** to rotate the water nozzles **212**, while also providing a path for water to flow therethrough.

The mist pump **244** is configured to pump water from the water tank **242** to the misters **216** via the second regulator **282** based on a signal received from the DMX switch **262** via the pilot relay **264**. The second regulator **282** is configured to regulate the pressure of the water pumped from the mist pump **244** to a predetermined level to be supplied to the misters **216**.

In some embodiments, speakers (not illustrated) can be used to provide sound effects to improve the illusion of the rotary pyrotechnic. For example, the device **200** can include one or more speakers to reproduce sound effects similar to those of a rotary pyrotechnic device. However, in other embodiments, the sound effects can be provided by speakers separate from the device **200** within the device's **200** environment (e.g., speakers forming a part of the aquatic show, within a pool party environment, etc.).

Although the device **200** of FIGS. 2A-5 has been described primarily in connection with a self-contained or otherwise mobile embodiment (e.g., that can be moved using a cable system such as a 3D flying system), in other embodiments, a device for creating an illusion of rotary pyrotechnics can be installed into a permanent or otherwise static installation. FIG. 6 illustrates an example device **303** for creating an illusion of rotary pyrotechnics can be installed in a permanent or fixed location **300** in accordance with aspects of this disclosure. In one implementation, the device **302** can be permanently installed in a pool party environment or other club environment **300**.

Similar to the device **200** of FIGS. 2A-5, the device **302** includes one or more water nozzles **212** arranged on a front face of the device **302**. The device **302** can include many of the same components of the device **200** of FIGS. 2A-5, and thus, a detailed description of the similar components for the device **302** may not be provided below.

As shown in FIG. 6, the device **302** can be supported by a fixed structure **304** configured to support the device **302**. Although the fixed structure **304** is illustrated as a freestanding structure in FIG. 6, the fixed structure **304** can be embodied in many different ways including being supported by a building or as part of another fixed structure within the environment **300**.

Since the device **302** does not need to be moved within the environment, the routing of water and/or electricity from external sources may be simplified compared to the more mobile embodiments described herein. In addition, the weight of the device **302** may be less than a similar self-contained mobile device since the device **302** need not include water storage features and/or compressed air features. Accordingly, a water source **306** and/or an electricity source **308** can be located outside of the device **302** itself. Since the water source **306** and/or the electricity source **308** are not contained within the device **302** the size of the device can be reduced compared to a self-contained embodiment. The device **302** can also include one or more connectors **310** configured to connect the device to the water source **306** and/or the electricity source **308**. In addition, there is no limit to the length of effect duration, so the illusion can be run continuously providing more flexibility in how the illusion can be incorporated into an entertainment production.

The device **302** may further comprise an optional fog machine **312** (also referred to as a smoke machine). In certain embodiments, the fog machine **312** can be configured to generate a relatively dense vapor from one or more apertures in the device **302** that creates the illusion of the smoke produced by a rotary pyrotechnic. The fog machine **312** can be synchronized with the water nozzles **212** to emit the vapor at the same time as the water nozzles **212** sprays water. In the stationary embodiment of FIG. 6, the fog machine **312** can be included as a part of the device **302** or can be located outside of the device **302**. In embodiments including the fog machine **312**, the misters **216**, mist pump **244** and associated components can be removed from the device **302**. In addition, in certain embodiments, the self-contained device **200** of FIGS. 2-4 can also be modified to include a fog machine **312** in pace of the misting system.

FIGS. 7A, 7B, and 7C include a line drawing, a color photo, and a black and white photo illustrating the visual effects of an embodiment of the device **200** of FIG. 2A in accordance with aspects of this disclosure. As shown in FIGS. 7A-7C, water sprayed from the rotating water nozzles **212** creates a spiral pattern of water, which reflects light from the strobe lights **208** and the spot lights **210**. In addition, the misters **216** produce a background mist that creates an illusion of the smoke produced by a rotary pyrotechnic.

ADDITIONAL EMBODIMENTS

It will be understood that not necessarily all objects or advantages may be achieved in accordance with any particular embodiment described herein. Thus, for example, those skilled in the art will recognize that certain embodiments may be configured to operate in a manner that achieves or optimizes one advantage or group of advantages

15

as taught herein without necessarily achieving other objects or advantages as may be taught or suggested herein.

Many other variations than those described herein will be apparent from this disclosure. For example, depending on the embodiment, certain acts, events, or functions of any of the algorithms described herein can be performed in a different sequence, can be added, merged, or left out altogether (for example, not all described acts or events are necessary for the practice of the algorithms). Moreover, in certain embodiments, acts or events can be performed concurrently, for example, through multi-threaded processing, interrupt processing, or multiple processors or processor cores or on other parallel architectures, rather than sequentially. In addition, different tasks or processes can be performed by different machines and/or computing systems that can function together.

The elements of a method, process, or algorithm described in connection with the embodiments disclosed herein can be embodied directly in hardware, in a software module stored in one or more memory devices and executed by one or more processors, or in a combination of the two. A software module can reside in RAM memory, flash memory, ROM memory, EPROM memory, EEPROM memory, registers, hard disk, a removable disk, a CD-ROM, or any other form of non-transitory computer-readable storage medium, media, or physical computer storage known in the art. An example storage medium can be coupled to the processor such that the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium can be integral to the processor. The storage medium can be volatile or nonvolatile. The processor and the storage medium can reside in an ASIC. The ASIC can reside in a user terminal. In the alternative, the processor and the storage medium can reside as discrete components in a user terminal.

All of the methods and processes described herein may be embodied in, and partially or fully automated via, software code modules executed by one or more general purpose computers. For example, the methods described herein may be performed by the computing system and/or any other suitable computing device. The methods may be executed on the computing devices in response to execution of software instructions or other executable code read from a tangible computer readable medium. A tangible computer readable medium is a data storage device that can store data that is readable by a computer system. Examples of computer readable mediums include read-only memory, random-access memory, other volatile or non-volatile memory devices, CD-ROMs, magnetic tape, flash drives, and optical data storage devices.

What is claimed is:

1. A device for creating an illusion of rotary pyrotechnics, the device comprising:

at least one nozzle configured to rotate about an axis of the device and spray water in a radial direction while rotating;

a water supply configured to provide the water to the at least one nozzle;

at least one mister arranged on an outer surface of the device and configured to produce a mist; and

a lighting system configured to illuminate the water sprayed from the at least one nozzle and the mist produced by the at least one mister to create an illusion of rotary pyrotechnics.

2. The device of claim 1, wherein the:

at least one mister surrounds the at least one nozzle from a front view, and wherein the at least one mister is

16

configured to receive water from the water supply, atomize the water into droplets, and spray the droplets.

3. The device of claim 1, wherein the lighting system comprises:

a plurality of strobe lights positioned along a perimeter of the device, the strobe lights configured to illuminate the water sprayed from the at least one nozzle so as to create an illusion of light generated by rotary pyrotechnics; and

a plurality of spot lights configured to illuminate the mist produced by the at least one mister so as to create an illusion of smoke generated by rotary pyrotechnics.

4. The device of claim 3, wherein the at least one mister is further configured to continue producing the mist after the at least one nozzle has stopped spraying water.

5. The device of claim 3, wherein the at least one nozzle is arranged to face the radial direction such that the at least one nozzle is configured to spray the water in the radial direction, and wherein the spot lights are arranged to face a direction forming an angle with the radial direction such that the spot lights are configured to illuminate the mist produced by the at least one mister.

6. The device of claim 1, further comprising:

a main shaft coaxial with the axis of the device and attached to the at least one nozzle; and

a motor configured to spin the shaft so as to rotate the at least one nozzle about the axis.

7. The device of claim 1, further comprising:

a frame housing the water supply, wherein the water supply comprises a water tank located within the frame; a compressed air tank configured to store compressed air; a pneumatic water pump configured to pump water from the water tank to the at least one nozzle using the compressed air; and

a rigging attachment configured to be coupled to a cable system, the cable system configured to move the device in space,

wherein the device is configured to create the illusion of rotary pyrotechnics without any external water supply.

8. The device of claim 7, further comprising:

a battery configured to power the lighting system;

a wireless receiver configured to receive a command to initiate the illusion of rotary pyrotechnics; and

a controller configured control the pneumatic water pump and the lighting system to initiate the illusion of rotary pyrotechnics in response to the command received via the wireless receiver,

wherein the water tank has a capacity to supply the at least one nozzle with the water to create the illusion of rotary pyrotechnics for at least 15 seconds.

9. The device of claim 8, wherein the device has a weight of less than 400 pounds.

10. The device of claim 1, further comprising:

a frame defining a perimeter of the device, the at least one nozzle and the lighting system attached to the frame, the frame configured to be attached to a fixed structure configured to support the device,

wherein the water supply comprises a connector configured to receive the water from a water tank external to the device.

11. The device of claim 10, further comprising:

a main shaft coaxial with the axis of the device and attached to the at least one nozzle; and

a motor configured to spin the shaft so as to rotate the at least one nozzle about the axis.

17

12. The device of claim 1, wherein the device is configured to create the illusion of rotary pyrotechnics without the use of pyrotechnics.

13. A device for creating an illusion of rotary pyrotechnics, the device comprising:

at least one nozzle configured to rotate about an axis of the device and spray water in a radial direction while rotating;

a water supply configured to provide the water to the at least one nozzle;

a fog machine configured to emit a vapor from one or more apertures in the device, the fog machine being synchronized with the at least one nozzle to emit the vapor at the same time as the at least one nozzle sprays the water; and

a lighting system configured to illuminate the water sprayed from the at least one nozzle and the vapor emitted by the fog machine to create an illusion of rotary pyrotechnics.

14. The device of claim 13, wherein the lighting system comprises:

a plurality of strobe lights positioned along a perimeter of the device, the strobe lights configured to illuminate the water sprayed from the at least one nozzle so as to create an illusion of light generated by rotary pyrotechnics; and

a plurality of spot lights configured to illuminate the vapor emitted by the fog machine so as to create an illusion of smoke generated by rotary pyrotechnics.

15. The device of claim 14, wherein the at least one nozzle is arranged to face the radial direction such that the at least one nozzle is configured to spray the water in the radial direction, and wherein the spot lights are arranged to face a direction forming an angle with the radial direction such that the spot lights are configured to illuminate the vapor emitted by the fog machine.

16. The device of claim 13, wherein the fog machine is further configured to continue emitting the vapor after the at least one nozzle has stopped spraying water.

17. The device of claim 13, further comprising:

a main shaft coaxial with the axis of the device and attached to the at least one nozzle; and

a motor configured to spin the shaft so as to rotate the at least one nozzle about the axis.

18. The device of claim 13, further comprising:

a frame housing the water supply, wherein the water supply comprises a water tank located within the frame; a compressed air tank configured to store compressed air; a pneumatic water pump configured to pump water from the water tank to the at least one nozzle using the compressed air; and

a rigging attachment configured to be coupled to a cable system, the cable system configured to move the device in space,

wherein the device is configured to create the illusion of rotary pyrotechnics without any external water supply.

19. The device of claim 18, further comprising:

a battery configured to power the lighting system;

a wireless receiver configured to receive a command to initiate the illusion of rotary pyrotechnics; and

a controller configured control the pneumatic water pump and the lighting system to initiate the illusion of rotary pyrotechnics in response to the command received via the wireless receiver,

wherein the water tank has a capacity to supply the at least one nozzle with the water to create the illusion of rotary pyrotechnics for at least 15 seconds.

18

20. The device of claim 13, wherein the device has a weight of less than 400 pounds.

21. The device of claim 13, further comprising:

a frame defining a perimeter of the device, the at least one nozzle and the lighting system attached to the frame, the frame configured to be attached to a fixed structure configured to support the device,

wherein the water supply comprises a connector configured to receive the water from a water tank external to the device.

22. The device of claim 21, further comprising:

a main shaft coaxial with the axis of the device and attached to the at least one nozzle; and

a motor configured to spin the shaft so as to rotate the at least one nozzle about the axis.

23. A device for creating an illusion of rotary pyrotechnics, the device comprising:

a frame forming a perimeter of the device;

at least one nozzle configured to rotate about an axis of the frame and spray water in a radial direction while rotating;

a water tank housed within the frame and configured to provide water to the at least one nozzle;

at least one mister arranged on an outer surface of the device and configured to produce a mist; and

a lighting system configured to illuminate the water sprayed from the at least one nozzle and the mist produced by the at least one mister to create an illusion of rotary pyrotechnics.

24. The device of claim 23, wherein the

at least one mister surrounds the at least one nozzle from a front view, and wherein the at least one mister is configured to receive water from the water tank, atomize the water into droplets, and spray the droplets.

25. The device of claim 23, wherein the lighting system comprises:

a plurality of strobe lights positioned along a perimeter of the device, the strobe lights configured to illuminate the water sprayed from the at least one nozzle so as to create an illusion of light generated by rotary pyrotechnics; and

a plurality of spot lights configured to illuminate the mist produced by the at least one mister so as to create an illusion of smoke generated by rotary pyrotechnics.

26. A device for creating an illusion of rotary pyrotechnics, the device comprising:

a frame forming a perimeter of the device, the frame configured to be supported by a fixed structure;

at least one nozzle attached to the frame and configured to rotate about an axis of the frame and spray a liquid in a radial direction while rotating;

a liquid supply connector configured to receive the liquid from a liquid tank external to the device and provide the liquid to the at least one nozzle;

at least one mister arranged on an outer surface of the device and configured to produce a mist; and

a lighting system configured to illuminate the liquid sprayed from the at least one nozzle and the mist produced by the at least one mister to create an illusion of rotary pyrotechnics.

27. The device of claim 26, wherein the

at least one mister surrounds the at least one nozzle from a front view, and wherein the at least one mister is configured to receive the liquid from the liquid supply, atomize the liquid into droplets, and spray the droplets in the radial direction.

28. The device of claim 26, wherein the lighting system comprises:

a plurality of strobe lights positioned along a perimeter of the device, the strobe lights configured to illuminate the liquid sprayed from the at least one nozzle so as to create an illusion of light generated by rotary pyrotechnics; and

a plurality of spot lights configured to illuminate the mist produced by the at least one mister so as to create an illusion of smoke generated by rotary pyrotechnics.

29. The device of claim 28, wherein the at least one mister is further configured to continue producing the mist after the at least one nozzle has stopped spraying the liquid.

* * * * *