



US011435649B2

(12) **United States Patent**  
**Wharton**

(10) **Patent No.:** **US 11,435,649 B2**  
(45) **Date of Patent:** **Sep. 6, 2022**

(54) **APPARATUS AND METHOD FOR CALIBRATING AN AERIAL MOVEMENT SYSTEM**

(75) Inventor: **Stephen Wharton**, Claremore, OK (US)

(73) Assignee: **CABLECAM, LLC**, Fort Worth, TX (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 82 days.

(21) Appl. No.: **12/974,733**

(22) Filed: **Dec. 21, 2010**

(65) **Prior Publication Data**  
US 2011/0204197 A1 Aug. 25, 2011

**Related U.S. Application Data**

(60) Provisional application No. 61/289,832, filed on Dec. 23, 2009.

(51) **Int. Cl.**  
**G03B 15/00** (2021.01)  
**H04N 5/225** (2006.01)  
**G03B 17/56** (2021.01)  
**B61B 7/04** (2006.01)  
**F16M 11/42** (2006.01)  
**F16M 11/18** (2006.01)  
**B66C 13/08** (2006.01)  
**B66C 21/00** (2006.01)  
**B25J 9/00** (2006.01)  
**F16M 11/04** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **G03B 15/00** (2013.01); **B61B 7/04** (2013.01); **G03B 17/561** (2013.01); **H04N 5/225** (2013.01); **B25J 9/0078** (2013.01); **B66C 13/08** (2013.01); **B66C 21/00** (2013.01); **F16M 11/043** (2013.01); **F16M 11/18** (2013.01); **F16M 11/425** (2013.01)

(58) **Field of Classification Search**  
CPC ..... B66C 13/08; B66C 21/00; B25J 9/0078; G03B 15/00; G03B 17/561; B61B 7/04; F16M 11/043; F16M 11/18; F16M 11/425; H04N 5/225  
USPC ..... 73/1.79; 104/173.1, 178, 179; 248/317, 248/323; 348/144, 157  
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,633,054 A 1/1947 Black  
2,538,910 A 4/1947 Miller  
3,324,239 A 6/1967 Jacobson  
3,437,748 A 4/1969 Latady et al.  
3,935,380 A 1/1976 Coutta  
4,027,329 A 5/1977 Coutta  
4,625,938 A \* 12/1986 Brown ..... 248/550

(Continued)

FOREIGN PATENT DOCUMENTS

GB 2133158 A1 7/1984

OTHER PUBLICATIONS


International Search Report, International Application No. PCT/US10/61557, dated Mar. 1, 2011.

*Primary Examiner* — Zachary L Kuhfuss  
(74) *Attorney, Agent, or Firm* — Schroeder Intellectual Property Law Group, LLC

(57) **ABSTRACT**

An aerial movement system and method for calibrating same includes, generally, registration points and wireless position transceivers proximate the registration points and the object that communicate with a computer and allow for the computer to determine the appropriate amount of support lines to draw in or release.

**1 Claim, 2 Drawing Sheets**

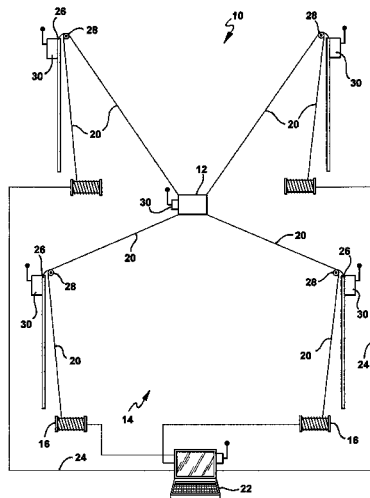

(56)

References Cited

U.S. PATENT DOCUMENTS

4,710,819	A	12/1987	Brown	8,251,597	B2	8/2012	Dougherty et al.
4,873,571	A	10/1989	Balet et al.	8,402,898	B2	3/2013	Rodnunsky
5,080,302	A	1/1992	Hoke	9,063,390	B2	6/2015	Wharton
5,224,426	A	7/1993	Rodnunsky et al.	9,477,141	B2*	10/2016	Wharton ..... H04N 5/232
5,440,476	A	8/1995	Lefkowitz et al.	9,964,836	B2	5/2018	Bennett et al.
5,568,189	A	10/1996	Kneller	10,099,368	B2*	10/2018	DelSpina ..... B25J 9/161
5,585,707	A	12/1996	Thompson et al.	10,103,813	B2*	10/2018	Wharton ..... F16M 11/425
6,160,371	A *	12/2000	Tachikawa ..... 318/568.11	10,471,590	B1*	11/2019	Vachon ..... B25J 9/1623
6,566,834	B1	5/2003	Albus et al.	2005/0242052	A1	11/2005	O'Conner et al.
6,809,495	B2	10/2004	Rodnunsky	2007/0064208	A1*	3/2007	Giegerich ..... F16M 11/046
6,873,355	B1	3/2005	Thompson et al.				353/122
6,886,471	B2	5/2005	Rodnunsky	2009/0066100	A1*	3/2009	Bosscher et al. .... 294/86.4
6,975,089	B2	12/2005	Rodnunsky et al.	2009/0207250	A1*	8/2009	Bennett ..... F16M 11/2064
7,036,436	B2	5/2006	MacDonald et al.				348/144
7,088,071	B2	8/2006	Rodnunsky	2011/0204196	A1*	8/2011	Wharton ..... G03B 15/00
7,127,998	B2	10/2006	MacDonald et al.				248/323
7,207,277	B2	4/2007	Rodnunsky	2012/0211628	A1*	8/2012	Fisher ..... F16M 11/12
7,239,106	B2	7/2007	Rodnunsky et al.				248/329
7,948,431	B2*	5/2011	Gulden et al. .... 342/42	2012/0298825	A1*	11/2012	Fisher ..... 248/323
8,199,197	B2*	6/2012	Bennett et al. .... 348/144	2013/0050467	A1*	2/2013	Wharton ..... 348/86
				2013/0050652	A1*	2/2013	Wharton ..... 352/34
				2013/0051805	A1*	2/2013	Wharton ..... 398/96

\* cited by examiner

FIG. 1


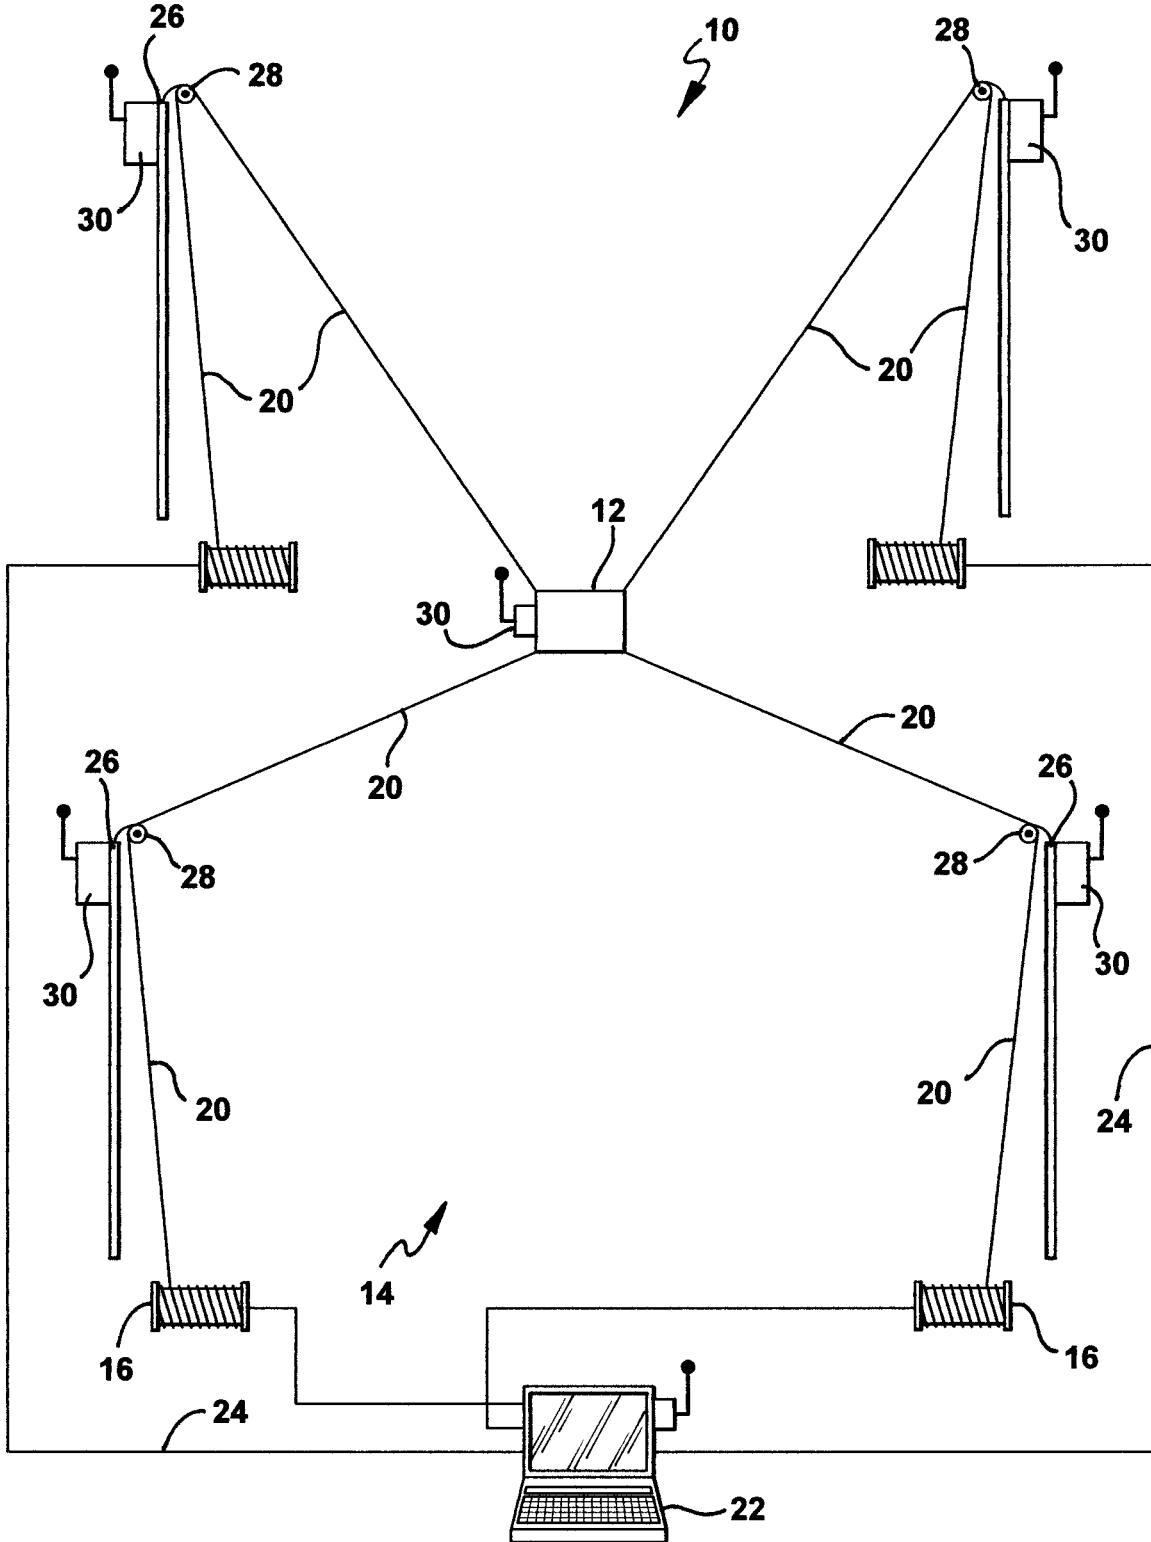


FIG. 2

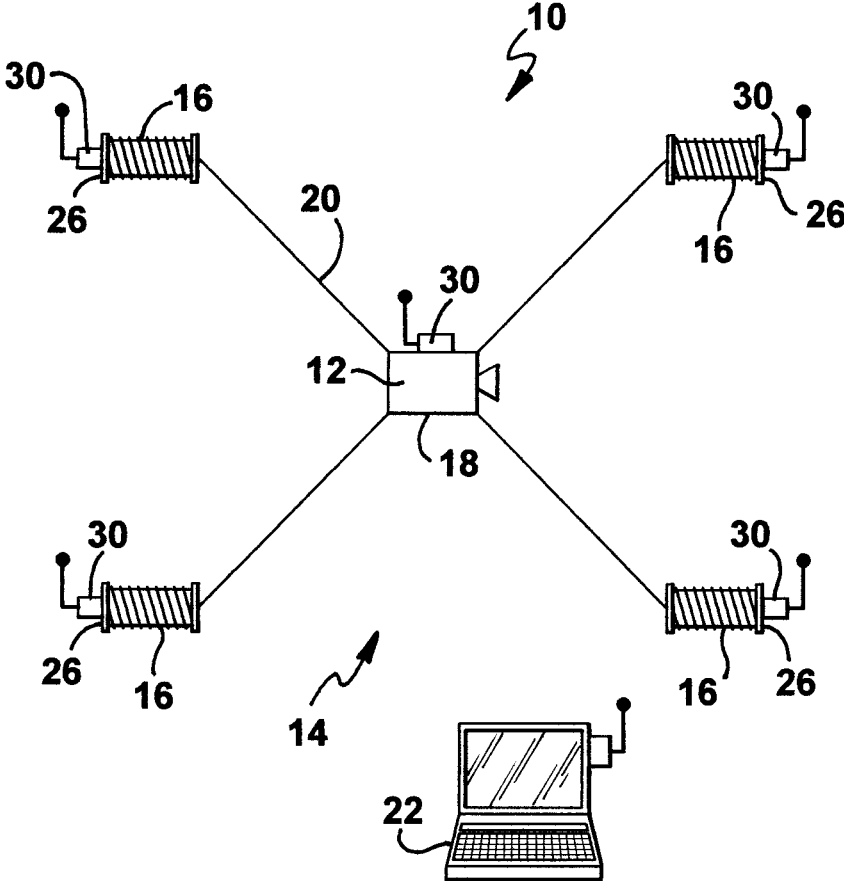

1

## APPARATUS AND METHOD FOR CALIBRATING AN AERIAL MOVEMENT SYSTEM

### RELATED APPLICATIONS

This application claims priority to U.S. Provisional Application No. 61/289,832 filed on Dec. 23, 2009, the entirety of which is hereby incorporated by reference.

### TECHNICAL FIELD

The present invention relates, in general, to a device and method for calibrating an aerial movement system, and in particular an aerial movement system that is suspending a camera.

### BACKGROUND

Aerial movement systems are useful in moving, for example, a camera over a large expanse such as a football field, or basketball court. While the remaining description generally discusses these aerial movement systems as they relate to cameras, it should be appreciated and understood that the present invention is not necessarily limited only to aerial movement systems with a camera.

In an aerial movement system, the suspended camera is typically controlled by an operator who utilizes a joy stick (or other similar controls) to position the camera around the expanse that the camera is suspended over. Through a computer, the joy stick communicates with motors and associated reels that release or draw in cable coupled to the camera. Thus, as the operator moves the joy stick, the computer communicates with the various motors and reels to release and/or draw in the appropriate amount of support lines and ultimately move the camera.

Unlike normal cameras, the camera operator for a camera suspended in an aerial movement system is typically located a distance away from the camera. Moreover, the camera is typically controlled through the use of a computer. Accordingly, it is important that the camera and associated equipment be calibrated accurately to provide precise data to the system for movement of the camera.

Current methods of calibrating aerial movements systems with cameras can be very time consuming and expensive, and they can be impractical for very large expanses and/or uses.

For example, in order to calibrate a four point aerial movement system, such as that disclosed in U.S. Pat. No. 6,873,355, typically, a triangle is created on the ground between the support towers. The support lines from each reel are pulled out, by hand, to each corner on the triangle. The length of support line is measured via a counter on the reel. All of the measurements are then entered into the computer that is used to control the movement of the camera.

This type of calibration method is very time consuming, as it relies upon people to walk and pull the support lines. In addition, it requires use of the ground below the expanse. This may be problematic, for example, if the ground is a football field and workers are painting lines or re-sodding or if an athletic team is practicing before a contest. Furthermore, given the method, inaccurate data may be provided given the catenary associated with support lines. Moreover, given the fact that this method requires people, it can be expensive as it can require at least three people and an entire day simply to calibrate the system. This cost can be

2

extremely large—especially if the system is constantly being deployed in a different location every week.

Other methods of calibrating such systems include using laser measuring devices and reflective surfaces. However, these types of methods similarly may require people to collect the data, and they similarly require use of the ground under the expanse. Furthermore, if the expanse is large, it may be difficult to use such measuring devices as a pointing a laser measuring tool over a long distance to a small reflective surface could prove to be difficult, as well as time consuming.

Therefore, the need exists for a calibration method and system that allows for a relatively quick and reliable calibration for an aerial movement system.

In addition, it would be beneficial if the calibration method and system was relatively inexpensive and did not require use of the ground or area below the expanse in which the aerial movement system is deployed.

### BRIEF SUMMARY OF THE INVENTION

The present invention is directed towards an aerial movement system that, generally, utilizes wireless position transceivers on the object and at various registration points to calibrate an aerial movement system.

In one embodiment of the invention, the invention includes an object to be suspended over an expanse and a plurality of reels disposed around the expanse. Each reel includes a support line coupled to the object. In addition, each reel from the plurality of reels is associated with a registration point. A computer is in communication with each of the reels. A first and second wireless position transceiver are disposed proximate a first and a second registration point. A third wireless position transceiver is disposed proximate the object. Finally, each wireless position transceiver is in communication with the computer.

In another embodiment of the invention, the invention is a method that includes the steps of disposing a plurality of reels around an expanse, wherein each reel includes a support line and a registration point; coupling the support lines to an object to be suspended over the expanse; associating a first wireless position transceiver with the object; associating a second wireless position transceiver with the registration point of a first reel; associating a third wireless position transceiver with the registration point of a second reel; and suspending the object above the expanse.

By utilizing wireless position transceivers, the calibration of the system may be accomplished through a computer. Moreover, by utilizing wireless position transceivers, the set up of the aerial movement system would also include setting up the calibration system, since the wireless position transceivers would be deployed along with the normal equipment associated with the set up of the aerial movement system. Accordingly, this should decrease the costs associated with setting up such a system by eliminating (or at least minimizing) the need for people to walk around and calibrate each support line by hand.

Further, such a system and method should not require any additional use of the ground below the expanse other than the time that is normally required to deploy (without calibrating) an aerial movement system. This should minimize the time needed to use the ground below the expanse to set up and calibrate the aerial movement system. In addition, this should minimize any scheduling conflicts associated with the calibration of the aerial movement system.

Moreover, a system and method such as those disclosed and described herein should also provide more accurate data

than the current calibration methods, as catenary and human error could be eliminated (or at least minimized) and the wireless transceivers would provide data that is more accurate and allow for more precise control of the object being moved through the aerial movement system.

Other benefits of the present invention will become readily apparent to those of ordinary skill in the art with this disclosure and the attached drawings before them.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become more fully apparent from the following description and appended claims, taken in conjunction with the accompanying drawings. Understanding that the accompanying drawings depict only typical embodiments, and are, therefore, not to be considered to be limiting of the scope of the present disclosure, the embodiments will be described and explained with specificity and detail in reference to the accompanying drawings as provided below.

FIG. 1 is a schematic illustration of an embodiment of an aerial movement system according to the present invention.

FIG. 2 is a schematic illustration of another embodiment of an aerial movement system according to the present invention.

#### DETAILED DESCRIPTION

It will be readily understood that the components of the embodiments as generally described and illustrated in the Figures herein could be arranged and designed in a wide variety of different configurations. Thus, the following more detailed description of various embodiments, as represented in the Figures, is not intended to limit the scope of the present disclosure, but is merely representative of various embodiments. While the various aspects of the embodiments are presented in drawings, the drawings are not necessarily drawn to scale unless specifically indicated.

The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

Reference throughout this specification to features, advantages, or similar language does not imply that all of the features and advantages that may be realized with the present invention should be or are in any single embodiment of the invention. Rather, language referring to the features and advantages is understood to mean that a specific feature, advantage, or characteristic described in connection with an embodiment is included in at least one embodiment of the present invention. Thus, discussion of the features and advantages, and similar language, throughout this specification may, but do not necessarily, refer to the same embodiment.

Furthermore, the described features, advantages, and characteristics of the invention may be combined in any suitable manner in one or more embodiments. One skilled in the relevant art will recognize that the invention can be practiced without one or more of the specific features or advantages of a particular embodiment. In other instances, additional features and advantages may be recognized in certain embodiments that may not be present in all embodiments of the invention.

Reference throughout this specification to “one embodiment,” “an embodiment,” or similar language means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, appearances of the phrases “in one embodiment,” “in an embodiment,” and similar language throughout this specification may, but do not necessarily, all refer to the same embodiment.

In an embodiment of the invention, an aerial movement system **10** includes an object **12** to be suspended over an expanse **14**. A plurality of reels **16** is disposed around the expanse **14**. In a preferred embodiment, the object **12** is a camera **18**, and the expanse **14** is a sporting surface (e.g., football field, basketball court, race track, etc.).

Each reel **16** includes a support line **20** being coupled to the object **12**. The support line **20** may or may not be able to transmit data from the object **12** (such as a video feed from a camera **18**, or data from a probe). The reels **16** are in communication with a computer **22**. The reels **16** may be in wireless communication with the computer **22**, or alternatively, the reels **16** may be in communication with the computer **22** through wires **24**.

In addition, each reel **16** is associated with a registration point **26**. As used herein, a reel **16** is associated with a registration point **26** by including a registration point **26** at some set position along the path of (but not necessarily on) the support line **20** between the reel **16** and the object **12**. Thus, for example, in some embodiments of aerial movement devices **10** a sheave **28** is used to redirect the support lines **20**. In such an embodiment, the registration point **26** may be on or adjacent the sheave **28**. In other embodiments, no sheave **28** is needed, as the reels **16** are disposed, for example, in the rafters above the expanse **14**. In such an embodiment, the registration point **26** may be disposed on or adjacent the reel **16**.

Disposed at each of the registration point **26** is a wireless position transceiver **30**. An additional wireless position transceiver **30** is located on the object **12**. The wireless position transceivers **30** are in wireless communication with the computer **22**. The wireless position transceivers **30** may be, for example, GPS transceivers, or LPM (Local Positioning Measurement) transceivers. It is contemplated that the transceivers may be GPS RTK, GPS WAAS, AGPS (Assisted GPS), LAAS (Local Area Augmentation System), GBAS (Ground Based Augmentation System), DGPS (Differential GPS) transceivers, or any other similar type of technology. These types of transceivers provide very accurate positioning locations, and thus would be beneficial to use in such a system. An additional benefit associated with the use of LPM transceivers is that they may provide real time “closed loop” monitoring of the object **12** and reels **16**, which allows for greater safety and control, as well as the ability to control, record and program movement of the object **12** and knowing its precise position. It will be appreciated that the transceiver can be comprised of a separate receiver and transmitter, or other similar components.

In use, the wireless position transceivers **30** disposed at registration points **26** communicate their respective positions to the computer **22**. At the same time, the wireless position transceiver **30** on the object **12** will also communicate its position to the computer **22**. The position of the object **12** in relation to the registration points **26** associated with the reel **16** may then be used to calibrate the aerial movement system **10**, and provide an accurate location of the object **12**. This position, in turn, will be able to be utilized by the computer **22** to calculate the appropriate

5

amount of support lines 20 to release and/or draw in from the reels 16 to move the object 12 to the desired location.

In another embodiment of the invention, the invention is a method of calibrating an aerial movement system comprising the steps of: disposing a plurality of reels around an expanse, wherein each reel includes a support line and a registration point; coupling the support lines to an object to be suspended over the expanse; associating a first wireless position transceiver with the object; associating a second wireless position transceiver with the registration point of a first reel; associating a third wireless position transceiver with the registration point of a second reel; and suspending the object above the expanse.

The method may also include the step of determining a position of the object and even further include the step of determining the position of the object in relation to the registration points of the first reel and the second reel.

A method according to the present invention may also include the step of communicating between a computer and each of the first, the second and the third wireless position transceivers.

Further, a method according to the present invention may also include the step of moving the object throughout the expanse.

Without further elaboration, it is believed that one skilled in the art can use the preceding description to utilize the present disclosure to its fullest extent. The examples and embodiments disclosed herein are to be construed as merely illustrative and not a limitation of the scope of the present disclosure in any way. It will be apparent to those having skill in the art that changes may be made to the details of the above-described embodiments without departing from the underlying principles of the disclosure provided herein. In other words, various modifications and improvements of the embodiments specifically disclosed in the description above are within the scope of the appended claims. Note that elements recited in means-plus-function format are intended to be construed in accordance with 35 U.S.C. § 112 ¶6. The scope of the invention is therefore defined by the following claims.

What is claimed is:

1. A method of moving a camera over an expanse comprising the steps of:

6

deploying a plurality of reels around a first expanse, each reel including a support line;

fixing a first wireless position transceiver when deploying a first reel, the first position transceiver being deployed in a first set position around the first expanse;

fixing a second wireless position transceiver when deploying a second reel, the second position transceiver being deployed in a second set position around the first expanse;

coupling the support lines to a camera to be suspended over the expanse;

associating a third wireless position transceiver with the camera;

suspending the camera above the expanse using the support lines;

transmitting a position of the first wireless position transceiver to the computer;

transmitting a position of the second wireless position transceiver to the computer;

transmitting a position of the third wireless transceiver to the computer;

recording the movement of the camera to selected, known locations over the expanse using the computer and the first, second and third wireless transceivers;

monitoring the reels using the computer as the camera is moved to the selected, known locations;

calibrating the movement of the camera over the entire expanse based upon recorded movement of the camera; and

controlling each reel to release and/or draw in each reel's respective support line using the computer in order to move the camera to any desired location over the expanse, the computer controlling an amount each reel releases and/or draws in each reel's respective support line using calculated amounts based calibrated movement of the camera and the positions received from the third wireless position transceiver over the expanse relative to the first and second wireless position transceiver;

wherein each of the aforementioned steps are repeated at a second expanse.

\* \* \* \* \*