



US008786567B2

(12) **United States Patent**
Reese

(10) **Patent No.:** **US 8,786,567 B2**
(45) **Date of Patent:** **Jul. 22, 2014**

(54) **SOFTWARE BASED TOUCHSCREEN**

(56) **References Cited**

(71) Applicant: **Charles Reese**, Grapevine, TX (US)

U.S. PATENT DOCUMENTS

(72) Inventor: **Charles Reese**, Grapevine, TX (US)

5,109,222 A *	4/1992	Welty	340/12.28
5,430,356 A	7/1995	Ference et al.	
5,844,888 A *	12/1998	Markkula et al.	370/255
6,515,586 B1 *	2/2003	Wymore	340/541
6,563,430 B1 *	5/2003	Kemink et al.	340/8.1
6,608,617 B2	8/2003	Hoffknecht et al.	
6,844,807 B2 *	1/2005	Inoue et al.	340/3.7
7,202,613 B2 *	4/2007	Morgan et al.	315/312
7,460,020 B2 *	12/2008	Reyes et al.	340/573.1
7,885,961 B2 *	2/2011	Horowitz et al.	707/737
8,531,135 B2 *	9/2013	Park et al.	315/312
2002/0001393 A1	1/2002	Jones et al.	
2002/0067144 A1	6/2002	Hoffknecht et al.	
2005/0125083 A1	6/2005	Kiko	
2006/0161270 A1	7/2006	Luskin et al.	
2007/0291483 A1 *	12/2007	Lys	362/227
2008/0030988 A1 *	2/2008	Williams	362/234
2008/0079604 A1	4/2008	Madonna et al.	
2008/0165538 A1 *	7/2008	Callahan	362/296
2009/0243517 A1 *	10/2009	Verfueth et al.	315/315
2009/0256811 A1	10/2009	Pasquariello	

(73) Assignee: **Production Resource Group, LLC**,
New Windsor, NY (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **13/785,086**

(22) Filed: **Mar. 5, 2013**

(65) **Prior Publication Data**

US 2013/0241885 A1 Sep. 19, 2013

Related U.S. Application Data

(62) Division of application No. 12/494,578, filed on Jun. 30, 2009, now Pat. No. 8,390,581.

(60) Provisional application No. 61/076,857, filed on Jun. 30, 2008.

(51) **Int. Cl.**
G06F 3/041 (2006.01)

(52) **U.S. Cl.**
USPC **345/173**; 362/227; 315/312

(58) **Field of Classification Search**
CPC G06F 3/04847; G06F 3/042; G06F 3/0488
USPC 345/173
See application file for complete search history.

* cited by examiner

Primary Examiner — Amare Mengistu


Assistant Examiner — Vinh Lam

(74) *Attorney, Agent, or Firm* — Law Office of Scott C. Harris, Inc.

(57) **ABSTRACT**

A software touchscreen displayed on start up for a LAN for an automated light. The software touchscreen is displayed by the software on initial startup, and later, after the initial startup, the same touchscreen is used for controlling the light.

8 Claims, 4 Drawing Sheets

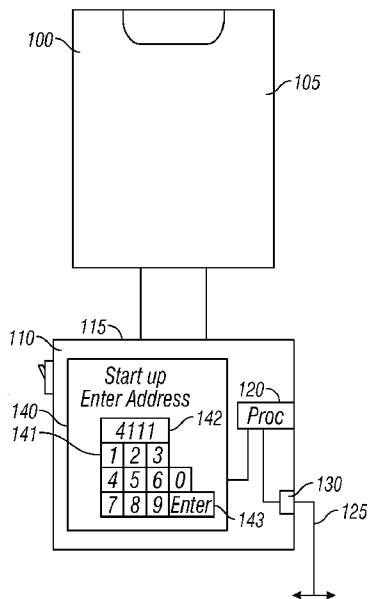

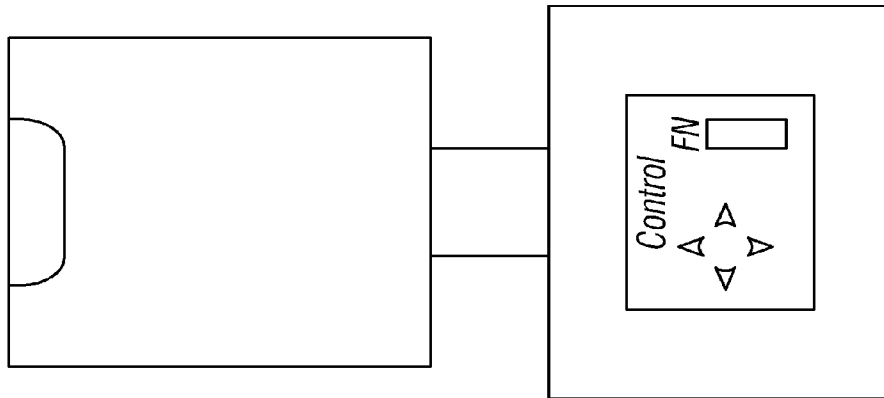


FIG. 1B

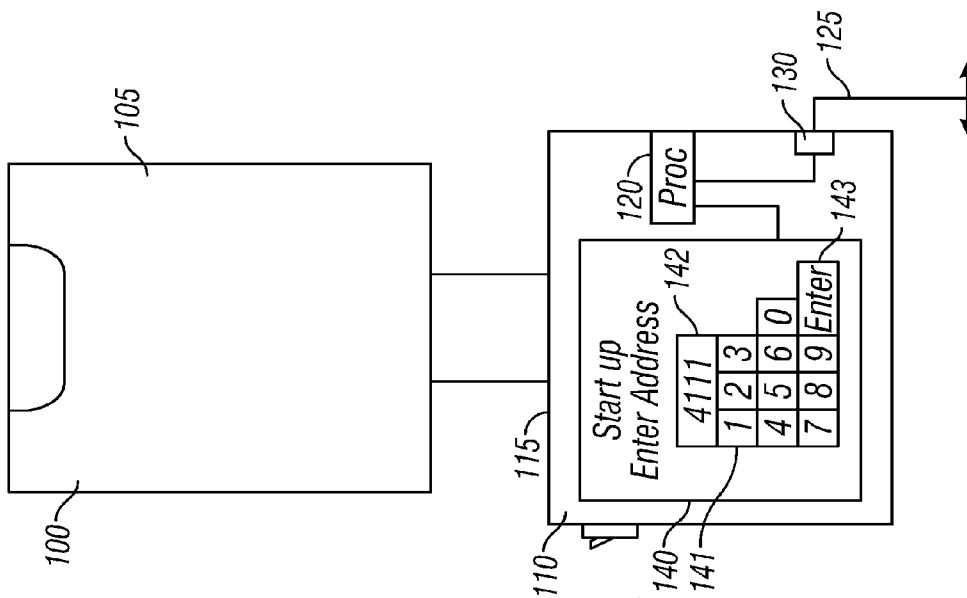


FIG. 1A

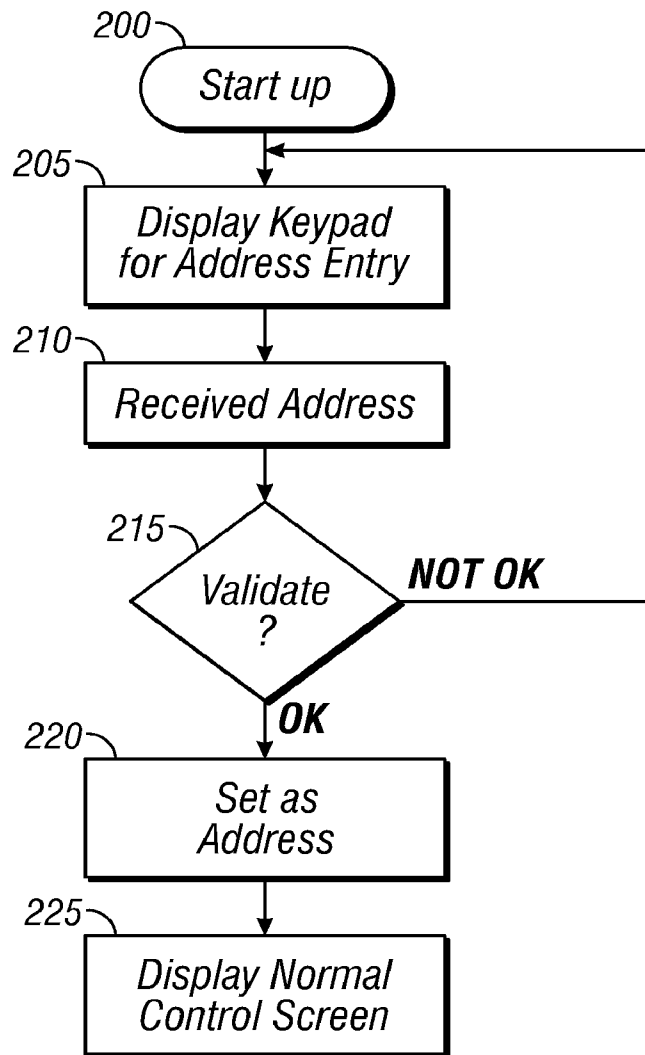


FIG. 2

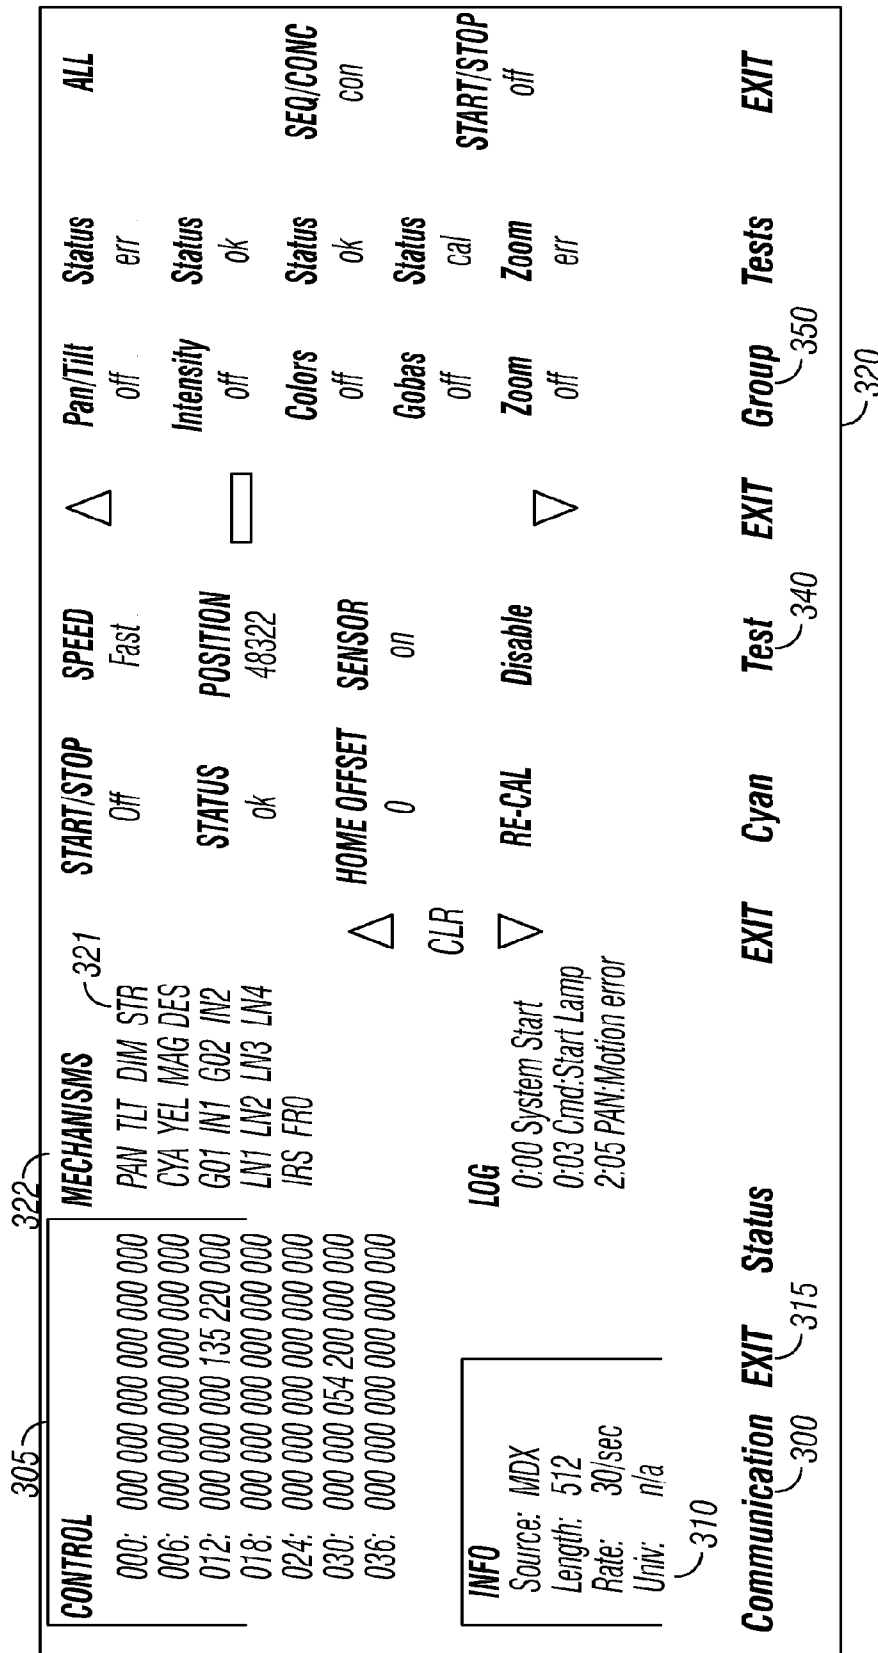


FIG. 3

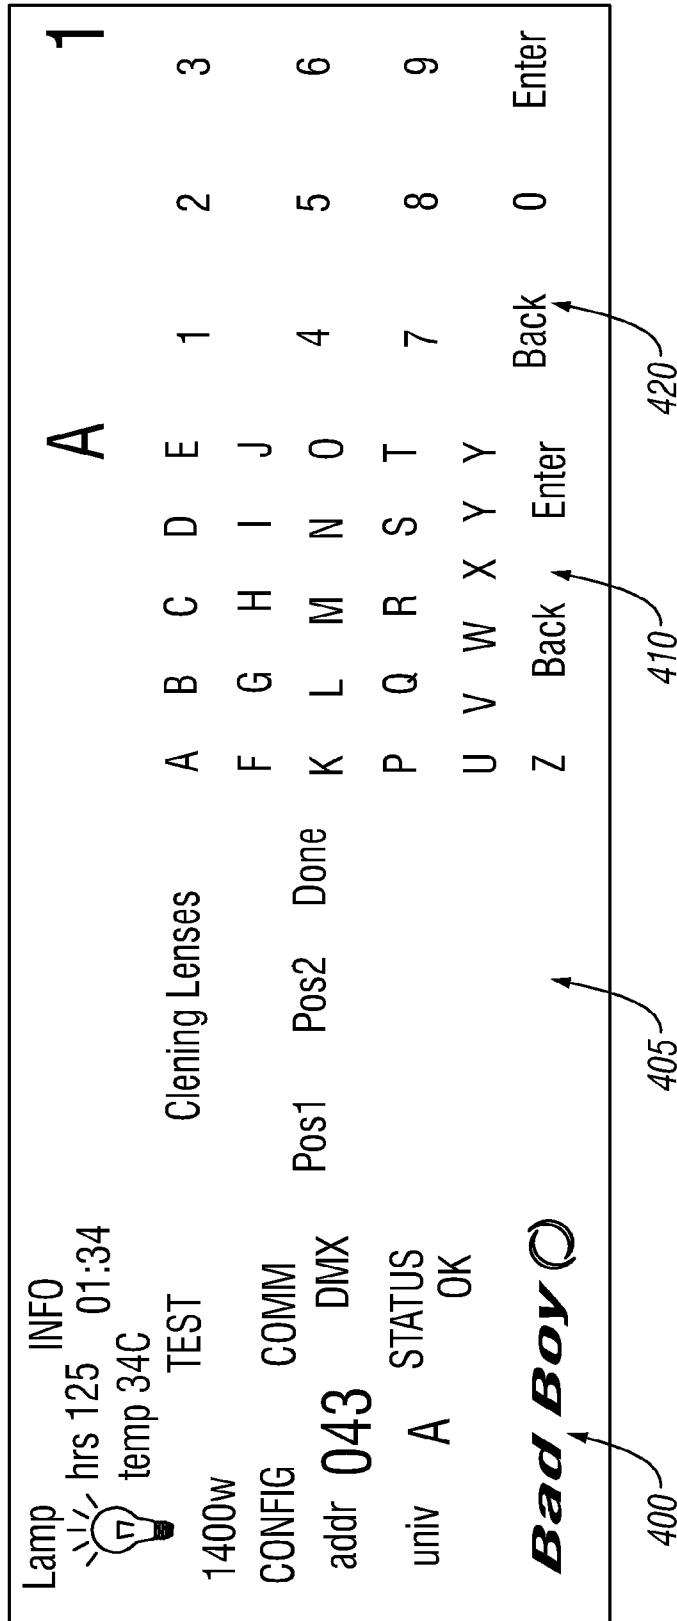


FIG. 4

SOFTWARE BASED TOUCHSCREEN

CROSS-REFERENCE OF RELATED APPLICATION

This application is a continuation application of U.S. Ser. No. 12/494,578 filed Jun. 30, 2009, now U.S. Pat. No. 8,390,581 issued Mar. 5, 2013, which claims priority from provisional application No. 61/076,857, filed Jun. 30, 2008, the entire contents of the disclosure of which is herewith incorporated by reference.

BACKGROUND

Commercial stage lighting is used in commercial environments and typically remotely controllable, and produces a light output greater than 1000 lumen. This kind of lighting is often set up and taken down as part of a show.

It may be advantageous to include controls that facilitate setting up the device. These devices are often connected to a network via a network connection. The network connection can be for example ethernet, DMX, ArtNet, or multiples.

When these lights are placed in a network, each light has an address that identifies it on the network.

SUMMARY

Embodiments a simplified system of entering an address that identifies a light on the network, using existing hardware. A special set of screens for a touchpad is defined.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

FIG. 1A shows a light with a software touchscreen, configured to operate only on initial startup;

FIG. 1B shows the light and the touch screen, as operable in other modes;

FIG. 2 shows a flowchart of software operations that control the lighting device;

FIG. 3 illustrates a set of tests for the touchscreen which can be carried out; and

FIG. 4 illustrates a series of functions which can be carried out on the touchscreen.

DETAILED DESCRIPTION

In an embodiment, a lighting fixture **100** may include a moving head **105** that is connected to a base **110**. The base **110** has a bottom surface **115** on which the base can rest, when the light is in its inverted position with the light facing up. The light may alternatively be hung from a truss, using a clamp that is attached to the surface **115**.

These lights may be stored in their stowed position, as shown, where the light part is essentially exactly parallel with the base part, and held into place in that exactly parallel position. For example, this may use the techniques described in our co-pending application 61/076,756, the entire contents of the disclosure of which is here with incorporated by reference. In this position, the light may be easier to transport, since it is stowed.

In operation, when the light is first turned on, the light initially comes up in the state shown in FIG. 1A. A light is software controlled by internal processor **120**, and can also receive commands over the network **125** into its network port **130**. Those commands may be interpreted by the processor **120**, and cause the light to take some action. In addition,

however, there is a local control **140**, which is a touchscreen which can be reconfigured by the processor **120**, and on which certain commands can be entered and executed by the processor **120**.

The processor runs the routine shown in the flowchart of FIG. 2. When startup is detected at **205**, the processor reconfigures the touchscreen to display a keypad for address entry at **205**. This keypad is shown as **141** in FIG. 1A. This screen may also display, for example, a message saying “start up mode—enter address”. The touchscreen includes the ability for a number of numbers to be entered. Each number that is entered may be echoed back on a numerical display **142**. For example, when the number four has been entered as the first digit, that number four is displayed as the first digit in **142**. This allows the user to see the address they have entered.

The user enters an address at **142**, then presses the enter key at **143** to enter that address as being the desired fixture address. The address is received by the processor at **210**, and to the extent possible validated at **215**. This may be, for example, a validation of whether this is an acceptable format address, in the right numerical range, and the like. If the light is already on the network, this may also check to see if there are any network conflicts with the entered address.

If the validation is not okay, the address screen is redisplayed, requiring the user to enter a new address. However, if validation is okay at **215**, the address is set at **220** as the fixture address, and the fixture will operate using that address thereafter.

Once this address has been properly set, the fixture reverts to its normal mode, in which the touchscreen **140** displays a normal control screen at **225**. This normal control screen is shown is **210** in FIG. 1B. The user can control conventional functions, such as lighting functions, e.g. lamp on/off; move the moving head; and other operation of the light to change its light producing characteristics.

This may facilitate the setup of lights, since it automatically provides the initial touchscreen capability at start up, thereby facilitating entering the original address in this way.

In normal operation when the light is being controlled, the touchscreen can have a number of different functions which can be used by the operator for carrying out various functions. The user can execute a “next” button to go between the screens or can select a screen from a main screen.

A screen **300** defines a communication test screen that displays a sequence of incoming bytes to the luminaire. The top part of the screen **305** displays a sequence of incoming control bytes. Color coding shows which of the values are changing. For example, in the screen **305**, in section **012**, one can see that the bytes **135** and **220** are both changing. This also includes an info section on the bottom as **310**. The info section represents the source, here DMX, the packet length here **312**, rate and other information. For DMX, there may be a number of different universes, so the specific universe can be selected. The user can also select to exit the selected screen **300** by selecting the exit button **315**.

The status screen at **320** uses color coding to indicate the real-time status of each mechanism including the operational error conditions. For example, different mechanisms can be displayed in color to indicate an error. The mechanisms including pan, tilt, the colors, gobos, and other can be selected in this way. For example, mechanisms such as tilt **320** can be I mean **321** can be displayed in green to show that the tilt mechanism is working properly. Mechanisms such as the pan, however, **322** may be displayed in red or yellow to show that there is an error.

The log shown as the bottom part of this display shows the different actions and any errors which have occurred. For example, this allows monitoring different statuses of the lamp.

Screen **340** shows the "Cyan test" which controls exercising the individual mechanisms using pre-test preset sequences and speed. The tests can be executed by turning "on" the test, in which case the status button shows the test as "on", otherwise showing the test as "off". The status is shown as "ok", at different speeds, which can be "fast" or "slow". The status of the test is also displayed here as "ok", but can also be "error".

This also allows recalibration, or disabling the function if the test fails.

Another control allows manual control of the mechanism using a graphical slider.

This screen also shows the current state of the mechanism including the motor position and a sensor input state.

While this is shown for one of the color wheels (here cyan) it should be understood that this can be shown for any of a plurality of different color wheels, or for any other mechanism.

Group tests at **350** can be carried out to select combinations of set functions to test. This also shows the operational status of each of the sets of functions. For example, pan and tilt, intensity, colors, gobos and zoom can be tested. The setting "off" means the test is not running. The status of the previous test is also shown, "ok", "error" or "cal", meaning that it needs calibration.

This allows one fixture to trigger other fixtures via the communication lines and also to show whether the fixture is being externally controlled.

The main screen, shown as **400** in FIG. **4** shows the overall fixture status, and provides interface to the other functions. For example, the shows the configured address, DMX universe, the lamp, lamp hours and temperature, as well as time up are all shown. It also allows selecting the other functions, shows the test, communication and status.

The cleaning lenses screen at **405** allows controlling the fixture head to a specified position that provides access to cleaning each surface of each moving lens. Here, there are only two positions, where these positions may be set according to characteristics of the luminaire.

The alpha keypad at **400** provides access to alphanumeric functions, and a numeric keypad at **420** provides access to numeric functions. This can be done for information such as addressing or labels via a soft keypad.

Although only a few embodiments have been disclosed in detail above, other embodiments are possible and the inventors intend these to be encompassed within this specification. The specification describes specific examples to accomplish a more general goal that may be accomplished in another way. This disclosure is intended to be exemplary, and the claims are intended to cover any modification or alternative which might be predictable to a person having ordinary skill in the art. For example, other commands and command forms can be used. Other screens can be shown on the touchscreen. Other forms of lighting devices can be used.

Those of skill would further appreciate that the various illustrative logical blocks, modules, circuits, and algorithm steps described in connection with the embodiments disclosed herein may be implemented as electronic hardware, computer software, or combinations of both. To clearly illustrate this interchangeability of hardware and software, various illustrative components, blocks, modules, circuits, and steps have been described above generally in terms of their functionality. Whether such functionality is implemented as

hardware or software depends upon the particular application and design constraints imposed on the overall system. Skilled artisans may implement the described functionality in varying ways for each particular application, but such implementation decisions should not be interpreted as causing a departure from the scope of the exemplary embodiments of the invention.

The various illustrative logical blocks, modules, and circuits described in connection with the embodiments disclosed herein, may be implemented or performed with a general purpose processor, a Digital Signal Processor (DSP), an Application Specific Integrated Circuit (ASIC), a Field Programmable Gate Array (FPGA) or other programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. A general purpose processor may be a microprocessor, but in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine. A processor may also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration. These devices may also be used to select values for devices as described herein.

The steps of a method or algorithm described in connection with the embodiments disclosed herein may be embodied directly in hardware, in a software module executed by a processor, or in a combination of the two. A software module may reside in Random Access Memory (RAM), flash memory, Read Only Memory (ROM), Electrically Programmable ROM (EPROM), Electrically Erasable Programmable ROM (EEPROM), registers, hard disk, a removable disk, a CD-ROM, or any other form of storage medium known in the art. An exemplary storage medium is coupled to the processor such that the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium may be integral to the processor. The processor and the storage medium may reside in an ASIC. The ASIC may reside in a user terminal. In the alternative, the processor and the storage medium may reside as discrete components in a user terminal.

In one or more exemplary embodiments, the functions described may be implemented in hardware, software, firmware, or any combination thereof. If implemented in software, the functions may be stored on or transmitted over as one or more instructions or code on a computer-readable medium. Computer-readable media includes both computer storage media and communication media including any medium that facilitates transfer of a computer program from one place to another. A storage media may be any available media that can be accessed by a computer. By way of example, and not limitation, such computer-readable media can comprise RAM, ROM, EPROM, CD-ROM or other optical disk storage, magnetic disk storage or other magnetic storage devices, or any other medium that can be used to carry or store desired program code in the form of instructions or data structures and that can be accessed by a computer. Also, any connection is properly termed a computer-readable medium. For example, if the software is transmitted from a website, server, or other remote source using a coaxial cable, fiber optic cable, twisted pair, digital subscriber line (DSL), or wireless technologies such as infrared, radio, and microwave, then the coaxial cable, fiber optic cable, twisted pair, DSL, or wireless technologies such as infrared, radio, and microwave are included in the definition of medium. Disk and disc, as used herein, includes compact disc (CD), laser disc, optical

5

disc, digital versatile disc (DVD), floppy disk and blu-ray disc where disks usually reproduce data magnetically, while discs reproduce data optically with lasers. Combinations of the above should also be included within the scope of computer-readable media.

Also, the inventors intend that only those claims which use the words “means for” are intended to be interpreted under 35 USC 112, sixth paragraph. Moreover, no limitations from the specification are intended to be read into any claims, unless those limitations are expressly included in the claims. The computers described herein may be any kind of computer, either general purpose, or some specific purpose computer such as a workstation. The programs may be written in C, or Java, Brew or any other programming language. The programs may be resident on a storage medium, e.g., magnetic or optical, e.g. the computer hard drive, a removable disk or media such as a memory stick or SD media, or other removable medium. The programs may also be run over a network, for example, with a server or other machine sending signals to the local machine, which allows the local machine to carry out the operations described herein.

Where a specific numerical value is mentioned herein, it should be considered that the value may be increased or decreased by 20%, while still staying within the teachings of the present application, unless some different range is specifically mentioned. Where a specified logical sense is used, the opposite logical sense is also intended to be encompassed.

The previous description of the disclosed exemplary embodiments is provided to enable any person skilled in the art to make or use the subject matter of the claims and the embodiments and the claims. Various modifications to these exemplary embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without departing from the spirit or scope of the invention. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

What is claimed is:

1. A method, comprising:

at initial startup of a lighting fixture, automatically displaying information on a reconfigurable screen of the lighting fixture that allows entry of an entered address to be

6

used by the lighting fixture, receiving information about the address, and configuring the lighting fixture to use said entered address; and

upon receiving information indicative of said entered address having been entered by said entry, reconfiguring said screen to a second screen control other functions of the light and not showing said address on said second screen.

2. The method as in claim 1, wherein said other functions of the light include operation of the light to change its light producing characteristics.

3. The method as in claim 1, further comprising verifying an address of the light, and not reconfiguring said screen until said address has been verified.

4. The method as in claim 1, wherein said receiving information comprises receiving information on a touchscreen.

5. A computer program product, comprising a non-transitory, computer usable medium having a computer readable program code embodied therein, said computer readable program code adapted to be executed to implement operating a lighting fixture, said computer program product operating to: at initial startup of a lighting device, automatically displaying information on a reconfigurable screen that accepts entry of an entered address to be used by the lighting device;

receiving said entry of said entered address into a memory of said lighting device as an address of said lighting device and using said entered address as the address of the lighting device; and

upon receiving information indicative of said entered address having been entered, reconfiguring said screen to a second screen to control other functions of the lighting device and not showing said address on said second screen.

6. The product as in claim 5, wherein said other functions of the lighting device include operation of the lighting device to change its light producing characteristics.

7. The product as in claim 6, wherein said other functions of said light allow testing different functions of the lighting device.

8. The product as in claim 7 wherein said testing comprises testing the function of different moving parts of the lighting device.

* * * * *