



US008801324B2

(12) **United States Patent**  
**Kempf**

(10) **Patent No.:** **US 8,801,324 B2**

(45) **Date of Patent:** **Aug. 12, 2014**

(54) **CABLE SLIDER WITH SYMMETRIC PIECES**

(75) Inventor: **James Kempf**, Wallkill, NY (US)

(73) Assignee: **Production Resource Group, L.L.C.**,  
New Windsor, NY (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 395 days.

(21) Appl. No.: **13/209,643**

(22) Filed: **Aug. 15, 2011**

(65) **Prior Publication Data**

US 2012/0042481 A1 Feb. 23, 2012

**Related U.S. Application Data**

(60) Provisional application No. 61/374,553, filed on Aug. 17, 2010.

(51) **Int. Cl.**

**F16D 1/00** (2006.01)

**F16G 15/06** (2006.01)

**F16G 15/04** (2006.01)

**F16G 11/00** (2006.01)

(52) **U.S. Cl.**

CPC ..... **F16G 15/06** (2013.01); **F16G 15/04** (2013.01); **F16G 11/00** (2013.01)

USPC ..... **403/340**; 403/339; 403/331; 403/381; 403/393

(58) **Field of Classification Search**

CPC ..... F16L 3/00; F16L 3/14; F16G 15/00; F16G 15/04; F16G 15/06; F16G 11/00

USPC ..... 403/339, 340, 331, 381, 393; 248/693; 24/116 R

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,427,848	A *	9/1922	Rankin	.....	24/592.11
1,837,787	A *	12/1931	Meiser	.....	405/279
3,350,752	A *	11/1967	Plummer	.....	24/584.1
3,790,993	A *	2/1974	Gilles et al.	.....	24/399
4,621,393	A *	11/1986	Ambal	.....	24/171
4,922,586	A *	5/1990	Robson	.....	24/399
5,044,583	A *	9/1991	Daigle et al.	.....	248/62
5,261,257	A *	11/1993	Collier	.....	70/456 R
5,653,411	A *	8/1997	Picco et al.	.....	248/74.1
5,735,024	A *	4/1998	Ortiz	.....	24/573.11
6,915,870	B2 *	7/2005	Sugiyama et al.	.....	180/69.4
7,610,783	B2 *	11/2009	Rudduck et al.	.....	70/277
7,636,986	B2 *	12/2009	Sorensen	.....	24/130
7,857,551	B2 *	12/2010	Heindl	.....	405/279
8,353,485	B2 *	1/2013	Hjerpe	.....	70/277
2003/0089829	A1 *	5/2003	Brandzel et al.	.....	248/68.1
2007/0077127	A1 *	4/2007	Berlin	.....	405/220
2007/0138353	A1 *	6/2007	Guthke et al.	.....	248/75
2007/0246616	A1 *	10/2007	Budagher	.....	248/68.1
2008/0145154	A1 *	6/2008	Heindl et al.	.....	405/279
2008/0175674	A1 *	7/2008	Heindl	.....	405/278
2010/0031479	A1 *	2/2010	Apicella	.....	24/129 R
2011/0114802	A1 *	5/2011	Hjerpe	.....	248/68.1
2012/0036684	A1 *	2/2012	Tilman et al.	.....	24/399

\* cited by examiner

Primary Examiner — William Gilbert


Assistant Examiner — Alp Akbasli

(74) *Attorney, Agent, or Firm* — Law Office of Scott C. Harris, Inc.

(57) **ABSTRACT**

A device which can slide up and down on a chain or cable, can be loosened to attach to the chain or cable, but does not have any parts that come free when the part is loosened.

**17 Claims, 6 Drawing Sheets**

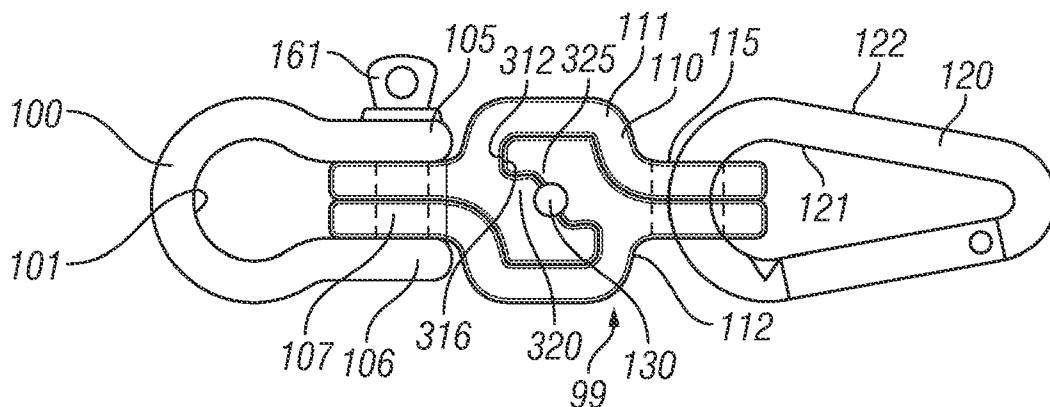

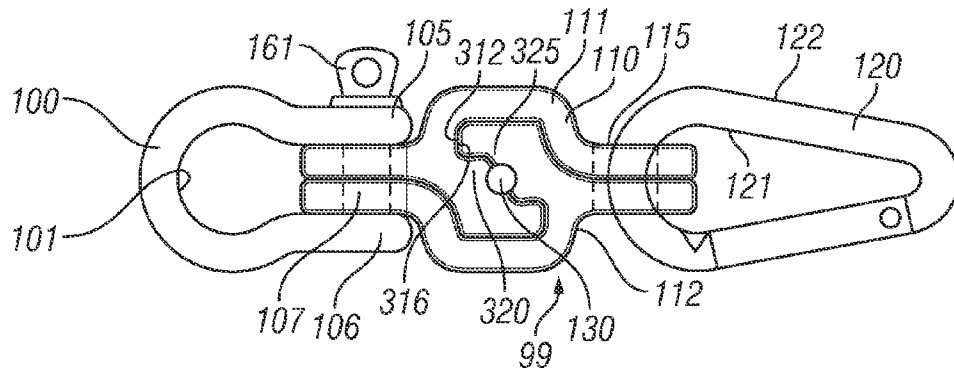


Fig. 1

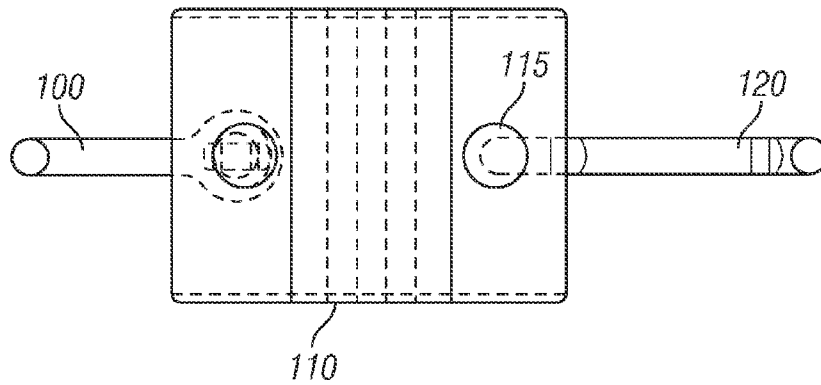


Fig. 2

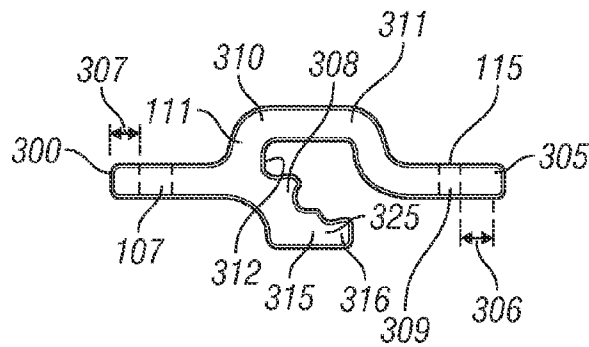


FIG. 3

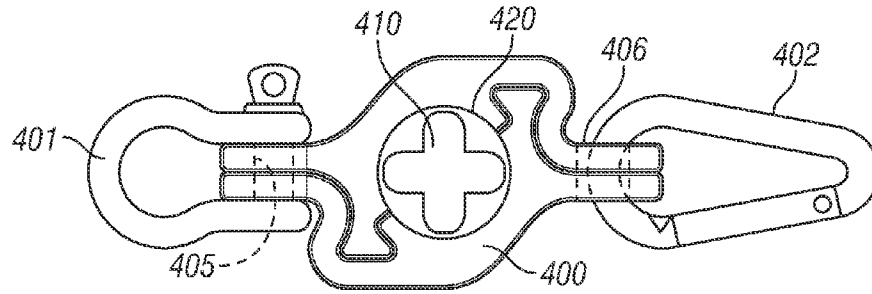


Fig. 4

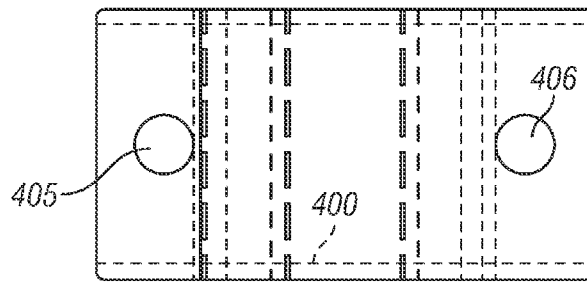


Fig. 5

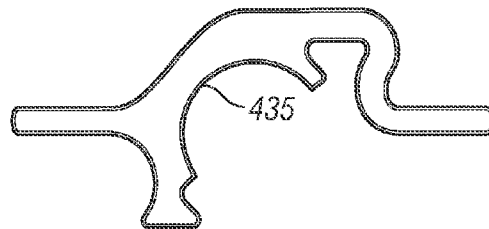


FIG. 6

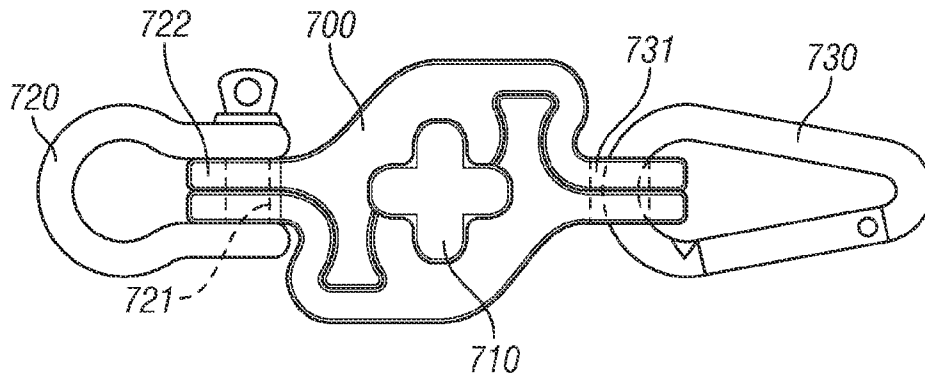


Fig. 7

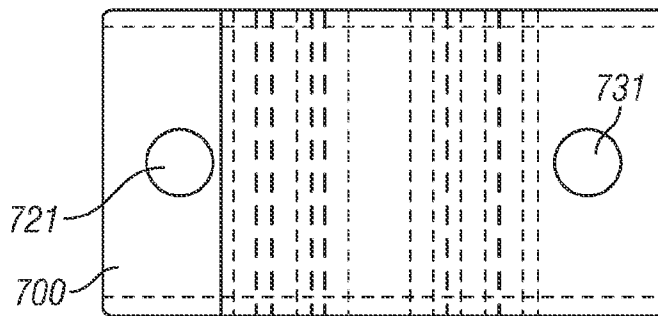


Fig. 8

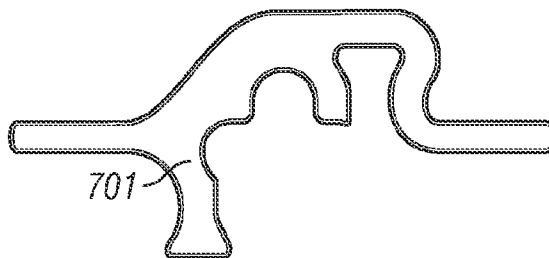


FIG. 9

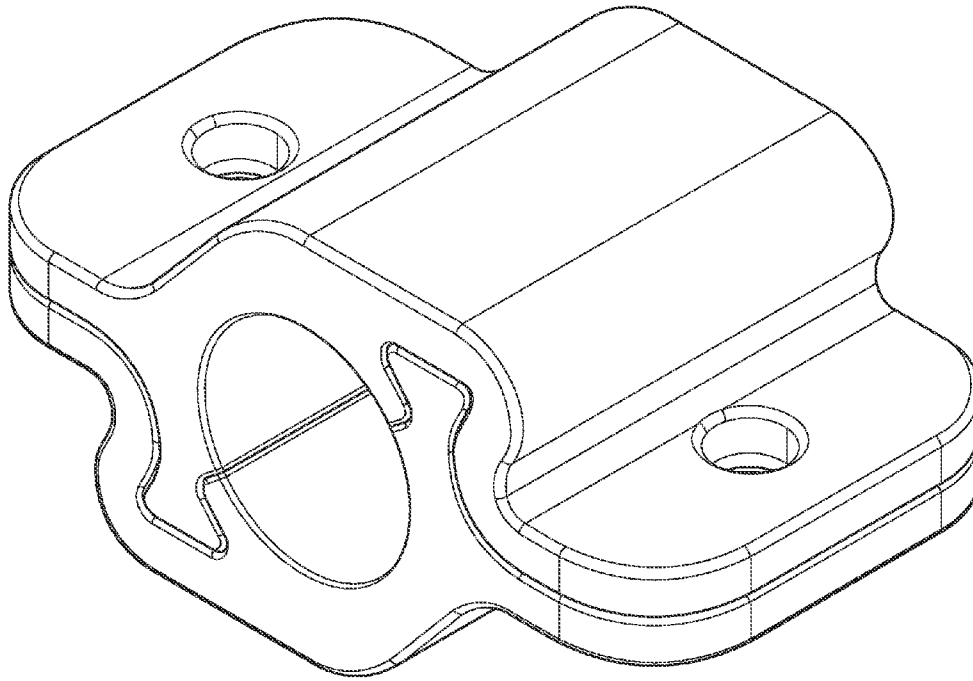


FIG. 10

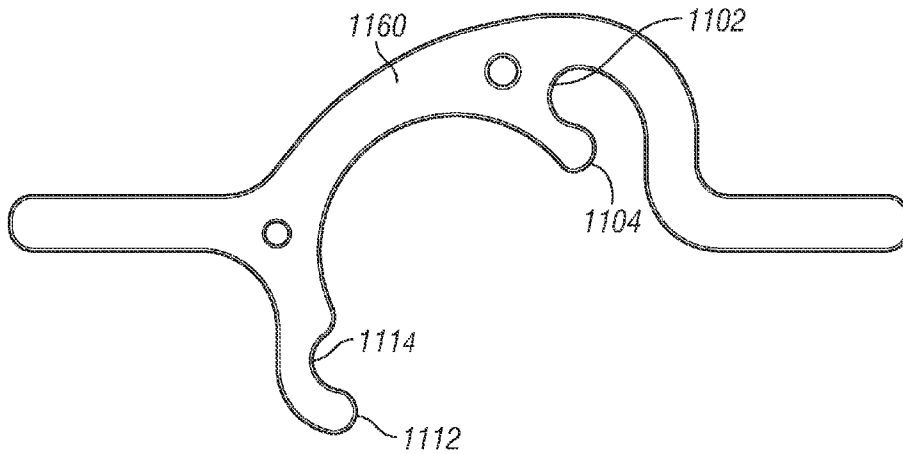


FIG. 11

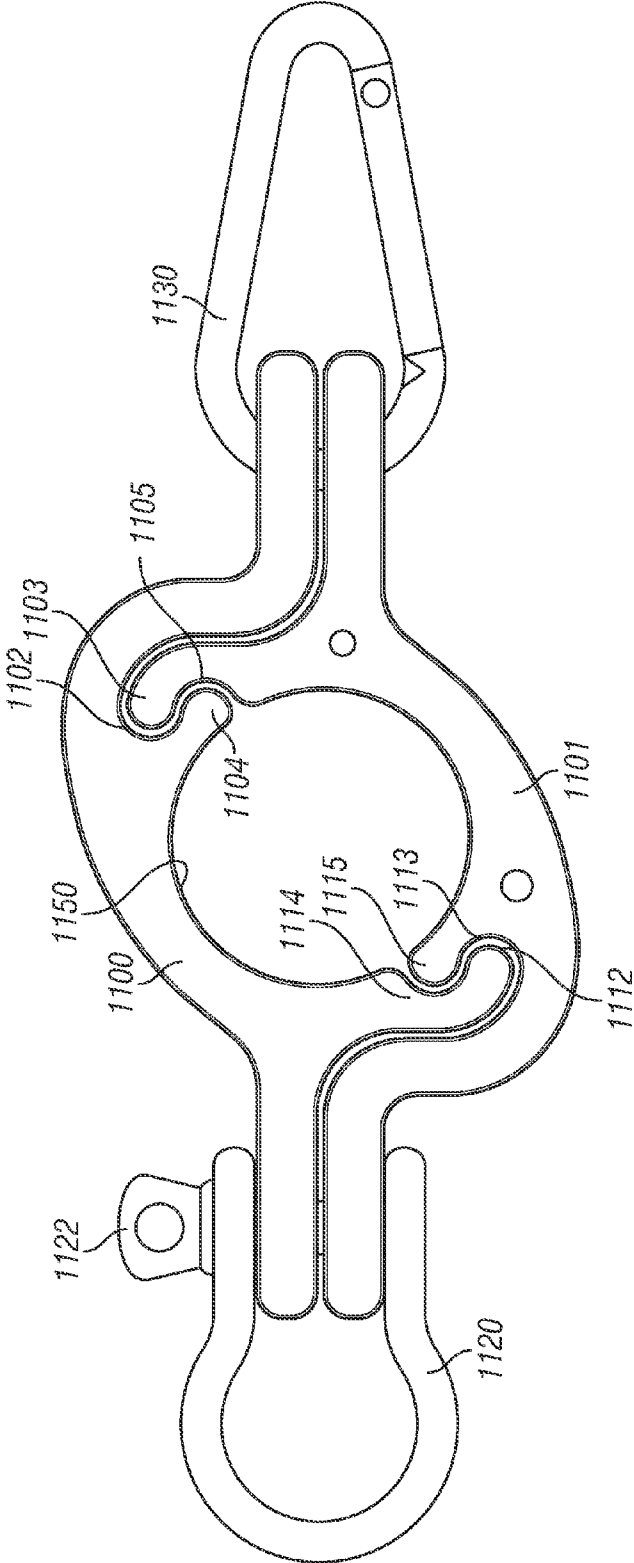


FIG. 12

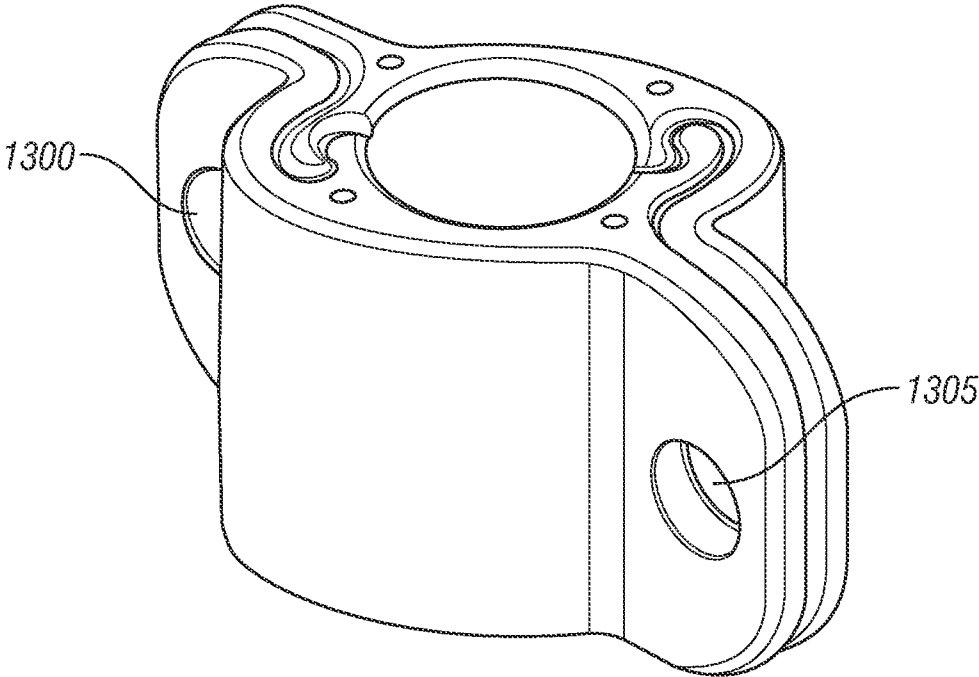


FIG. 13

## CABLE SLIDER WITH SYMMETRIC PIECES

This application claims priority from provisional application No. 61/374,553, filed Aug. 17, 2010, the entire contents of which are herewith incorporated by reference.

## BACKGROUND

For concert tours, industrial shows, and Broadway shows, it has become common to festoon electrical cables vertically up tensioned moving chain hoist chains and which wire ropes.

Existing plastic chain/cable sliders are two piece units joined with multiple fasteners and requiring tools for installation or removal. This can be cumbersome since these existing chain sliders are often changed out by stagehands while they are installed high up on trusses, lifts, or ladders where loose tools and parts are a hazard.

## SUMMARY OF THE INVENTION

The new embodiment forms a chain/cable slider that has two matching halves that dovetail together with no tools or loose fasteners.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a plan view according to an embodiment of an assembled device according to the present system;

FIG. 2 shows a front view of the device, showing the central portion and the two ends;

FIG. 3 shows a part making up one of the single sides of two sandwich parts;

FIGS. 4-6 respectively show plan view, front view and single piece for a second embodiment in which the central portion sized for a chain but allowing the chain to rotate; and

FIGS. 7-9 show another embodiment in which the central portion is sized for a nonrotating chain;

FIG. 10 illustrates a perspective of the FIG. 4 embodiment; and

FIGS. 11-13 show an alternative embodiment with the central portion sized for a chain, in which the surfaces are differently shaped.

## DETAILED DESCRIPTION

FIG. 1 shows a first embodiment which is a basic embodiment for sliding on a cable. A first device **99** is used in the first embodiment. The device can be formed of a shackle, dogclip and/or carabiner **100**, as a first locking device at a first end of the device **99**. The first locking device **100** has an inner surface **101** that holds a wire rope or chain that supports the device.

The nonstructural and of locking device **100** forms two spaced apart arms **105**, **106** with a central shaft **107** through which a screw **161** is loosened and tightened in a way that locks the arms **105** **106** and attaches the arms to the main structural cable piece **110**. The other end of the cable piece **110** is also attached to a second carabiner **120**. According to an embodiment, the cable piece **110** has a portion of the carabiner fed through openings **115** in the cable piece, so that the carabiner **120** cannot be separated from the cable piece **110** using a screw. In addition, the carabiner **120** can freely pivot in multiple different directions of freedom relative to the cable piece **110** and its outer surfaces **121**, **122** can move within the inner surface **115** of the cable piece **110**.

The cable piece **110** has a body which is formed of two attached and symmetrical parts **111**, **112**. Both of the sym-

metrical parts have a section of a hole therein, so that when the two symmetrical parts are brought together, it forms a through hole **130** through which a cable can slide, but within which the cable is held captive. In different embodiments, the through hole can be different sizes, for example the through hole can be sized for a  $\frac{1}{8}$  inch or  $\frac{1}{16}$  inch cable.

FIG. 2 shows a side view showing the different parts including the first locking device **101** and, the second carabiner **120** at the other end, and the body/cable piece **110** in the center.

FIG. 3 shows a cross-section of the first portion **111** of the cable piece, that couples with another portion **112** of the cable piece. The two portions together form a through hole **130** which allows cable to pass through that hole. The two parts may be exactly the same part and connect together. Each end includes a tip. The first tip **300** includes the through hole **107** therein which receives the screw from the first locking device. The second end **305** also includes a corresponding hole portion **309** which forms the hole **115** shown in FIG. 1. The holes in the two tips may be at symmetrical locations, that is the distance **306** between one end of the hole and the tip may be the same as the distance **307** between one end of the hole **107** and the tip **300**.

In addition, this "piece" forming the central portion has a connection area **310** that extends between the first tip and **300** and the second tip and **305**. This connection piece is a structural piece that forms the structural connection between the first and second ends. As shown in FIG. 3, this piece juts upward at the central area **311**. By jutting upward, it also forms an internal cavity **312**. There is also a portion referred to herein as the jutting end **315** that juts down from the first tip end, towards the second tip end but does not reach to the second tip end. This jutting down portion has inner surfaces, the first part of the inner surface forming the cavity portions **312**. The tip end of the jutting portion **316** is symmetrical to the shape of the cavity **312**, so that if a second portion like the first portion is attached to the first portion, the tip end **316** of the second portion extends into and fits into the cavity **312**.

In addition, the portion has convex and concave curved surfaces. For example, there is a convex surface **320** and a concave curved surface **325**. FIG. 1 shows how when two of these portions are connected together, the tip end **316** of one of these portions fits into the cavity **312** of the other of the portions. In addition, the convex portion **320** fits into a corresponding concave portion **325** of the other piece and vice versa. In this way, the two pieces are held together, but form the through hole **130**.

Because of the structural support in the center when the two pieces are coupled together, one embodiment requires only a structural support between the holes at one end. FIG. 1 shows that there is a bolt holding the portions at **107**, but no bolt holding the other portions at the other end **115**.

In operation, therefore, the two parts **111** **112** can be easily separated by opening the screw **161**. This screw **161** may be of a type that does not require any tools for tightening and loosening. The screw is loosened, but remains captive in its location so that no parts can fall. Moreover, loosening the screw preferably only removes the screw from a portion of the opening so that the end **100** remains attached to the body **110**, but allows the two parts **111**, **112** to separate from one another. In this configuration, the parts can be separated, and the cable can be placed through the through hole **130**. The parts can then be reconnected, and the screw retightened. No tools are necessary for this operation, and no parts can come loose from this operation. Accordingly, for example the cara-



biner **120** can be attached onto a support during the operation, so that no parts can fall while the device **99** is being attached onto the cable.

This embodiment shown in FIGS. **1-3** is a cable slider, where there is a small hole **130** and the cable can only slide through the inner surfaces forming that hole.

A second embodiment, shown in FIGS. **4-6** shows a chain slider that allows movement along a chain rather than along the cable as in the embodiment of FIG. **1** through **3**. In this embodiment, the cable piece **400** includes a circular center hole **420**, large enough to hold a chain, shown in cross-section as a plus shape **410**. In this embodiment, the device may be controlling for example a chain motor with a lift chain. The chain motor has an electrical connection with an electrical cable. The slider **420** passively slides up and down the chain due to tension/slack on the electrical cable as the chain motor moves.

As in the first embodiment, the chain portion **400** forms a central body which is connected at one end to a fixed portion **401** that connects together with the screw, and is connected at the other end to a freely pivotable portion **402** formed of a carabiner. The part **401** does not pivot, so loads attached at the part **401** cannot cause the part **401** to pivot. Loads attached at the **402** end, however, do cause that end to pivot.

FIG. **5** shows a front view of the device, showing the center portion **400**, the hole **405** through which the first end **401** is attached and the hole **406** through which the second end is attached.

As in the first embodiment, FIG. **6** shows how the center portion in the second embodiment is formed from two symmetrical pieces.

A third embodiment, shown in FIGS. **7-9**, is a nonrotating model, which does not allow the chain to rotate. In this embodiment, the center portion **700** has a substantially plus shaped central portion **710** which is captured around the chain end to rotate with the chain; so that if the chain rotates, which is rare, the device also rotates. As in the other embodiments, a first end **720** includes a non-rotatable holder, that is attached through a through hole **721** by a screw **722**. The second end includes a rotatable carabiner **730** which is attached through the through hole **731**, and can freely rotate in any desired direction. FIG. **8** shows a front view of the center portion **700**, showing the holes **721** and **731**. As in the other embodiments, the center portion is symmetrical, so that either side can attach to either the fixed portion or the pivotable portion.

FIG. **9** shows a single plate **701** which is a symmetrical plate forming the portions.

Each of these embodiments have the advantage that their center part is formed by two identical parts that are placed against one another. For example, in the embodiment of FIG. **7-9**, the two parts are placed against one another. In the FIG. **4-6** embodiment, a round center portion **420** is placed within a round hole formed by the two opposing semi-spherical surfaces **435**.

FIG. **10** shows a perspective view of the two parts from FIG. **6** pressed against one another, forming the central hole into which the rotating part can be inserted.

FIGS. **11-13** show an alternative embodiment in which more of the surfaces are curved. The FIG. **11-13** embodiment has a comparable sized inner cavity to that in the FIG. **4-6** embodiment, however it should be understood that this embodiment can also be formed using the shape of FIG. **1-3** or **7-10**. FIG. **11** shows the single piece **1100** which forms half of the assembled part. This single piece, like the other embodiments, includes a concave surface **1102**, and a convex surface **1104** at the top part of the device, and also includes the convex surface **1112** and concave surface **1114** at the bottom

part of the device. FIG. **12** shows two of the basic parts **1100**, **1101** connected together. As in the other embodiments, the concave surfaces mate with respective convex surfaces in the assembled device, so the concave surface **1102** mates with the corresponding convex surface **1103** on the part **1101**. In a similar way, the convex surface **1104** mates with a corresponding concave surface **1105**, part **1101**. In a similar way, the convex surface **1112** mates with a corresponding concave surface **1113**, and the concave surface **1114** mates with a corresponding convex surface **1115**.

As in the other embodiments, this device may include a shackle **1120** that is screwed in via a captive screw **1122** and where the screw remains captive when loosened. When this shackle has been removed or loosened, the parts can slide relative to one another to separate the two parts **1100**, **1101**, and allow access to the opening **1150**. The device may also include a carabiner shown as **1130** at the other end. FIG. **13** shows the fully assembled device, however without the shackle **1120** and carabiner **1130**. In this embodiment, the parts include more highly curved surfaces, and this embodiment may provide even better connection than the other embodiments.

In an embodiment, these devices can be machined on a CNC water jet machine, or can be injection molded.

The above has described shackles and carabiner as being placed into the respective holes in the device such as **1300**, **1305**. However, any connection part or any part of any type whatsoever can be placed through these holes.

Although only a few embodiments have been disclosed in detail above, other embodiments are possible and the inventors intend these to be encompassed within this specification. The specification describes specific examples to accomplish a more general goal that may be accomplished in another way. This disclosure is intended to be exemplary, and the claims are intended to cover any modification or alternative which might be predictable to a person having ordinary skill in the art. For example, other kinds and sizes of chain or cable can be used.

Also, the inventor intends that only those claims which use the words "means for" are intended to be interpreted under 35 USC 112, sixth paragraph. Moreover, no limitations from the specification are intended to be read into any claims, unless those limitations are expressly included in the claims.

Where a specific numerical value is mentioned herein, it should be considered that the value may be increased or decreased by 20%, while still staying within the teachings of the present application, unless some different range is specifically mentioned.

The previous description of the disclosed exemplary embodiments is provided to enable any person skilled in the art to make or use the present invention. Various modifications to these exemplary embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without departing from the spirit or scope of the invention. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

What is claimed is:

1. A device, comprising:

a first piece made of structural material, having a first tip end with a hole therein near a distal end of the first tip end, said first tip end facing in a first direction, and said first piece having a second tip end facing in a second direction opposite said first direction, said second tip end also having a hole therein near a distal portion, and a

5

position of the hole on the first tip end spaced from said distal end by a first distance, and a position of the hole in said second tip end spaced from said distal end of the second tip end by a second distance, said second distance being the same as said first distance, and said hole in said second tip end being at the same position relative to an end of said tip end as a position of the hole in said second tip end,

and said first piece also having a first connection area between said first tip end and said second tip end, which forms a structural connection between said first tip end and said second tip end, and a second jutting end, which extends in the same direction as said first connection area, but does not extend all the way to said second tip end, said second jutting end having first inner surfaces that define both a concave surface and a convex surface, and inner surfaces that define a portion of a through hole; and

further comprising a second piece made of structural material, having a first tip end with a hole therein near a distal portion of the first tip end, said first tip end facing in a first direction, and said second piece having a second tip end facing in a second direction opposite said first direction, said second tip end also having a hole therein near a distal portion, and a position of the hole on the first tip end spaced from said distal end by a first distance, and a position of the hole in said second tip end spaced from said distal end of the second tip end by a second distance, said second distance being the same as said first distance, and said hole in said second tip end being at the same position relative to an end of said tip end as a position of the hole in said second tip end,

and said second piece also having a first connection area between said first tip end and said second tip end, which forms a structural connection between said first tip end and said second tip end, and a second jutting end, which extends in the same direction as said first connection area, but does not extend all the way to said second tip end, said second jutting end having first inner surfaces that define both a concave surface and a convex surface, and inner surfaces that define another portion of said through hole, where said concave surface of said second piece mates with said convex surface of said first end, and said convex surface of said second piece mates with said concave surface of said first piece, and where said surfaces defining said through hole mate with said surfaces defining said through hole of said first piece, where said first and second piece collectively define a complete through hole.

2. The device as in claim 1, wherein said hole at said first tip end of said first piece matches in location with said hole at said second tip end of said second piece to form a first hole and said hole at said second tip end of said first piece matches in location with said hole at said first tip end of said second piece to form a second hole.

3. A device as in claim 2, further comprising a first fixed structural support attached to said first holes in said first and second piece, connected through said first hole in both said first and second piece, and said first fixed structural support being unmovable when connected between said first hole in said first piece and said second piece, and a movable support, connected to said second hole in said first and second piece, and pivotable relative to said second hole in said first and second piece.

4. A device as in claim 2, further comprising a connection part, connecting together said first and second pieces.

6

5. A device as in claim 4, wherein said first and second pieces are connected together only at one end, and said concave and convex portions connect together said first and second pieces in a central section thereof.

6. A device as in claim 4, wherein said through hole is a hole that is less than  $\frac{1}{8}$  inch in diameter, size to receive a supporting cable.

7. A device as in claim 4, wherein said through hole is a hole that is sized to receive a chain.

8. A device as in claim 4, wherein said through hole includes inner surfaces which are sized to receive a chain in a way that prevents rotation of the chain.

9. A device as in claim 4, wherein said connection part loosens a connection between said first and second pieces and allows a loosened connection to separate said first and second pieces, but does not allow any parts on said first and second pieces to come loose.

10. A slider device, comprising:

a first piece made of structural material, having first and second ends, and having holes at said first and second ends,

a second piece made of structural material, having first and second ends, with said first end of said second piece being adjacent said second end of said first piece, and said second piece having holes at said first and second ends, where said hole on said first end of said first piece matches a location with a hole on said second end of said second piece to form a first hole that extends through both said first and second pieces;

said first and second pieces including a connection part in said first hole, that allows connection between said first and second pieces and when loosened, allows rotation between said first and second pieces;

each of said first and second pieces including concave and convex surfaces thereon, and surfaces defining a through hole,

where said concave surface of said second piece mates with said convex surface of said first piece, and said convex surface of said second piece mates with said concave surface of said first piece, and where said surfaces defining said through holes mate with said surfaces defining said through hole of said first piece, where said first and second piece collectively define a complete through hole.

11. The device as in claim 10, wherein said hole at said first end of said first piece matches in location with said hole at said second end of said second piece to form said first hole and a hole at said second tip end of said first piece matches in location with a hole at said first tip end of said second piece to form a second hole.

12. The device as in claim 11, further comprising a movable support, connected to said second hole in said first and second piece, and pivotable relative to said second hole in said first and second piece.

13. A device as in claim 10, wherein said first and second pieces are connected together only at one end, and said concave and convex portions connect together said first and second pieces in a central section thereof.

14. A device as in claim 10, wherein said through hole is a hole that is less than  $\frac{1}{8}$  inch in diameter, size to receive a supporting cable.

15. A device as in claim 10, wherein said through hole is a hole that is sized to receive a chain.

16. A device as in claim 10, wherein said through hole includes inner surfaces which are sized to receive a chain in a way that prevents rotation of the chain.

17. A device as in claim 10, wherein said connection part loosens a connection between said first and second pieces and allows a loosened connection to separate said first and second pieces, but does not allow any parts on said first and second pieces to come loose.

5

\* \* \* \* \*